




Testing the Starbucks Barista Heating Element

This guide shows how to take apart the Barista to get to the boiler for either repair or maintenance.

Written By: Brian McMurray

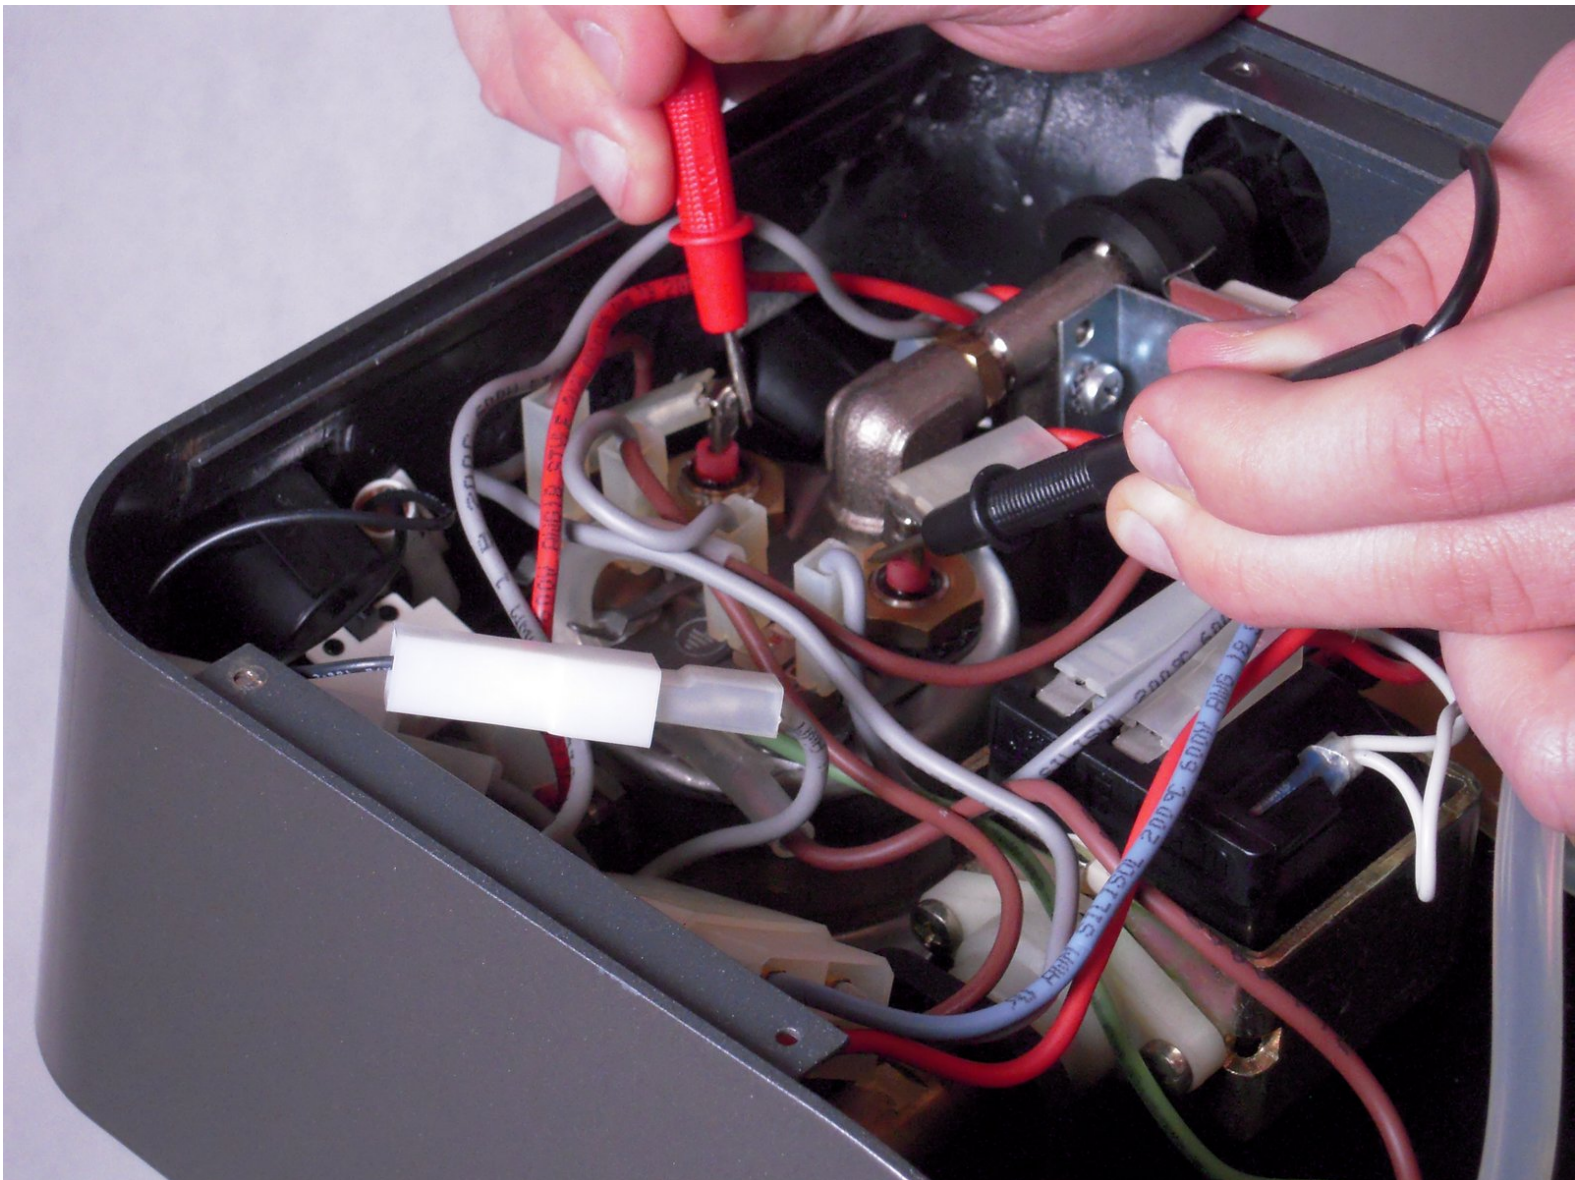


INTRODUCTION

The boiler heat the water to the needed temperature for both the steam wand and portafilter. If your machine isn't heating up, one possible cause is a failed heating element inside the boiler. This guide will show you how to test for this.

TOOLS:


- [Phillips #1 Screwdriver](#) (1)
 - [Digital Multimeter](#) (1)
-

Step 1 — Testing the Starbucks Barista Heating Element

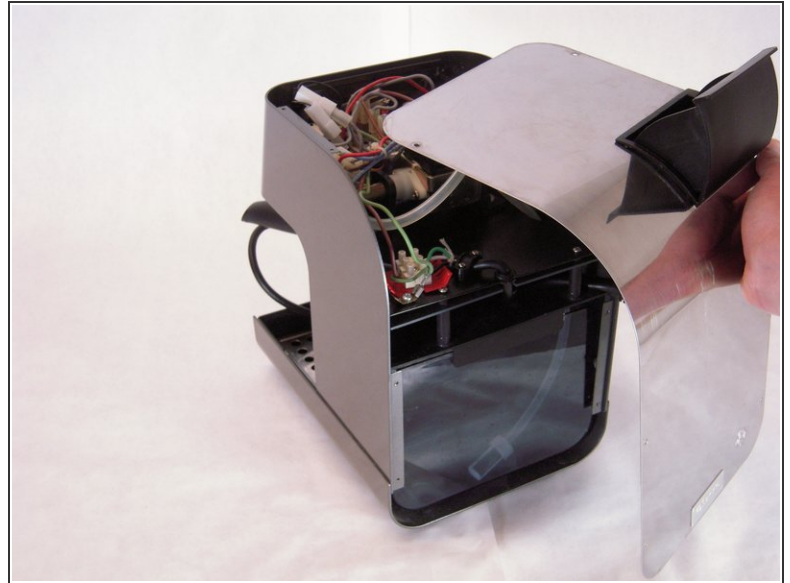

- Remove the 6 Phillips #1 screws from the back panel.
- Remove the back panel.

Step 2

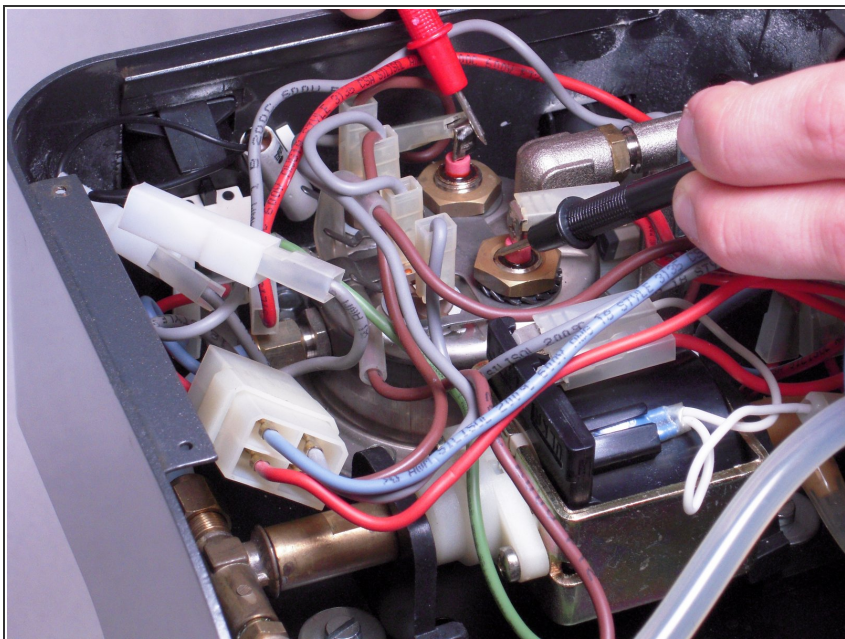

- Make sure the machine is turned off and unplugged.
- Set your voltmeter in continuity mode and place the leads on the two 90 degree prongs on the boiler's heating element.
- ⓘ It does not matter which lead touches which prong as you're just testing for a break, or "open" in the heating element circuit."
- If the voltmeter shows 0, or "open", then there is an issue with the heating element's continuity and it needs to be replaced.
- If given a reading, then your heating element is fine.

Step 3



- In the water reservoir, place mixture of de-calcifying agent and water as directed on the product label.
- Place a cup, to catch fluid, underneath the portafilter.
- Run Barista, as if making coffee, for the amount of time directed by the de-calcifying product.
- See the links section of the device page for further directions.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-11 12:43:22 PM.