



Dell Vostro V130 Memory Module Replacement

Written By: Johnathan Hammond



 **TOOLS:**

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Remove the Screws



- Remove the screws that secure the base cover to the computer.

Step 2 — Removing the Base Cover




- Slide the base cover towards the front of the computer. Lift it up and away from the computer.
- If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 3 — Disconnecting the Battery



- Lift the black cable-release clip to release the battery cable from the connector on the system board and disconnect the battery cable.

Step 4 — Remove Battery Screws

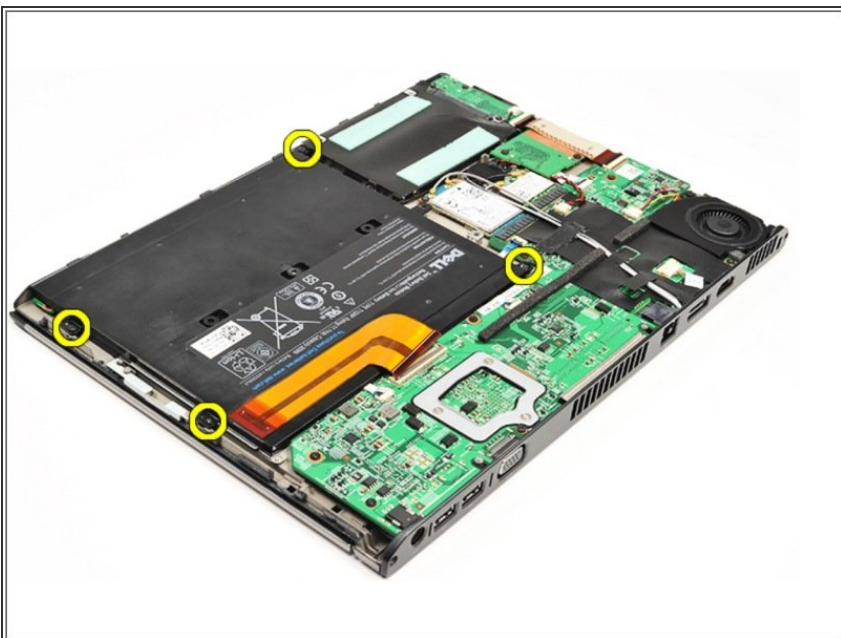

- Remove the screws that secure the battery to the computer.

Step 5 — Lift the Battery



- Lift the battery up and away from the computer.
- ★ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 6 — LED Cover



- Starting on the right side of the system, use a plastic scribe to pry up the LED cover from the computer.

Step 7 — Removing the LED Cover



- Pull the LED cover toward the keyboard and remove it from the computer.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 8 — Memory Module



- Use your fingertips to spread apart the securing clips on each end of the memory module connector until the memory module pops up.

Step 9



- Remove the memory module from its connector on the system board by drawing the module from the system board at 45-degree angle.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

This document was last generated on 2019-07-21 04:21:02 PM.