



LG K7 Headphone Jack Replacement

Replace a malfunctioning Headphone Jack that may be causing a lack of audio through headphone.

Written By: James Ngo



INTRODUCTION

A malfunctioning headphone jack is often the problem if you are experiencing a lack of audio through headphones. Replacement headphone jacks can be found online.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [JIS #00 Screwdriver](#) (1)
-

Step 1 — Battery



- Place a fingernail in slot at in the bottom edge of the phone.
- Pull up on the back panel while holding down the rest of the phone steady with your hand.


⚠ Do not to pull too hard on the back panel or you may break it.

Step 2



- Place a fingernail in the slot at the bottom edge of the battery.
- Pull the battery out.

Step 3 — Headphone Jack

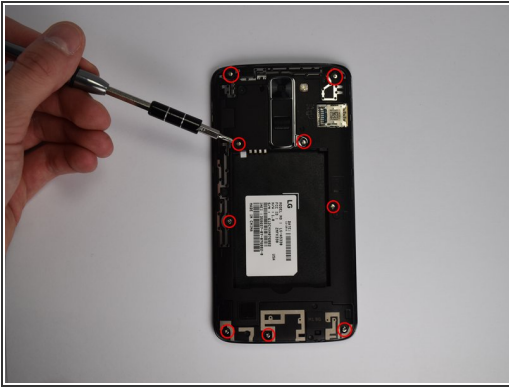


- Remove the nine frame screws with a #J00 screwdriver.
 - ⓘ The bottom three screws release the port cover at the bottom of the phone. The cover should lift off easily once the screws are out.
- Pop the camera button frame off with a spudger. The home button should come off along with the frame.
- ⚠ Be gentle with the frame when removing it. The plastic is very thin and can easily break.

Step 4



- Use a plastic opening tool to separate the screen from the outer frame.
 - ⓘ The frame is held to the rest of the phone with plastic tabs. Release each tab one at a time around the phone for the easiest removal.
- ⚠ Do not bend the outer frame or screen when separating them. This will severely damage the phone.

Step 5

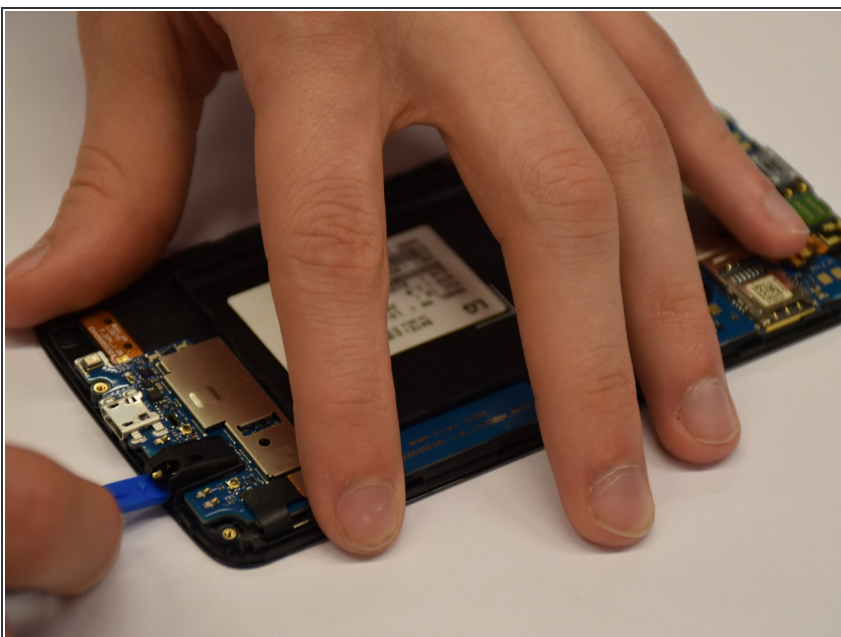

- Line up a plastic opening tool underneath the headphone jack and hold the main body of the phone down.
 - Lift or the plastic opening tool to separate the headphone jack from the main body of the phone.
- ⚠ Be careful to not damage the components that the headphone jack sits in.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-11 02:55:17 AM.