



Dell Inspiron n5110 Display Assembly Replacement

Written By: Terrence15



INTRODUCTION

In this guide, we will be showing you how to remove and replace the Display Assembly.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Remove the Screws




⚠ WARNING: Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in ["Before You Begin"](#).

⚠ CAUTION: To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on your computer).

- Remove the two screws that secure the display assembly to the computer base.

Step 2 — Disconnecting the Display Cable

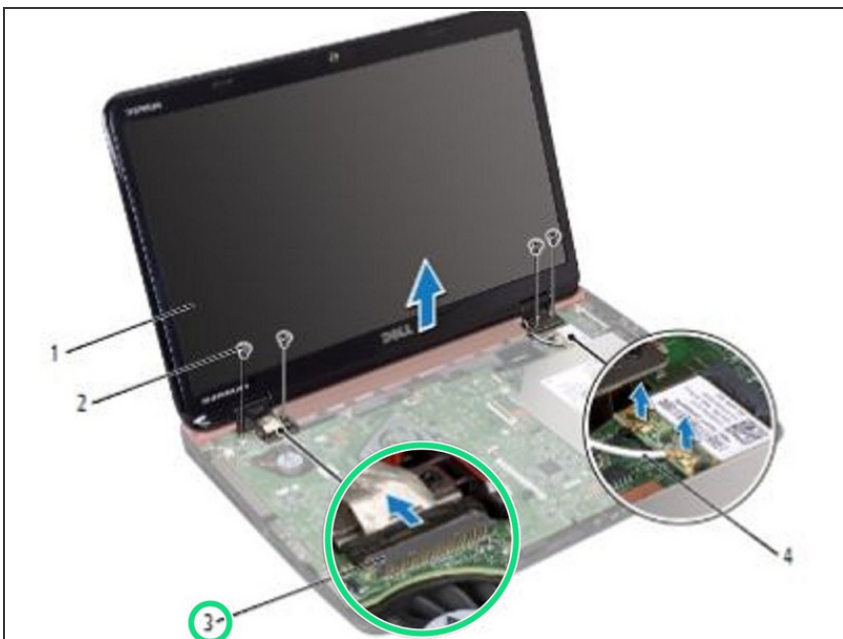

- Disconnect the display cable and touch-screen cable from the system-board connectors.

ⓘ NOTE: The touch-screen board is optional and may not be present in your computer.

Step 3 — Note the Routing



- Note the routing of the Mini-Card antenna cables and remove the cables from the routing guides.

Step 4 — Remove the Screws



- Remove the four screws that secure the display assembly to the computer base.

Step 5 — Lifting the Display Assembly.



- Lift the display assembly off the computer base.

Step 6 — Placing the Display Assembly



- Place the **NEW** display assembly in position and replace the four screws that secure the display assembly to the computer base.

Step 7 — Route the Cables



- Route the Mini-Card antenna cables through the routing guides.

Step 8 — Connect the Display Cable



- Connect the display cable and touch-screen cable to the connectors on the system board.

Step 9 — Replace the Screws



- Replace the two screws that secure the display assembly to the computer base.

This document was last generated on 2018-08-27 08:55:33 PM.