



Alcatel Jitterbug Smart Camera Replacement

A guide to remove and replace rear camera to Jitterbug Smart.

Written By: Gavin Le



INTRODUCTION

Use this guide to replace the logic board in your Alcatel Jitterbug Smart



TOOLS:

- [JIS #000 Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Metal Spudger](#) (1)



PARTS:

- [rear camera \(5.0 MP, auto-focus, flash\)](#) (1)

Step 1 — Rear Camera



- Pry back cover open with a medal spudger, or your fingernail, in the divot at the bottom left corner of the phone.
- Lift open case by the corner nearest the divot and remove it from the phone.

Step 2





- Remove the 13 1 mm Phillips screws with JIS #000 Screwdriver.

Step 3



- Gently pry off the Mid frame from the phone using a Metal Spudger.

Step 4

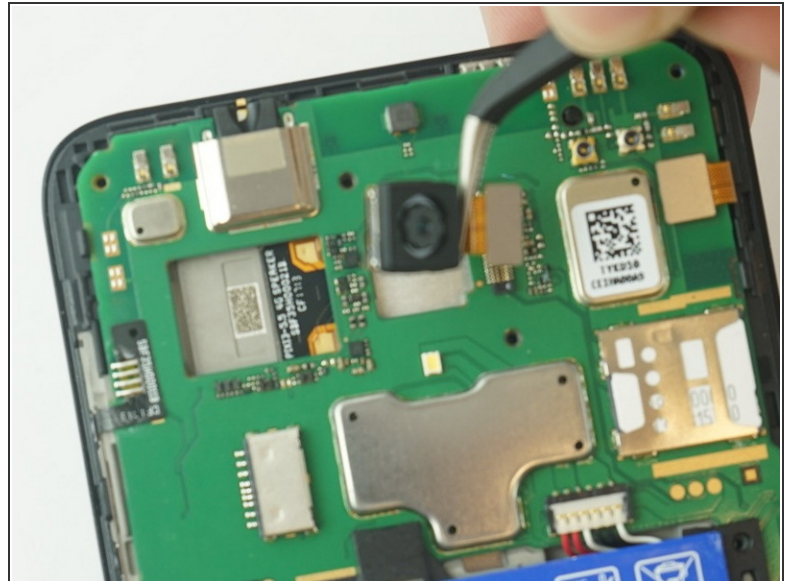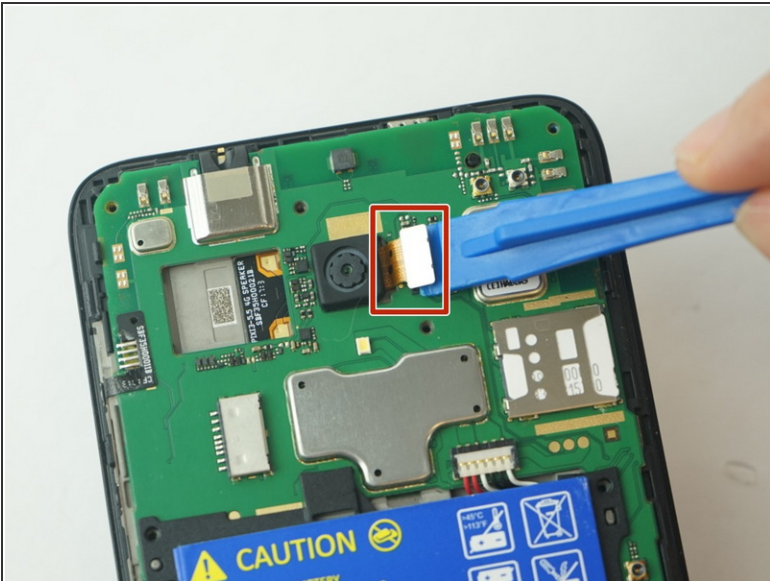

- Use the Plastic Opening tools to gently dislodge the broken camera from the inside of the phone.
 - Use a tweezers to pull the camera connector from its port.
- ⚠ Be careful not to tear the camera from its connection.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-06-02 02:06:51 AM.