



Dell Vostro 3561 Hard Drive Replacement

Written By: Johnathan Hammond



 **TOOLS:**


- [Phillips #0 Screwdriver \(1\)](#)
-

Step 1 — Sliding the Battery Release Latch




- Flip the computer over.
- Slide the battery release latch to the unlock position.

Step 2 — Slide the Battery Release Latch

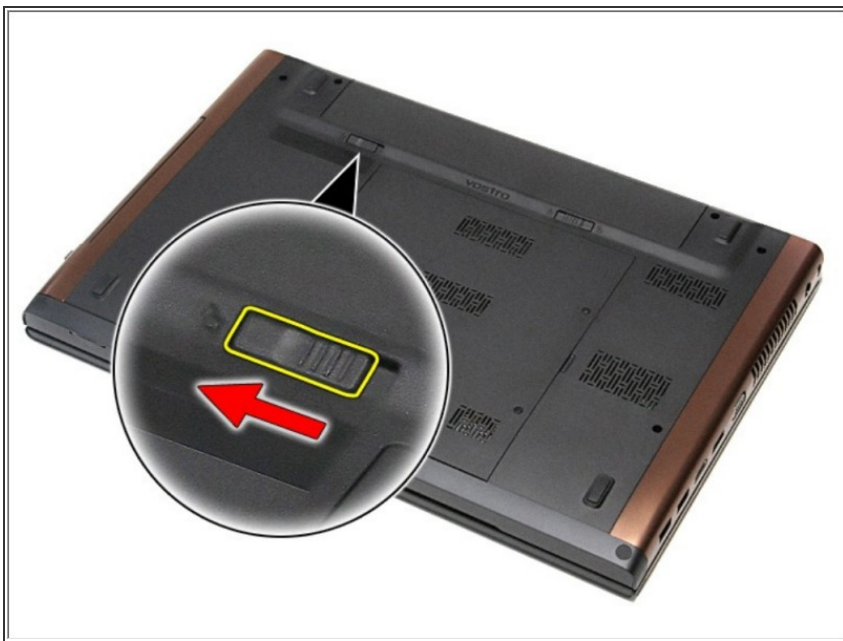

- Slide the other battery release latch to the unlock position.

Step 3 — Removing the Battery

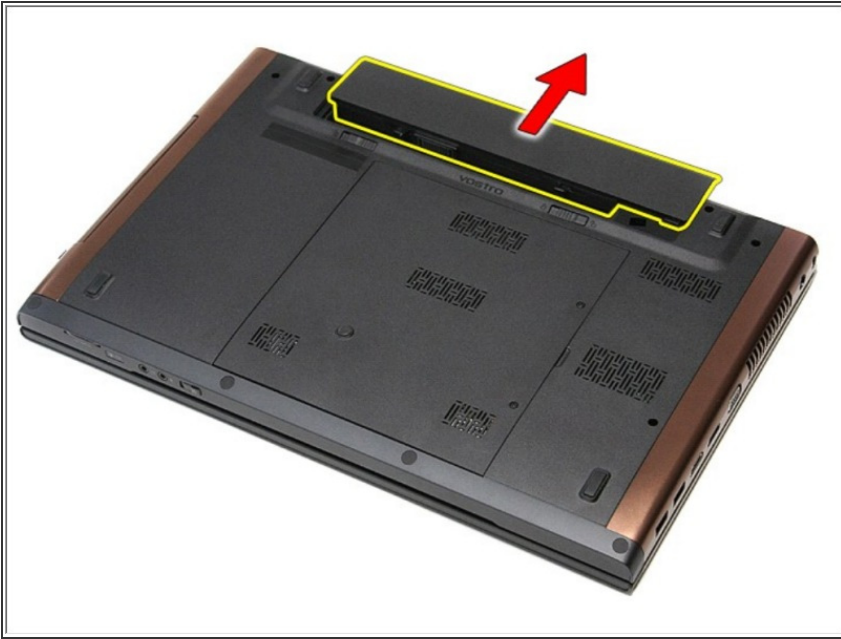

- Slide the battery and remove it from the computer.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 4 — Remove the Screws



- Remove the screws that secure the base cover to the computer.

Step 5 — Removing the Base Cover



- Lift up the base cover and remove it from the computer.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

Step 6 — Hard Drive



- Remove the screw that secures the hard-drive assembly to the computer.

Step 7




- Slide the hard-drive assembly towards the center of the computer and lift it up and away from the computer.

Step 8



- Remove the screws that secure the hard-drive bracket to the hard drive.

Step 9

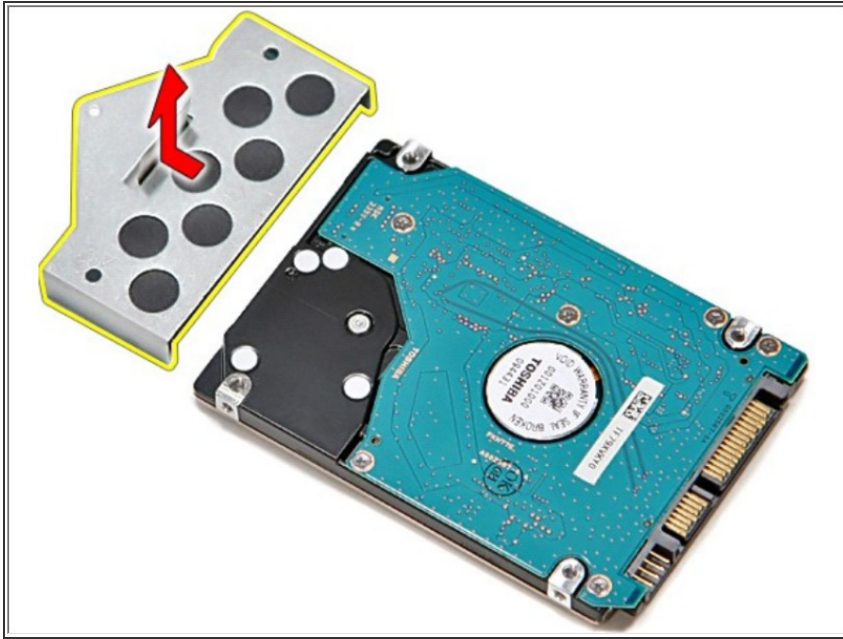

- Lift up the hard-drive bracket and remove it from the hard-drive assembly
- ★ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-10-19 01:34:51 AM.