




# Disconnecting Microphone from Motherboard

Prerequisite guide for any step involving disconnecting the microphone

Written By: Timothy Forrest

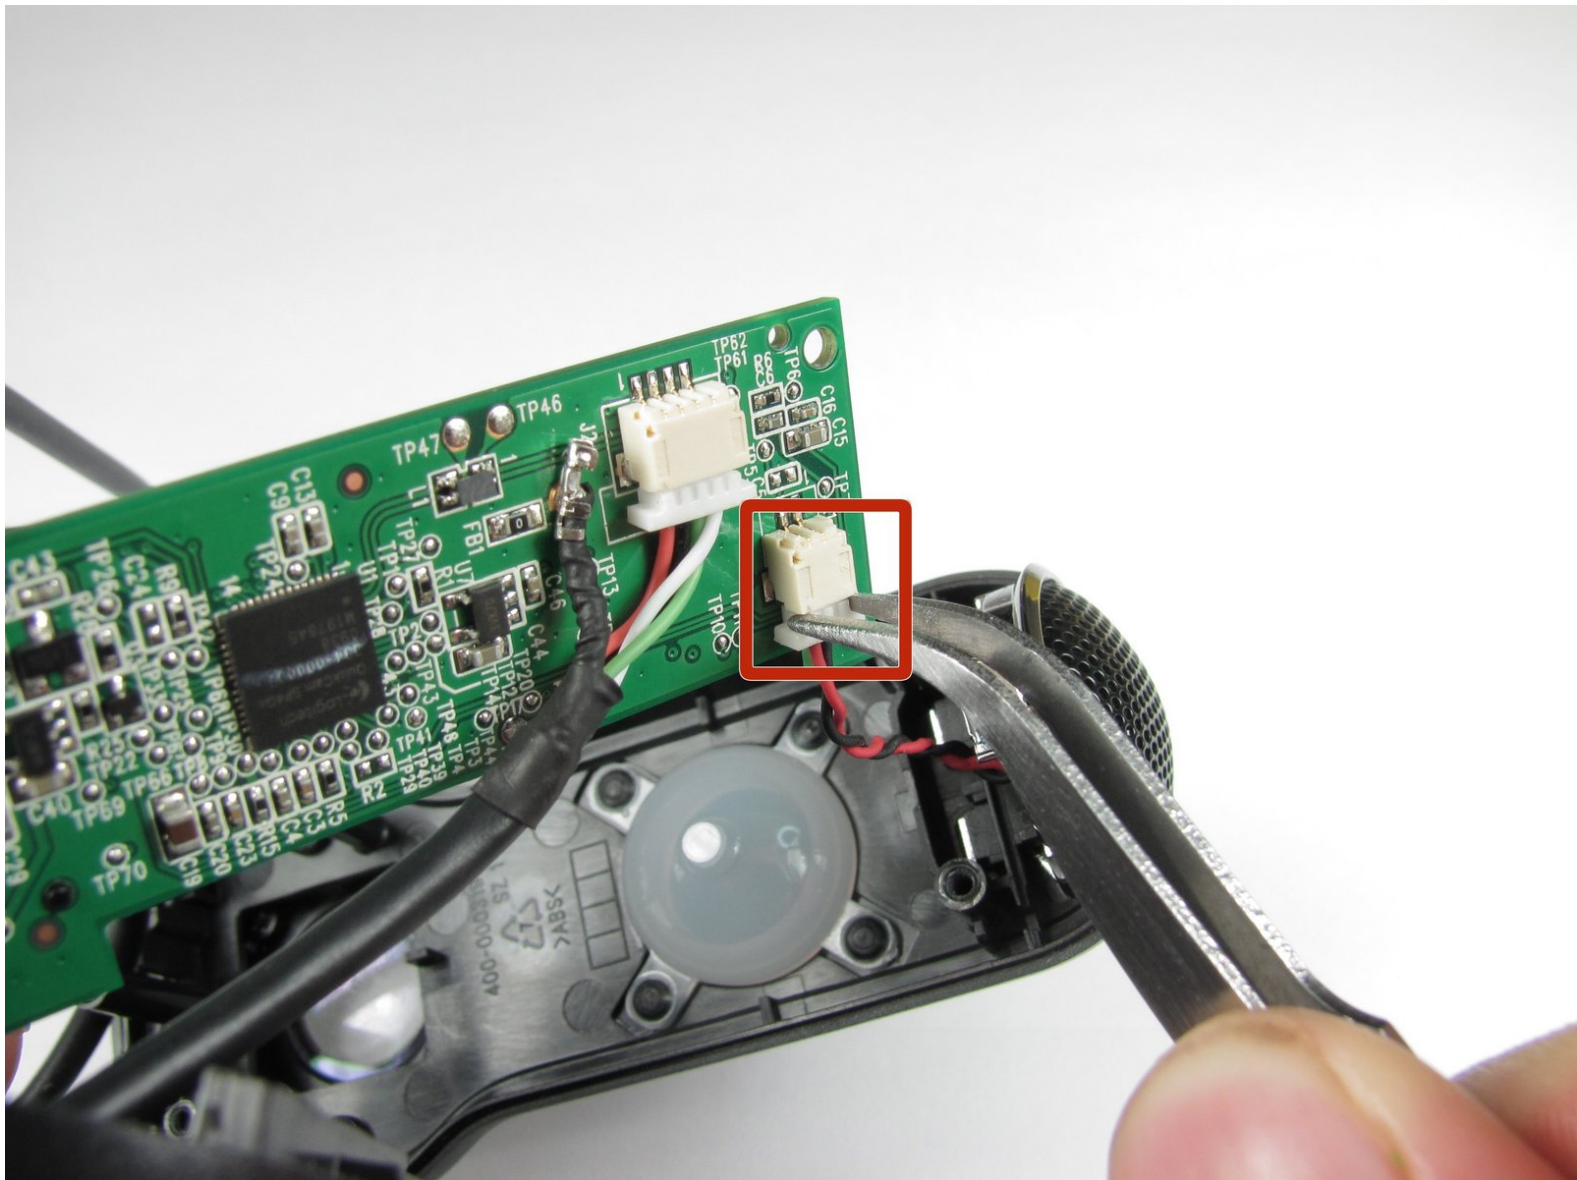

 **TOOLS:**

- [Tweezers](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Front and Back Cover





- Remove the two 8mm Phillips#0 screws on the back cover.

⚠ The motherboard is attaching the two covers together, so don't separate them entirely just yet.

ⓘ There is a button that loosens as the Phillips screws are removed. Don't be alarmed if it falls out.

## Step 2

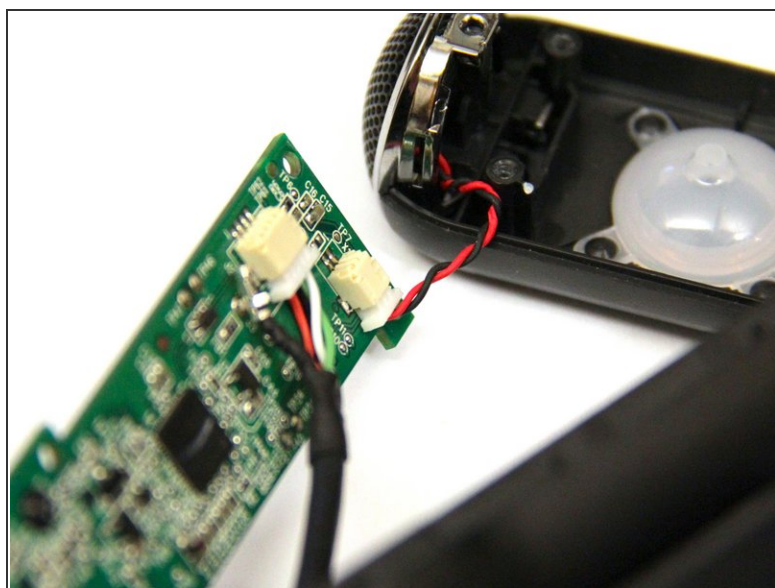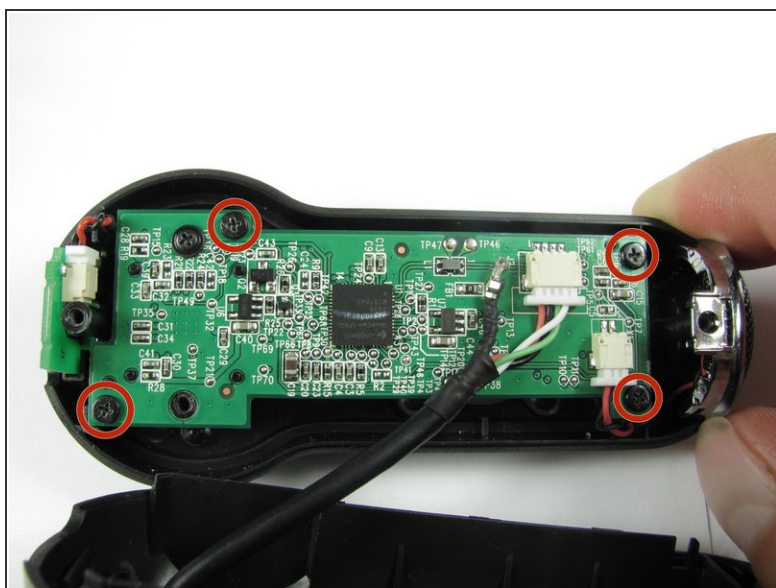


- Remove the four 6mm Phillips#0 screws connecting the motherboard and front cover.

**DO NOT** detach the wire connecting the motherboard to the front cover.



### Step 3 — Microphone Connection

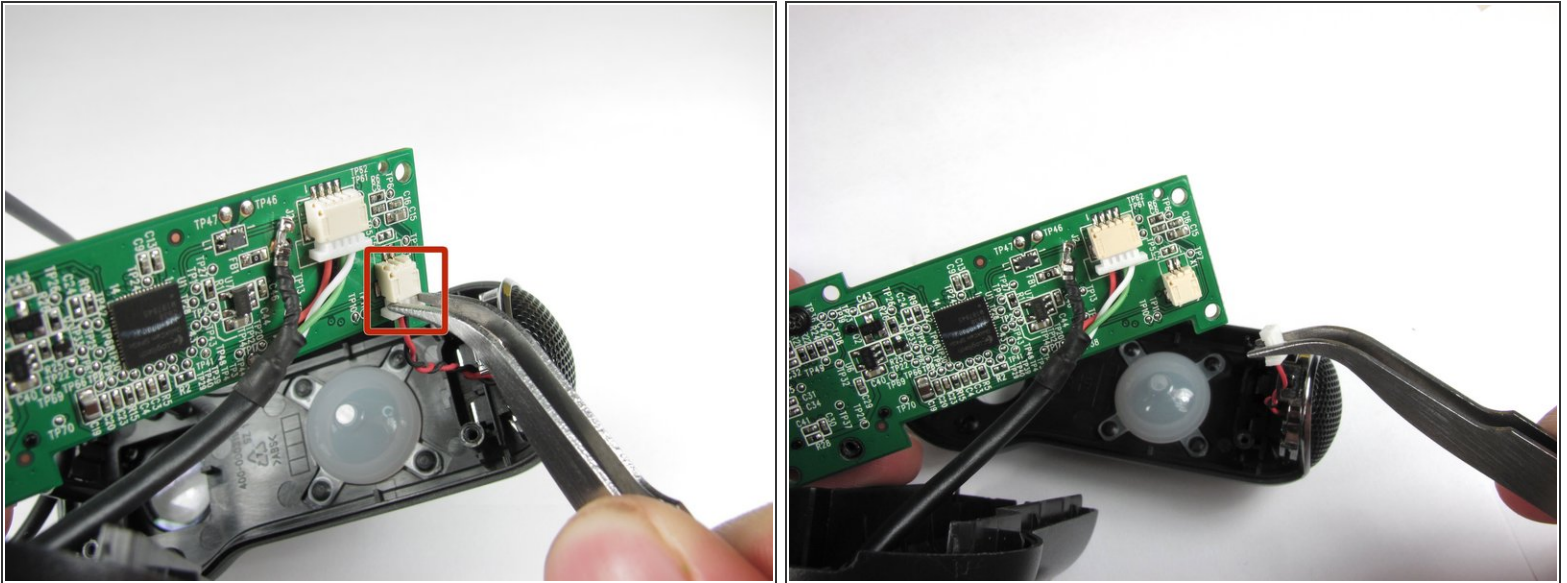

- Grasp the white wire connector between the tabs and the socket.
- Wiggle the connector back and forth to remove the front cover from the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-08-17 04:00:06 PM.