




# Samsung Galaxy J3 Luna Pro Front and Back Camera Replacement

This Guide will show you how to disassemble the phone to replace the front and back camera of the Samsung Galaxy J3 Luna Pro.

Written By: Jay Patel

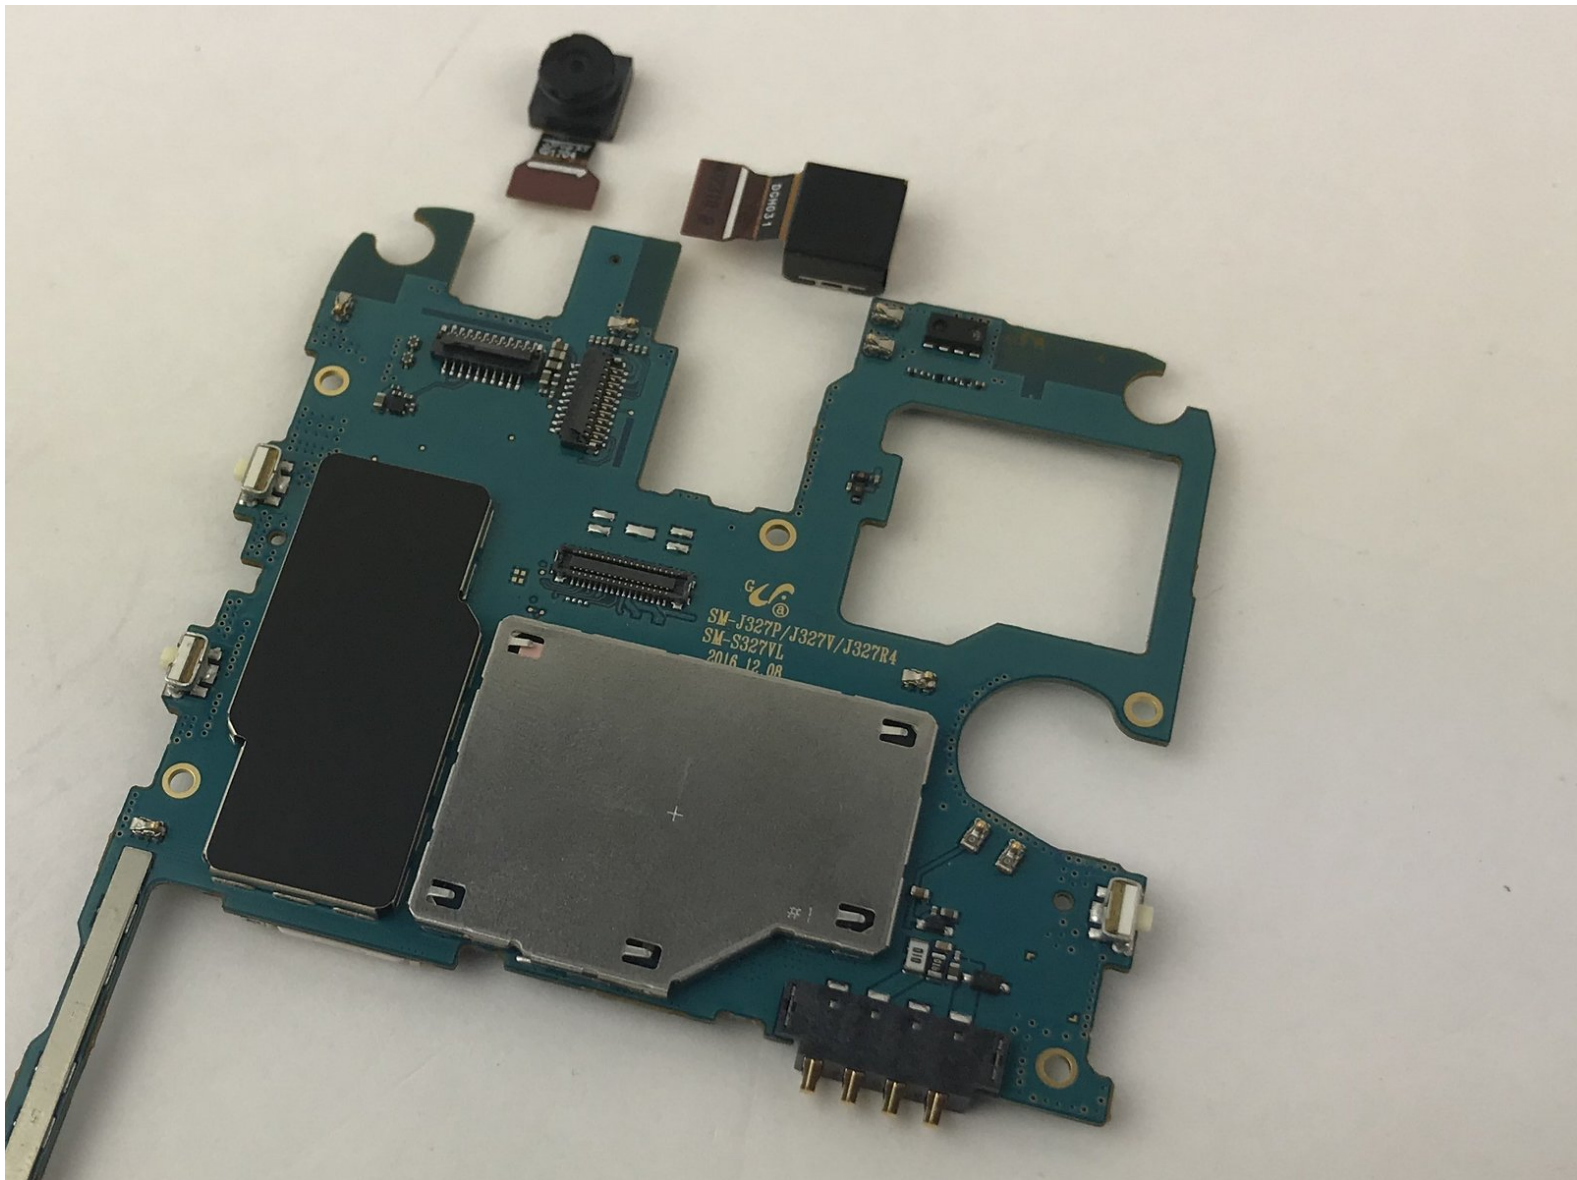

---

## INTRODUCTION

Have you ever dropped your phone and sighed with relief because the screen didn't hit the ground. You happily pick up your phone only to then be saddened by the fact that your camera lens is now shattered. Well this guide will show you the step by step process of how to replace the camera on the Samsung Galaxy J3 Luna Pro.

---

### TOOLS:

- [Suction Handle](#) (1)
  - [Spudger](#) (1)
  - [Metal Spudger](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [JIS #00 Screwdriver](#) (1)
-

## Step 1 — Motherboard Change




- Turn off the phone.
- Remove the back cover and battery


## Step 2



- Attach a suction cup to the screen and pry upwards.
- Insert the plastic opening tool into the gap under the screen and work your way around the perimeter.


 Don't remove the screen completely as there are cables still connection the two pieces.

### Step 3

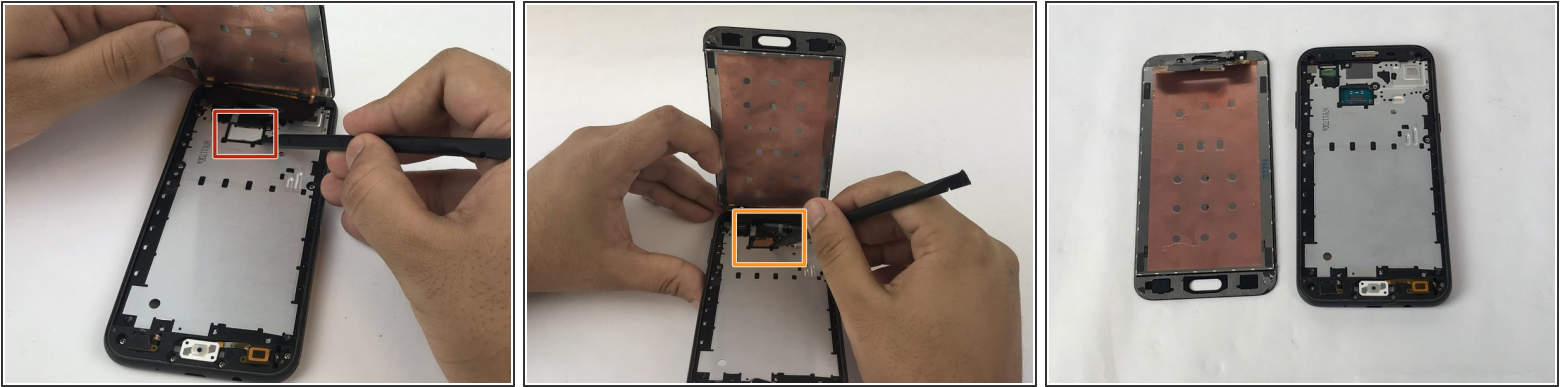

- Use the pointy end of a spudger to remove the white plastic cover from the display cover.
- Use the spudger to pry up the display cable from the motherboard.
- Remove the screen.


### Step 4

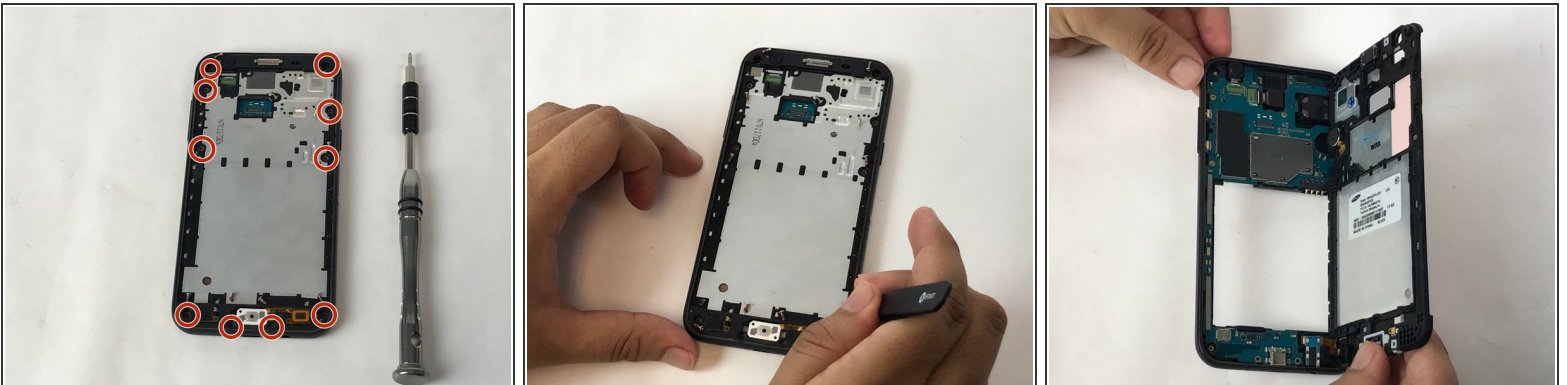

- Remove the eleven JIS 00 screws from the mid-frame.
- Using a spudger, pry the mid-frame from the screen.






## Step 5

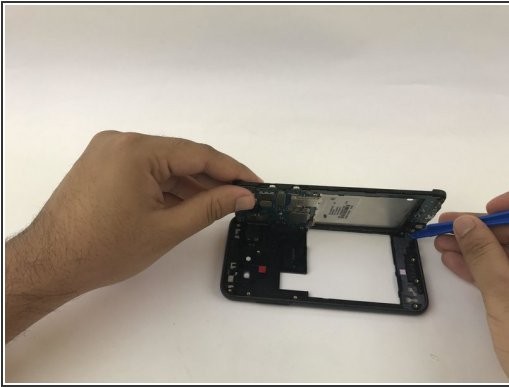

- Remove the motherboard from the mid-frame.

## Step 6 — Front and Back Camera

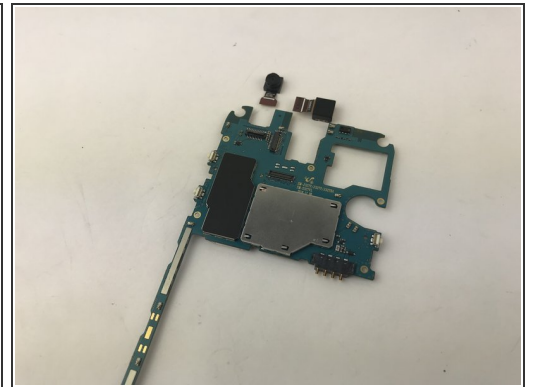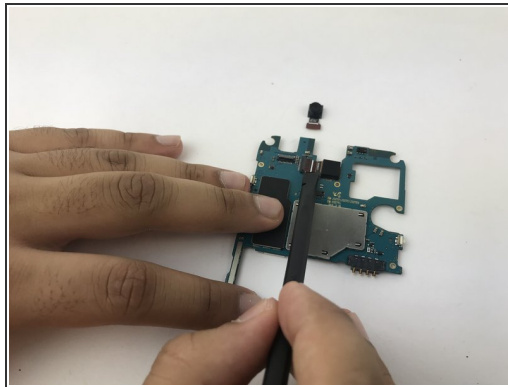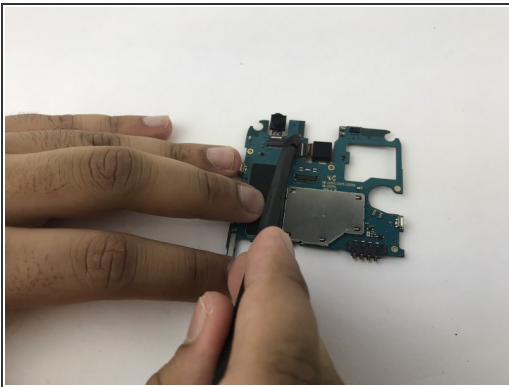

- Use a spudger to flip up the retaining flaps on the front and rear camera ribbon cable [ZIF](#) sockets.
- Pull the cables out of the ZIF sockets.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-23 10:55:40 AM.