



Dell Vostro 3500 Hard Drive Replacement

Written By: Johnathan Hammond




INTRODUCTION

In this guide, we will show you how to remove and replace the Hard Drive.

TOOLS:


- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Sliding the Battery Latch

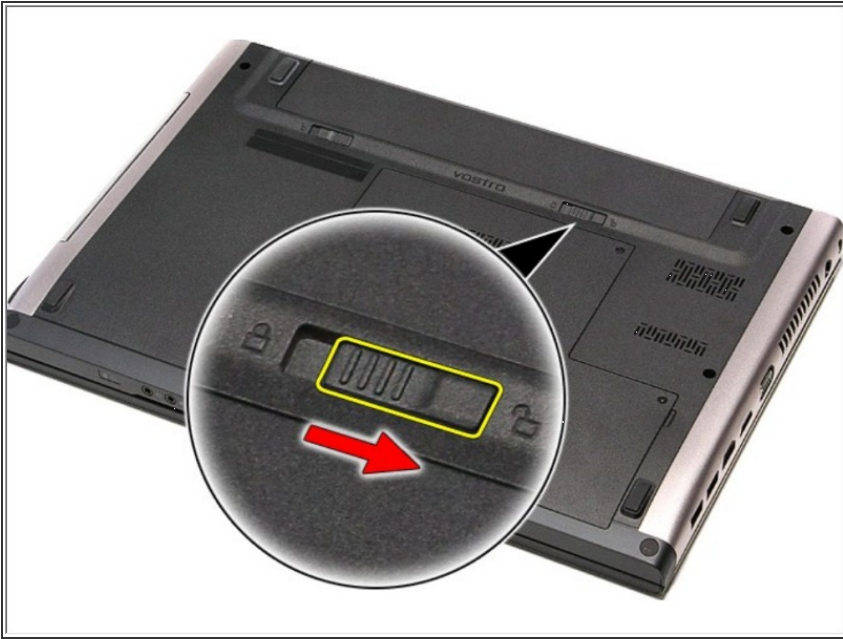


- Flip the computer over.
- Slide the battery release latch to the unlock position.

Step 2 — Sliding the Battery Release Latch

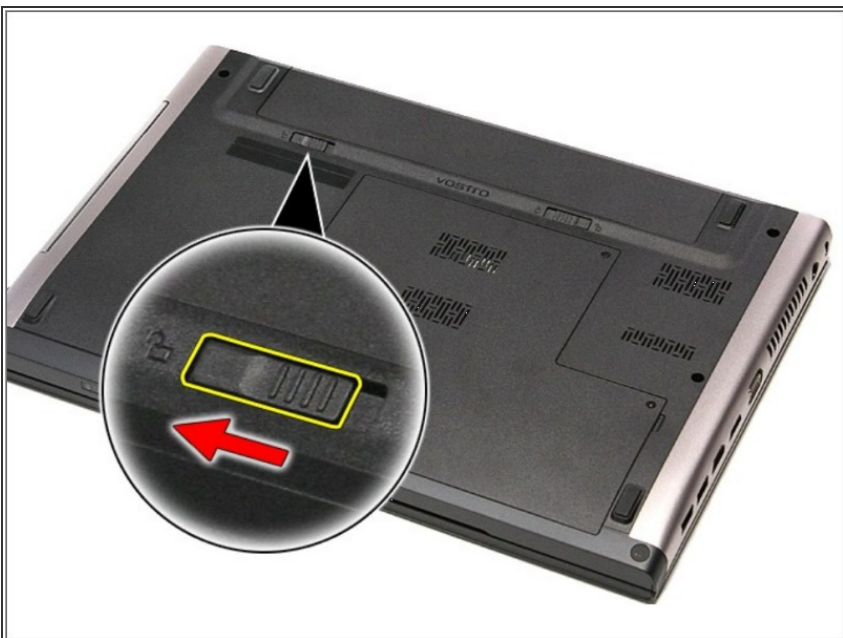

- Slide the other battery release latch to the unlock position.

Step 3 — Removing the Battery

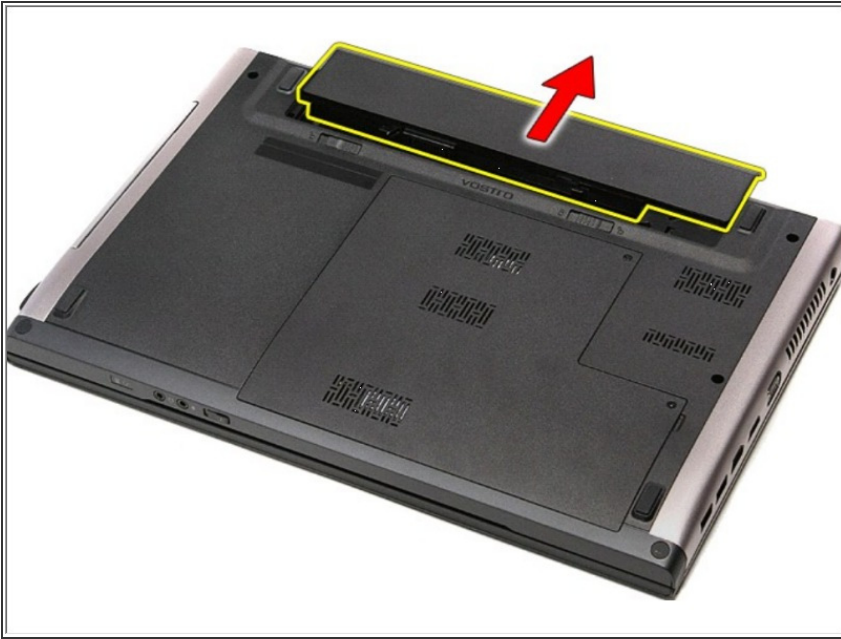


- Slide the battery and remove it from the computer.

Step 4 — Remove the Screws



- Remove the screws that secure the base cover to the computer.

Step 5 — Removing the Base Cover

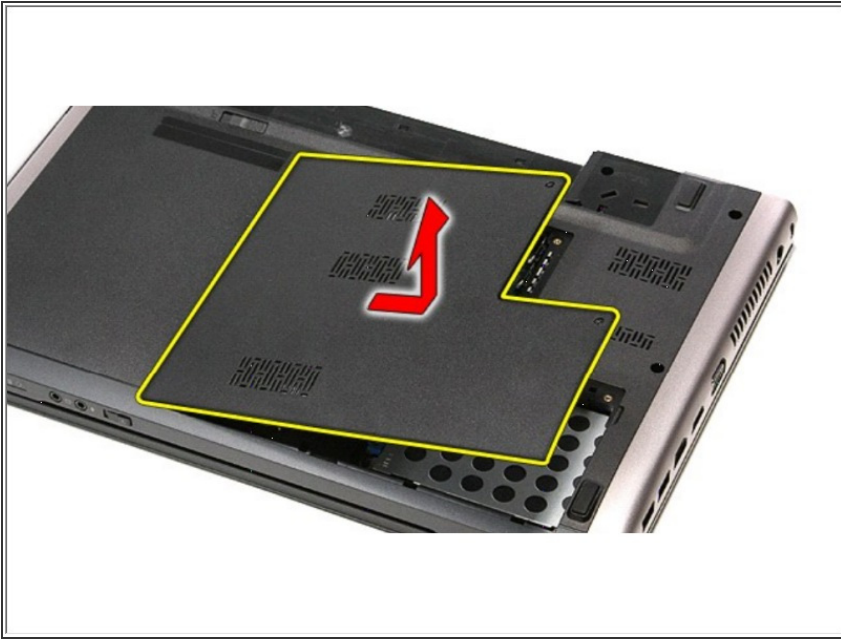

- Lift up the base cover and remove it from the computer.

Step 6 — Remove the Screws




- Remove the screws that secure the hard-drive assembly to the computer.

Step 7 — Sliding the Hard-Drive Assembly




- Slide the hard-drive assembly towards the center of the computer.

Step 8 — Lifting the Hard-Drive Assembly

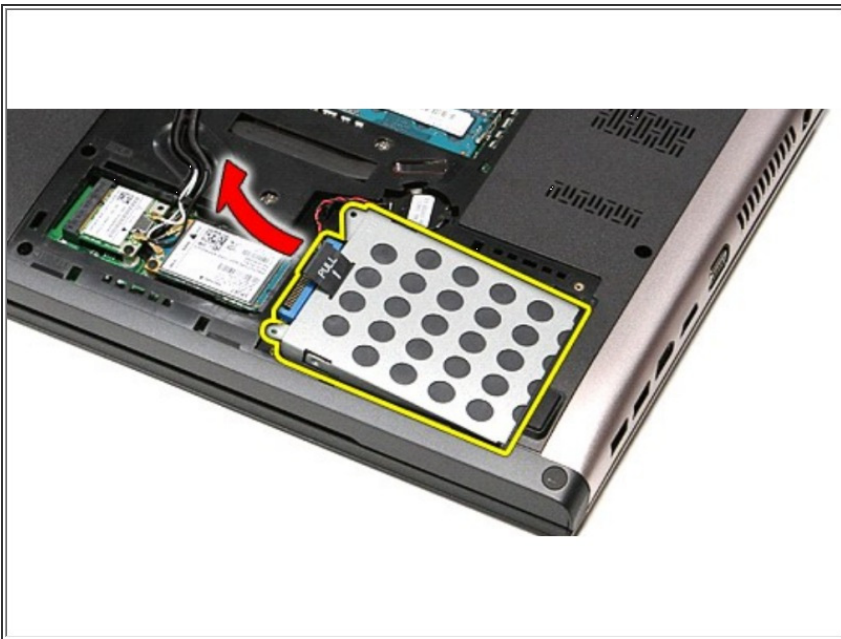

- Lift the hard-drive assembly up and away from the computer.

Step 9 — Remove the Screws

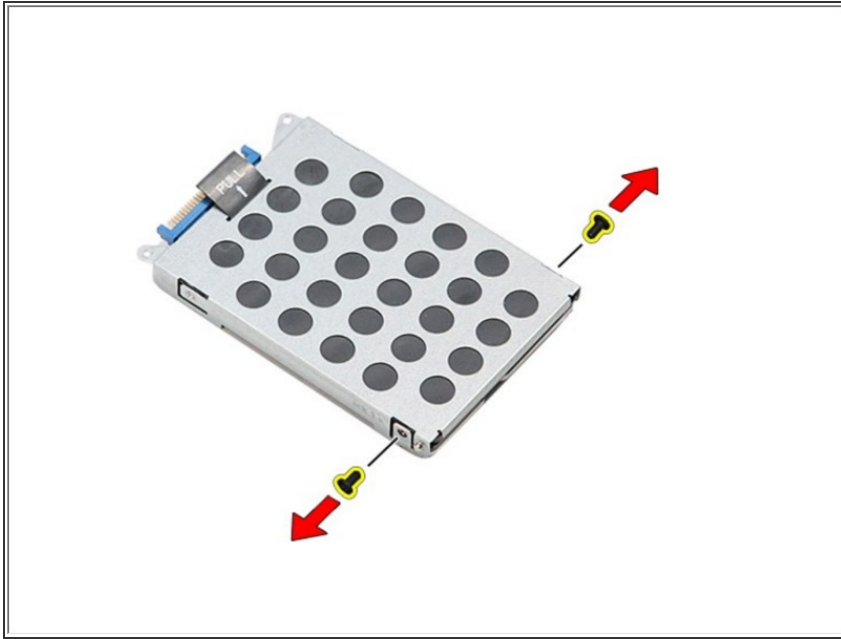


- Remove the screws that secure the hard-drive bracket to the hard drive

Step 10 — Remove the Hard-Drive Adapter



- Remove the hard-drive adapter from the hard-drive assembly.

Step 11 — Lifting the Hard-Drive Bracket

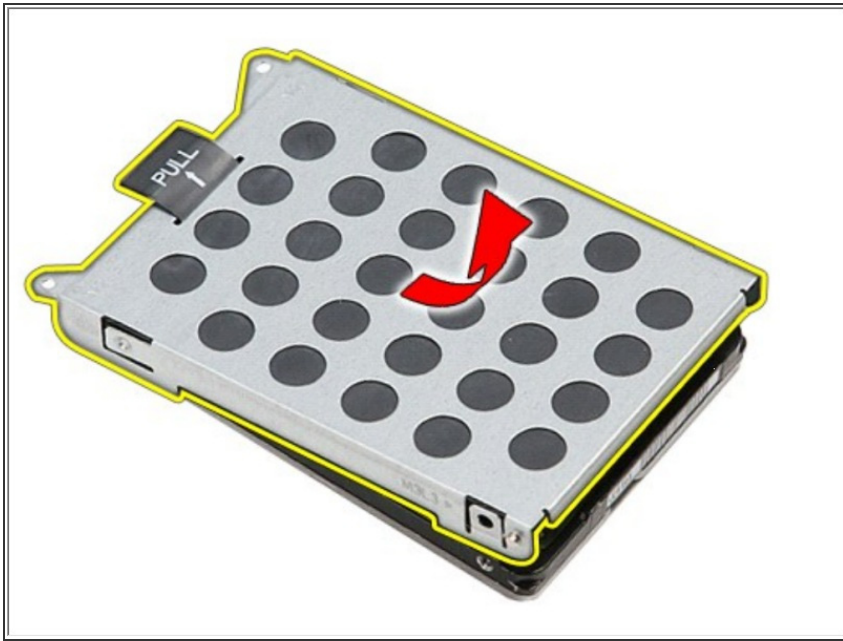

- Lift the hard-drive bracket up and away from the hard drive.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-07-23 08:39:57 PM.