




Apple Studio Display M7649 Rear Panel Replacement

Written By: Alan Truong

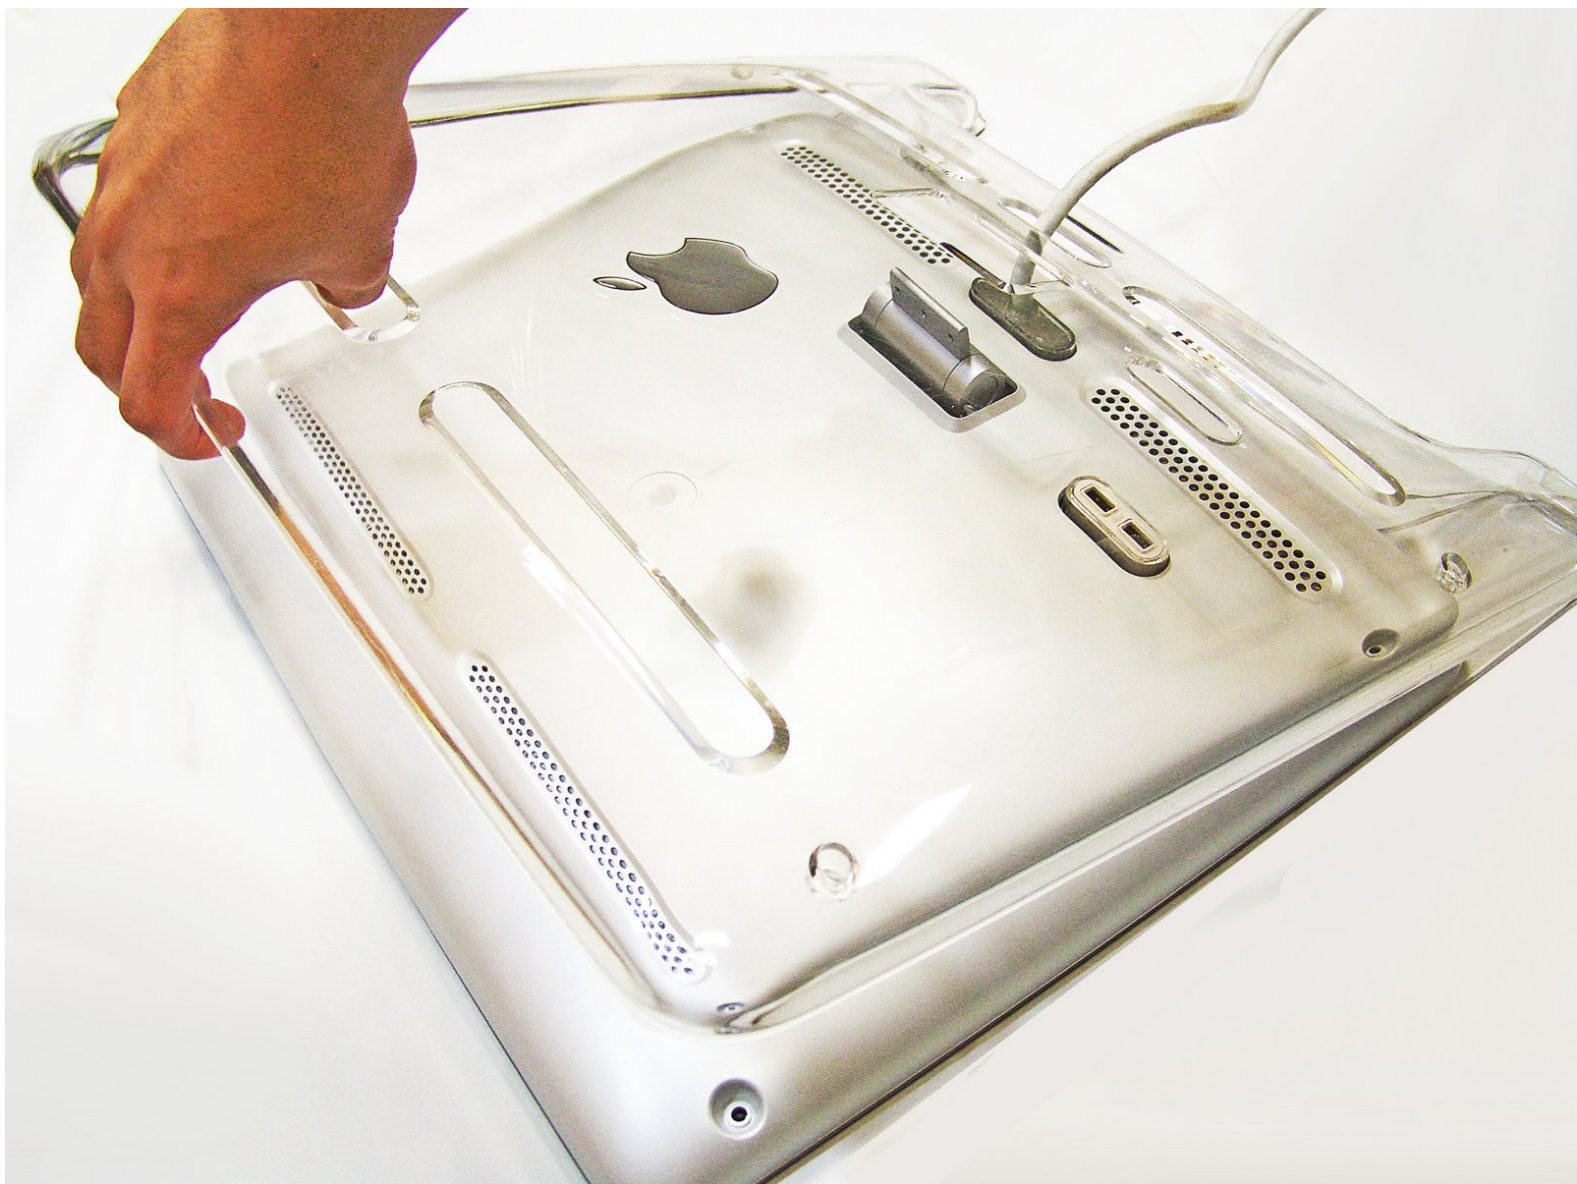



INTRODUCTION

Replacing the panels of the apple display.

TOOLS:

- [2 mm Hex Screwdriver](#) (1)
-

Step 1 — Stand

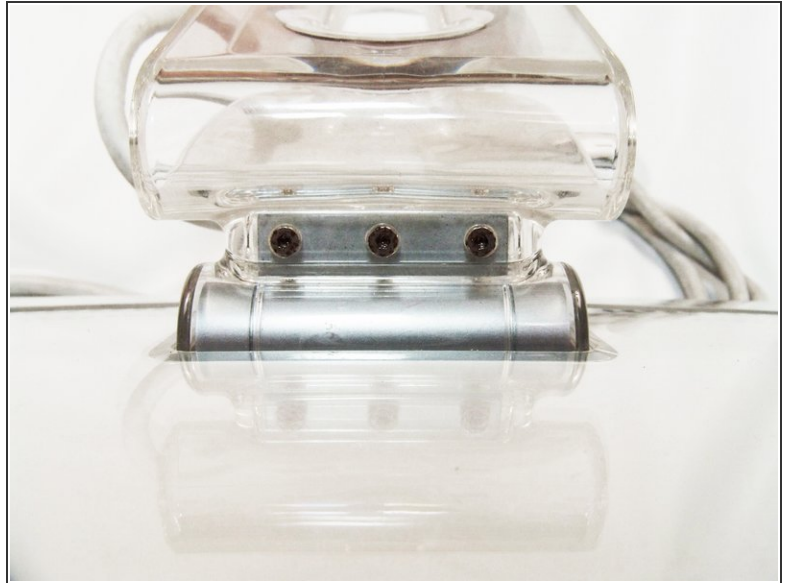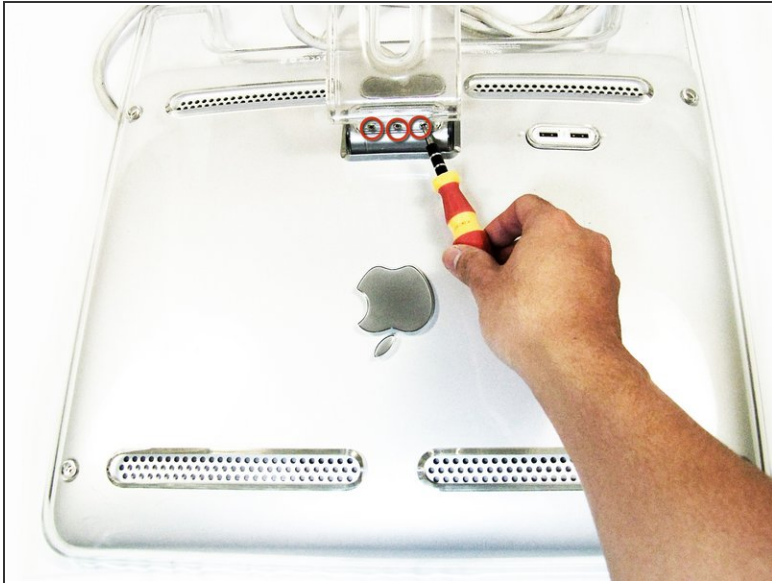


- Lay the display facing down with the stand away from you.
- Remove the three size 2.0 hex screws on the swing arm and remove the swing arm as well as the plastic shield under it.

Step 2 — Panels




- Remove the size 2.5 hex screws from each corner that connects the panels to the display and remove them.

Step 3

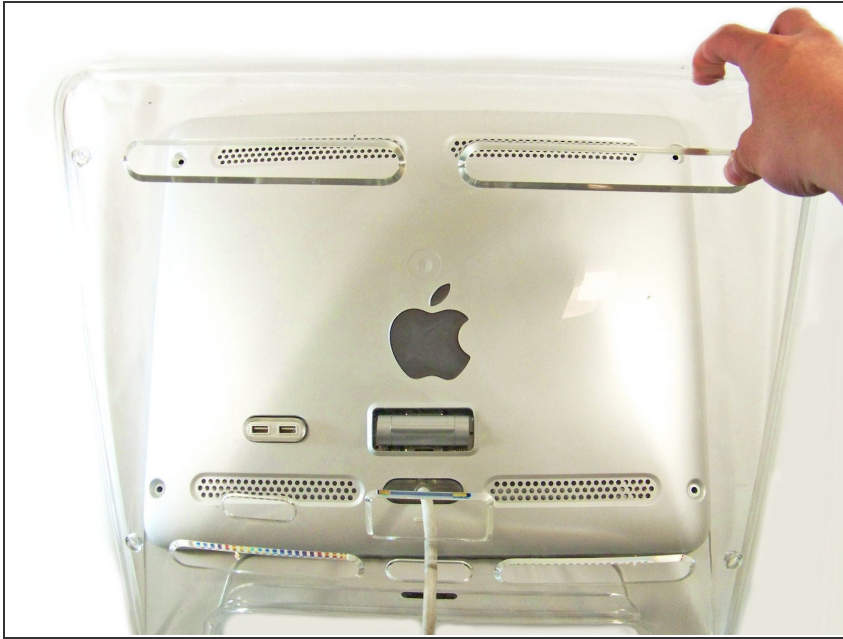

- Rotate the display so the legs of the display are now facing you
- Grip the top of the clear panel and lift it upwards, and pull the ADC cable through the hole.

Step 4

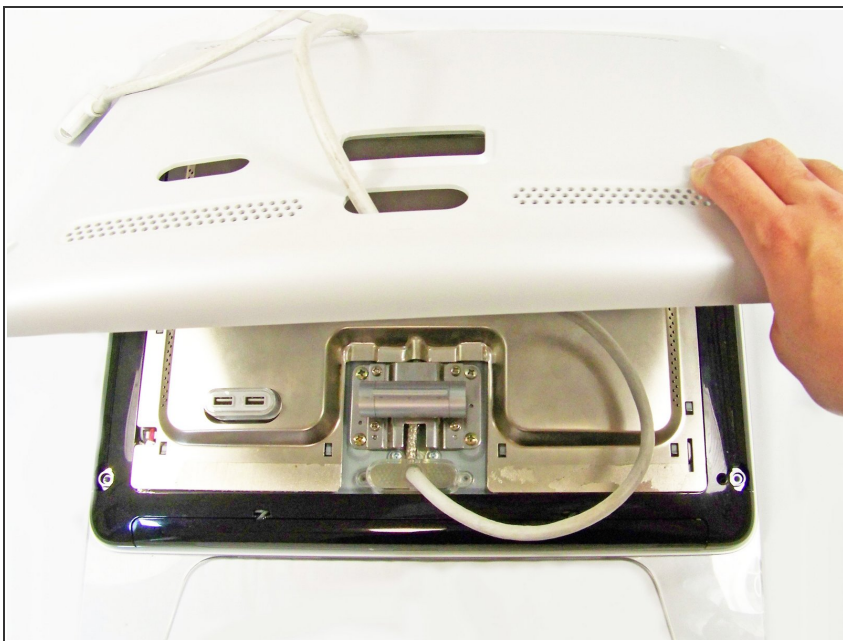

- Remove the grey back panel by lifting the bottom and pulling the ADC cable through the hole.