



Toshiba A1304T Logic Board Replacement

Use this guide to replace the Toshiba A1304T logic board

Written By: Christopher



 **TOOLS:**

- Flathead 3/32" or 2.5 mm Screwdriver (1)
-

Step 1 — Back panel




- Using a thumb-tack, push-pin, or similar pin, remove the four plastic stoppers located on the back panel.

Step 2




- With the T8 Torx Security Bit Screwdriver, remove the four screws in the designated locations.
- ⓘ The T8 Torx Security Bit Screwdriver can be substituted with a small flathead screwdriver. Screw removal may be slightly more difficult however.

Step 3

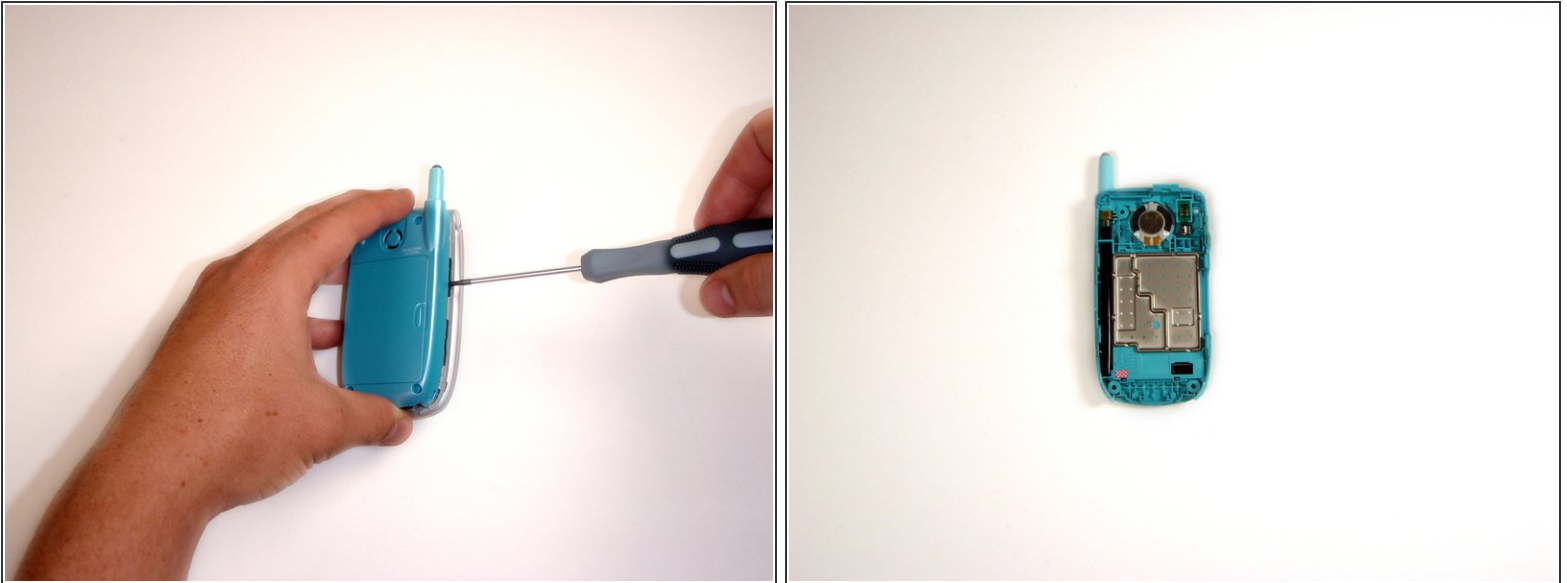



- If needed, use the flathead screwdriver to gently pry the panel from the phone.
- Using your fingers, lift the panel from the device.

Step 4 — Logic Board

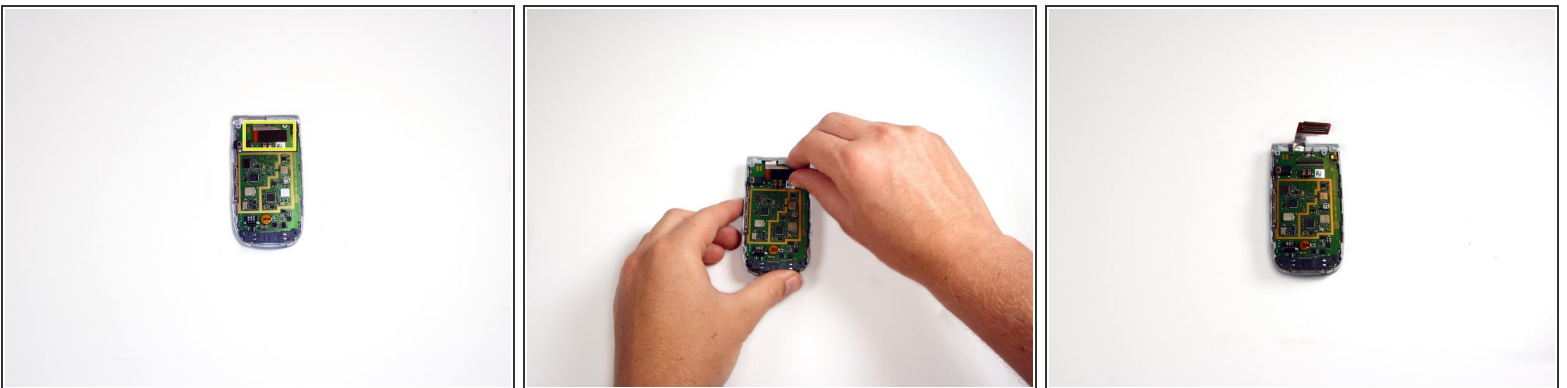



- Use your fingers to gently detach the ribbon wire from the logic board.

Step 5

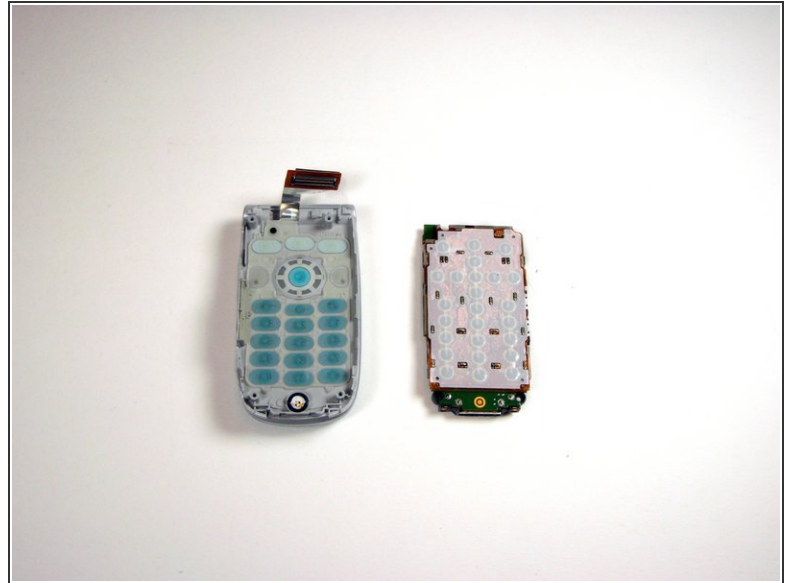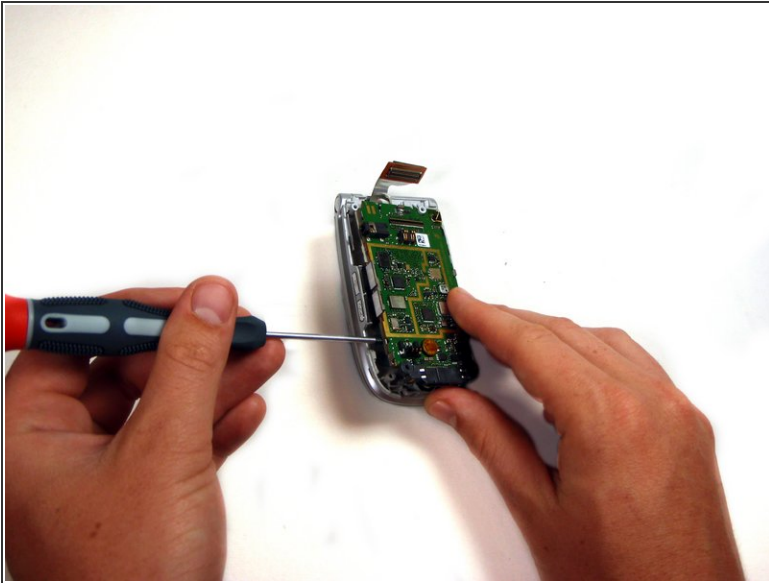

- Use the flathead screwdriver to pry the logic board and keypad from the device.

Step 6

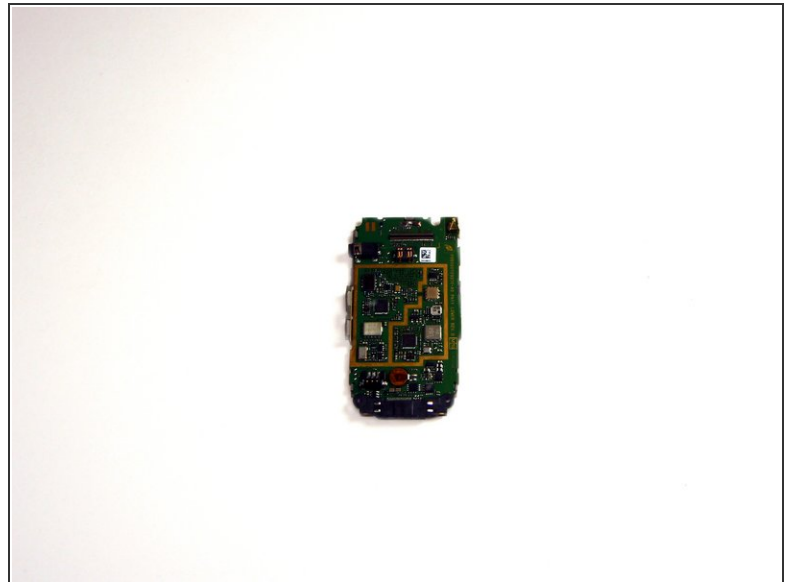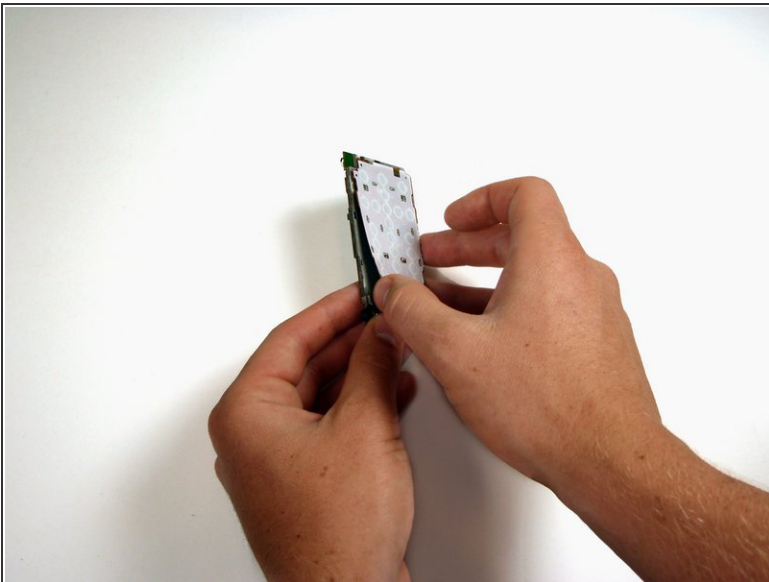

- Use your thumb to peel the keypad from the device.

To reassemble your device, follow these instructions in reverse order.

