




Asus ZenBook UX303U Back Panel Replacement

Replace the back panel if it is dented, scratched, or cracked.

Written By: Luis Perez

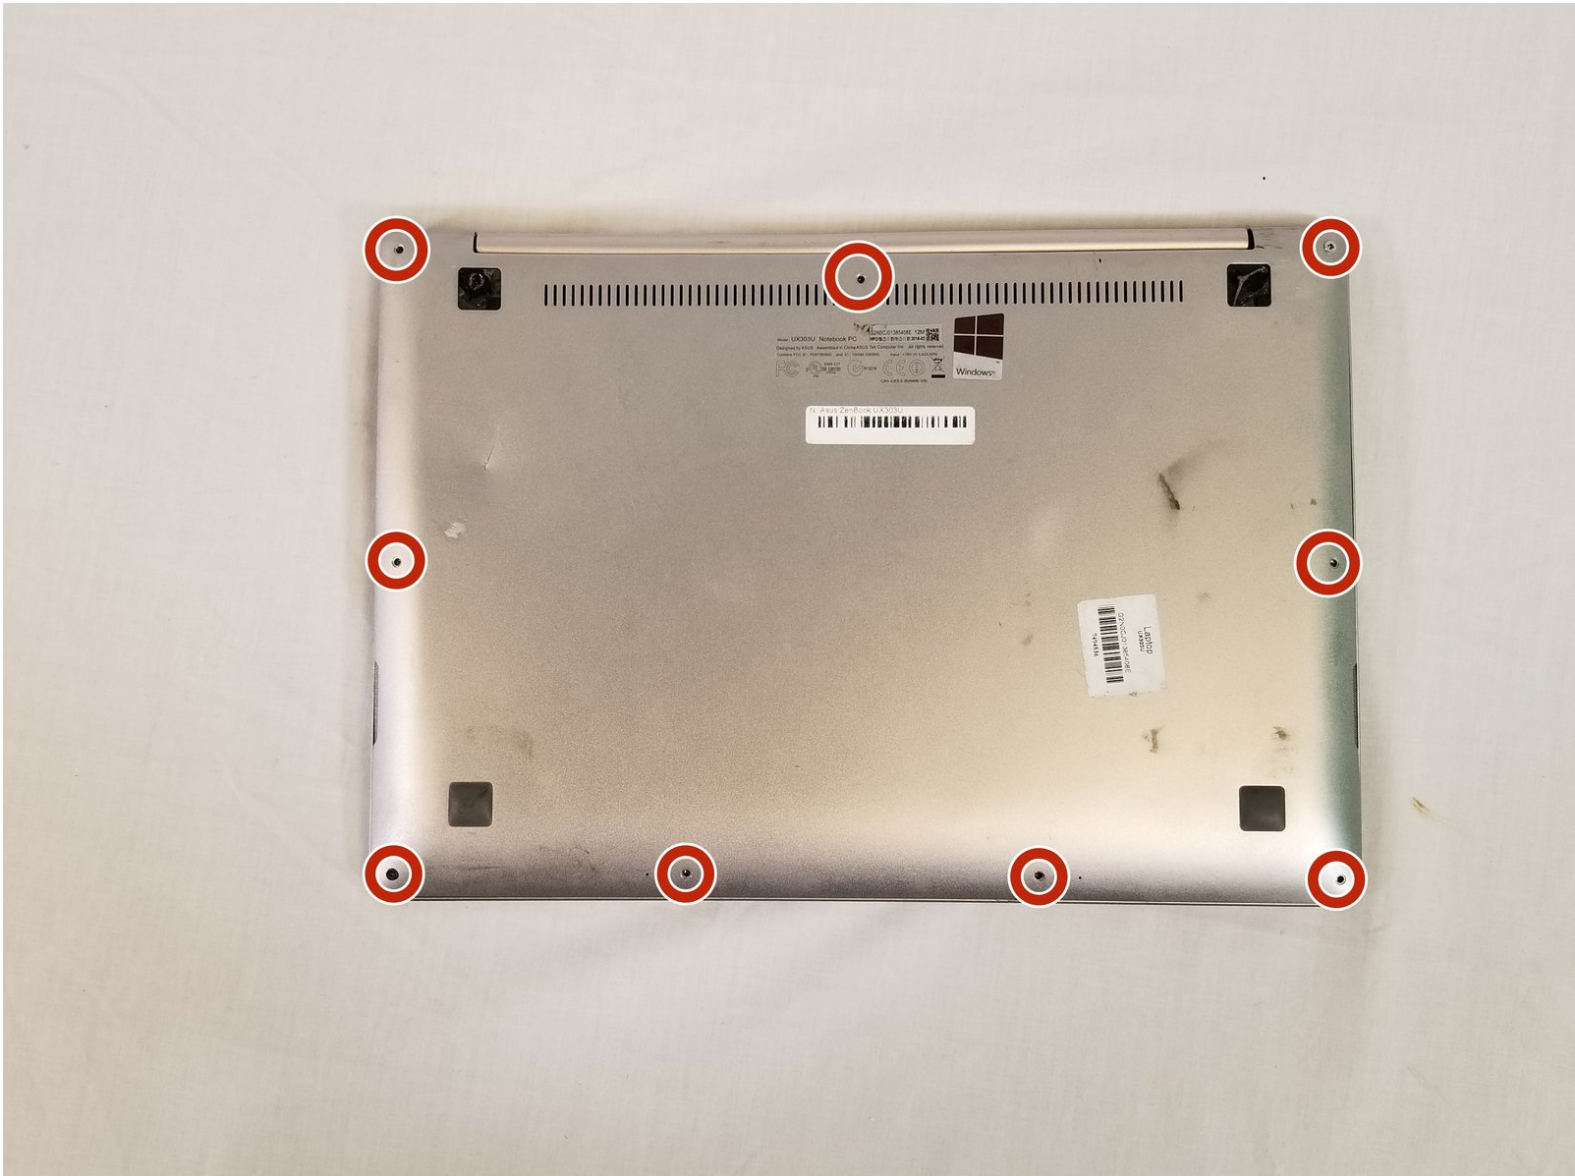


INTRODUCTION

This guide will show you how to replace a dented or damaged bottom panel on an Asus ZenBook UX303U laptop.

TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back Panel

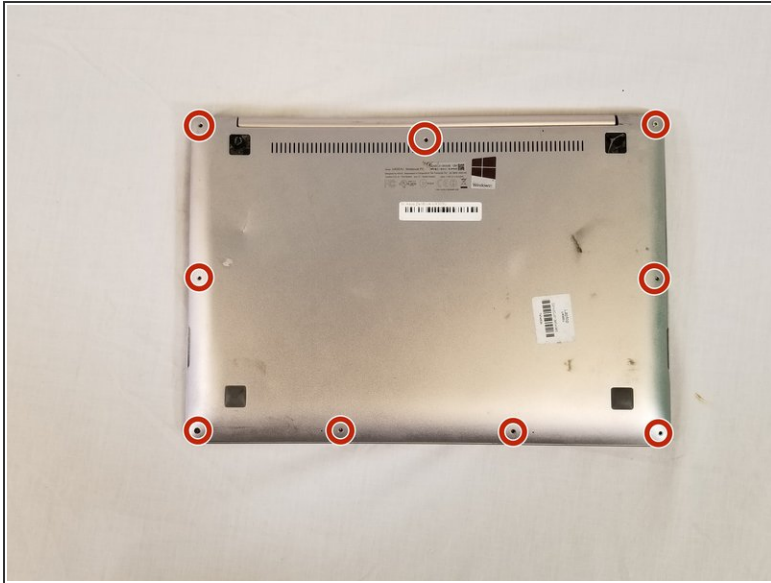

- Flip your laptop over so that the bottom is facing you.
- Remove the nine 4mm Phillips #00 screws from the back panel.
- Remove the two black rubber pads at the rear corners of the laptop near the screen hinge. They are attached with adhesive and can be pried off with a plastic removal tool or flat head screwdriver.
- Remove the two screws from where the rubber pads were attached.

Step 2

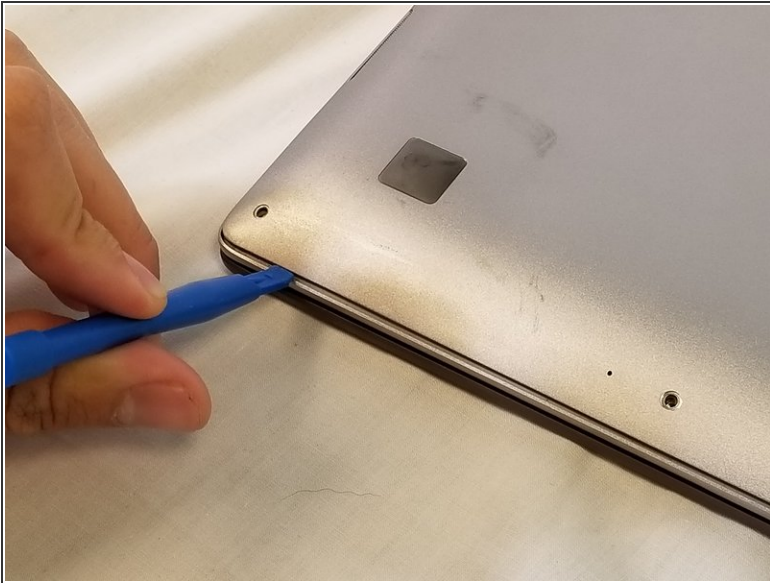

- Insert the ifixit opening tool between back panel and the frame.
- Lift to remove the back panel.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-01-15 05:12:19 AM.