



Dell Vostro 3350 Hard Drive Replacement


Written By: Johnathan Hammond



 **TOOLS:**


- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Unlocking the Battery

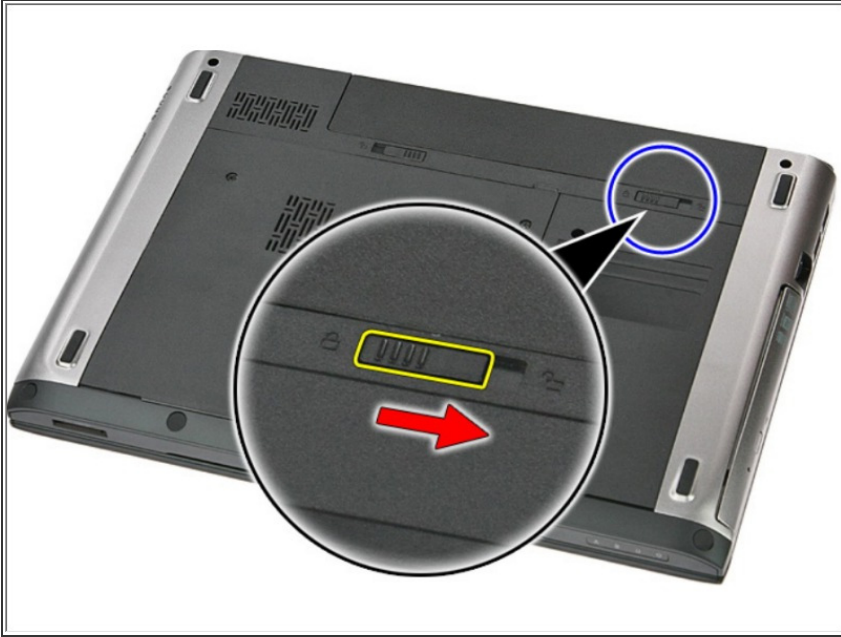

- Slide the release latches to unlock the battery.

Step 2 — Removing the Battery

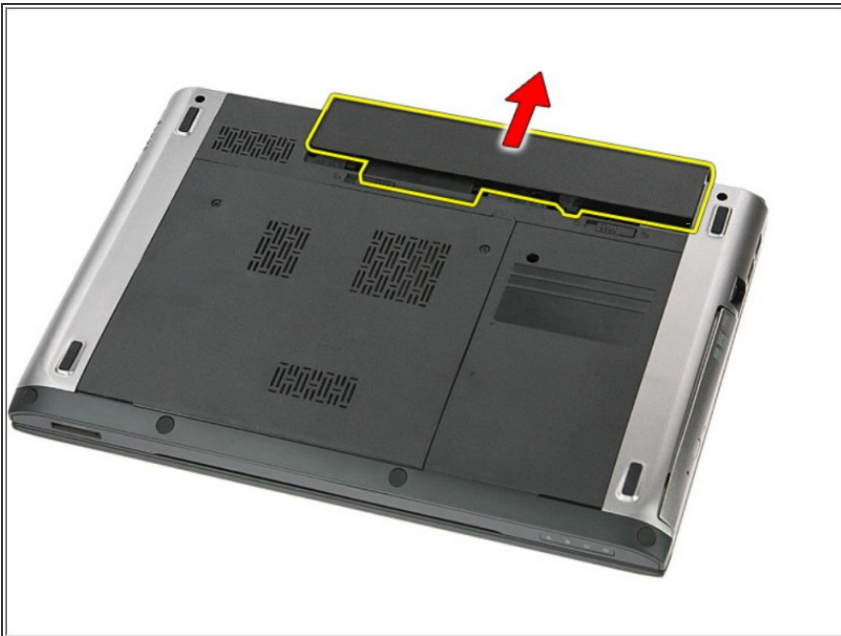


- Slide the battery and remove it from the computer.

Step 3 — Remove the Screws



- Remove the screws that secures the access panel to the base of the computer.

Step 4 — Lifting the Access Panel

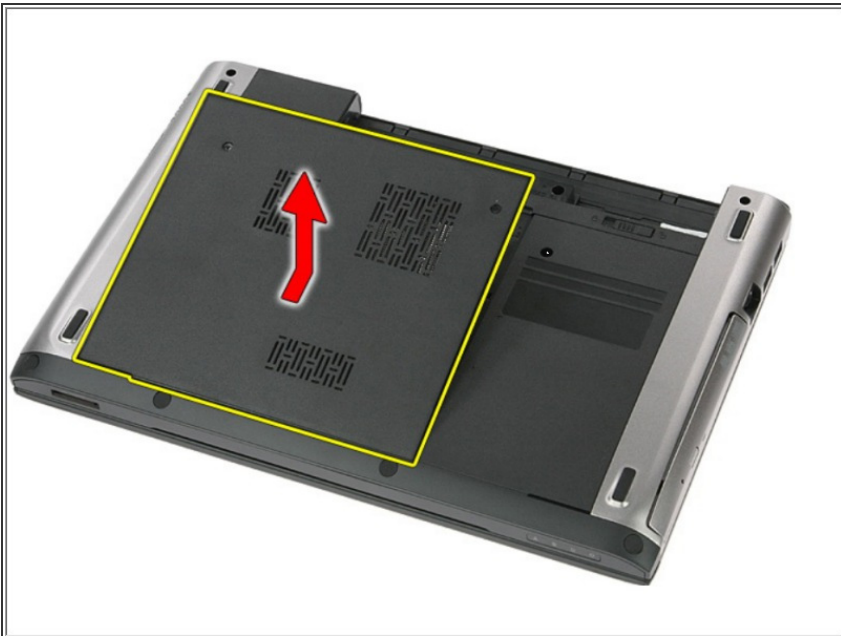

- Lift the access panel up at an angle and remove it from the computer.

Step 5 — Hard Drive



- Open the clip that secures the hard-drive assembly to the computer.

Step 6



- Disconnect the hard-drive cable from the hard drive.

Step 7




- Remove the screws that secure the hard-drive assembly to the computer.

Step 8



- Lift the hard drive up at an angle from the system and remove it from the computer.

Step 9

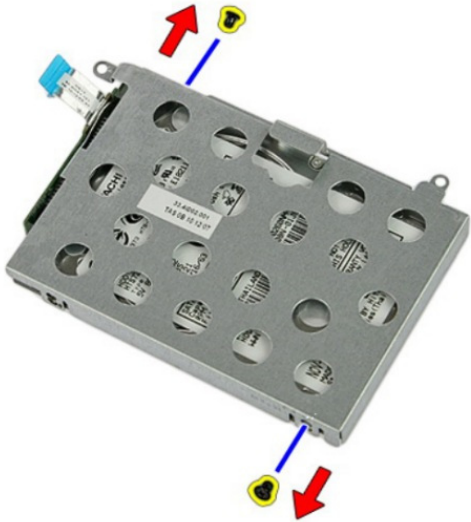

- Remove the screws that secure the hard-drive bracket to the hard drive.

Step 10



- Lift the hard-drive bracket up and away from the hard drive.

Step 11



- Remove the hard drive board from the hard drive.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-06-23 03:24:29 AM.