



MacBook Pro 15" Unibody Early 2011 Feet Replacement

Replace the feet on the early 2011 MacBook Pro 15".

Written By: Arthur Shi



INTRODUCTION

Replace the feet for the early 2011 MacBook Pro 15".



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Isopropyl Alcohol Wipes](#) (1)
- [Adhesive Remover Kit](#) (1)



PARTS:

- [MacBook and MacBook Pro Unibody Plastic Feet](#) (1)

Step 1 — Lower Case




- Remove the following ten screws securing the lower case to the upper case:
 - Three 13.5 mm (14.1 mm) Phillips screws.
 - Seven 3 mm Phillips screws.
- ☑ When removing these screws, note how they come out at a slight angle. They must be reinstalled the same way.

Step 2



- Using both hands, lift the lower case near the vent to pop it off two clips securing it to the upper case.
- Remove the lower case and set it aside.

Step 3 — Feet

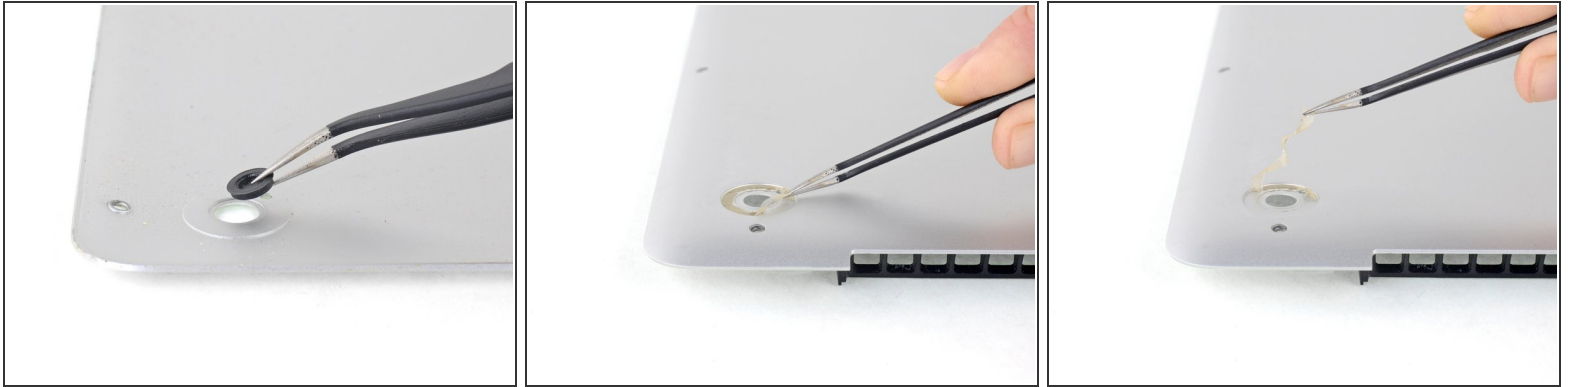

- Remove any broken or damaged feet.
- Remove any pieces from the old foot that may have broken off in the foot hole.
- Use tweezers to peel up and remove the old adhesive tape from the foot pad.

Step 4




- Scrub the foot pad with adhesive remover to remove any remaining adhesive.

Step 5



- Wipe the foot pad with an alcohol prep pad to remove any residue left by the cleaner.

Step 6

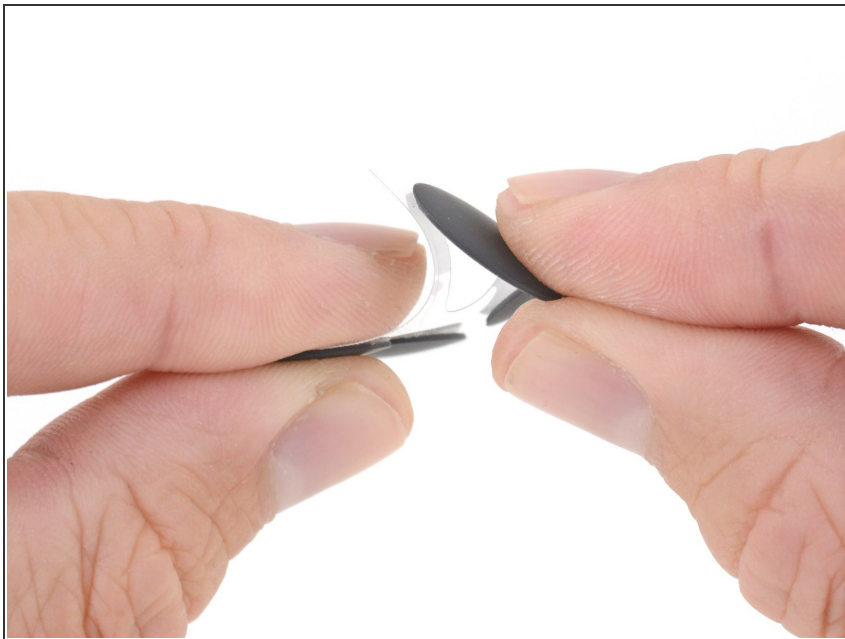

- Peel a replacement foot from the plastic backing.

Step 7



- Align the new foot inside the foot pad.
- Make sure the alignment nub on the foot is lined up with the small hole near the perimeter of the pad.
- Lay the foot down while keeping it properly aligned.
- Check for proper alignment from the inside of the lower case. Use tweezers to slide the alignment nub so it lines up with the hole.

Step 8



- Press the new foot down firmly with your finger and maintain pressure for 30 seconds to set the pressure sensitive adhesive.
- Repeat the last six steps for any broken or damaged feet.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-10 05:21:51 PM.