




PowerBook G3 Lombard PRAM Battery Replacement

Written By: iRobot

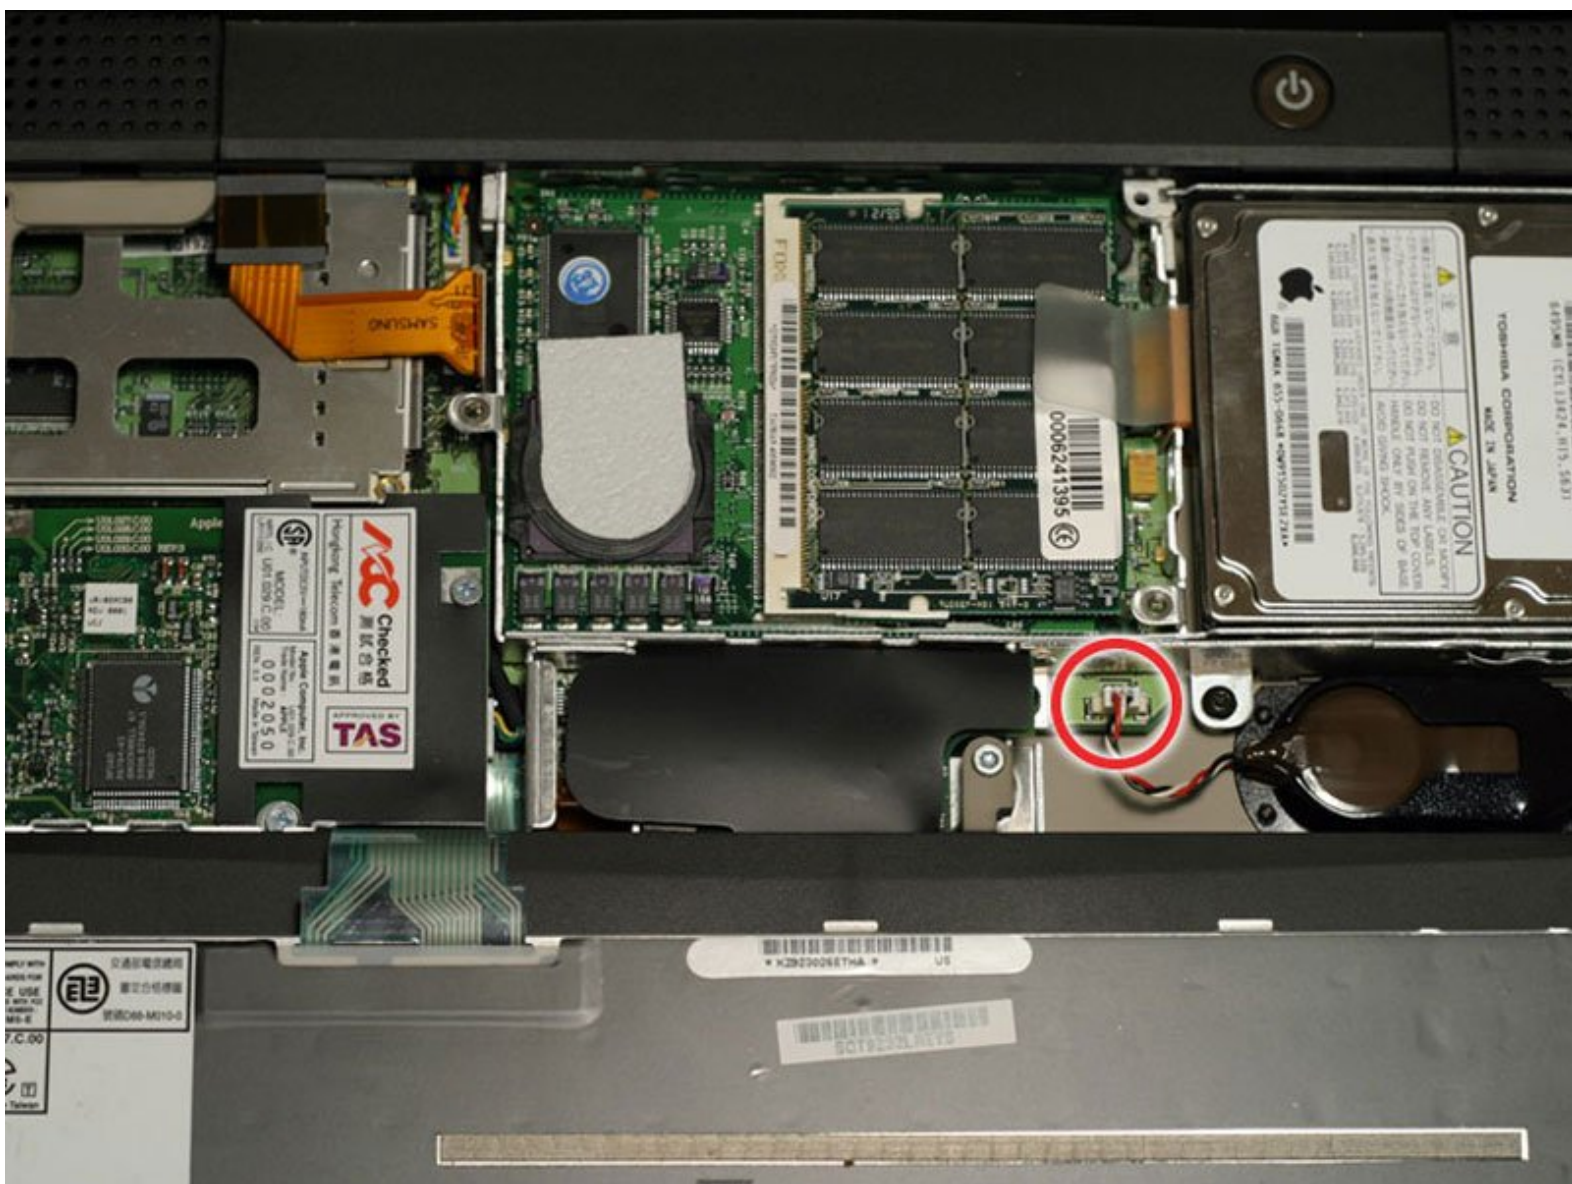

INTRODUCTION

The time and date, as well as other settings, are kept by the PRAM battery when your machine is off.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)

PARTS:


- [G3 Lombard or Pismo PRAM Battery \(New\)](#) (1)

Step 1 — Keyboard



- Turn the computer so that the ports are facing you.
- If the keyboard is locked, open the port cover and turn the keyboard locking screw until the keyboard is unlocked.

Step 2

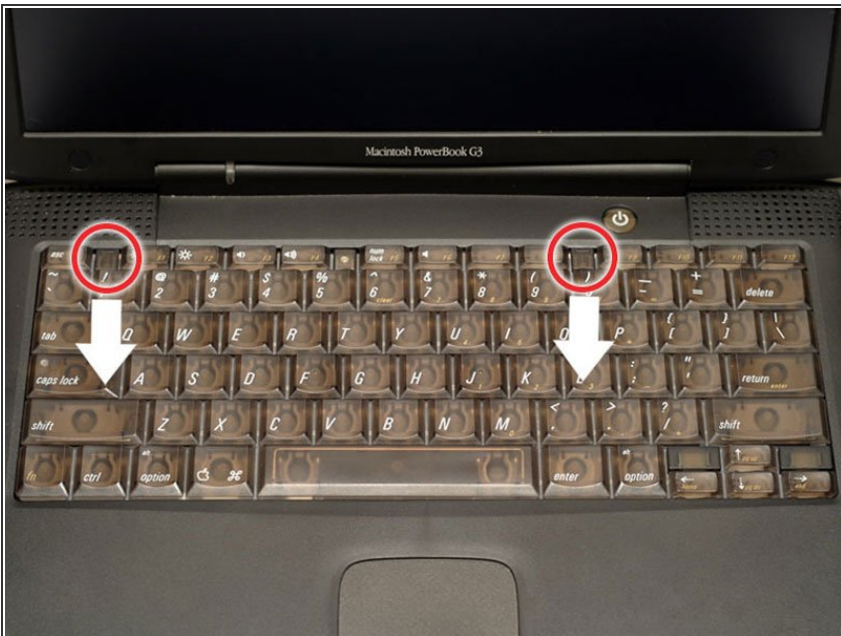

- Pull the keyboard release tabs toward you and lift up on the keyboard until it pops free.
- ⓘ Make sure you have removed the laptop battery and CD/DVD module from the expansion bays before proceeding.

Step 3




- Lift the keyboard out by pulling it up and away from you. Rest the keyboard, face down, on top of the trackpad.
- ⓘ In order to replace the keyboard, you must first remove the modem.

Step 4 — PRAM Battery



- Pull the battery cable directly up from the logic board.

Step 5

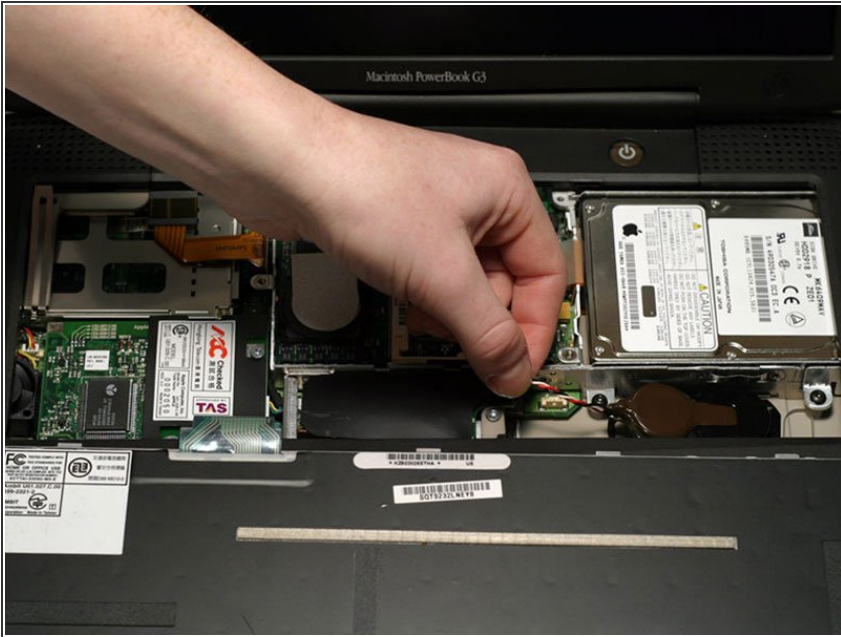

- Remove the battery from its holder by pulling up and to the left.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-01-14 08:41:31 PM.