



Dell Alienware M18x R2 Hard Drive Replacement

Written By: Terrence15




INTRODUCTION

In this guide, we will show you how to remove and replace the Hard Drive.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Lifting the Connector Latch

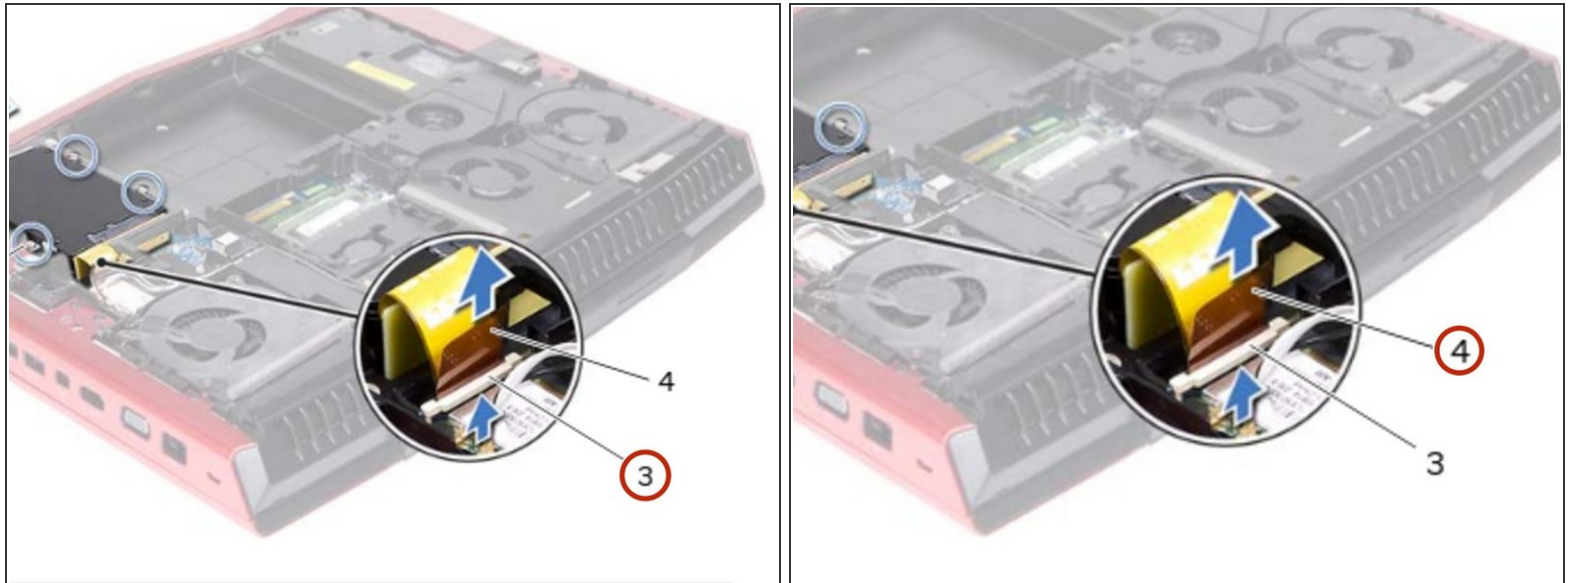


⚠ WARNING: Before working inside your computer, read the safety information that shipped with your computer and follow the steps in [Before You Begin](#).

⚠ CAUTION: Hard drives are extremely fragile. Exercise care when handling the hard drive


- Lift the connector latch that secures the hard-drive cable to the connector on the system board, and then disconnect the hard-drive cable from the connector on the system board.

Step 2 — Lifting the Hard-Drive Assembly

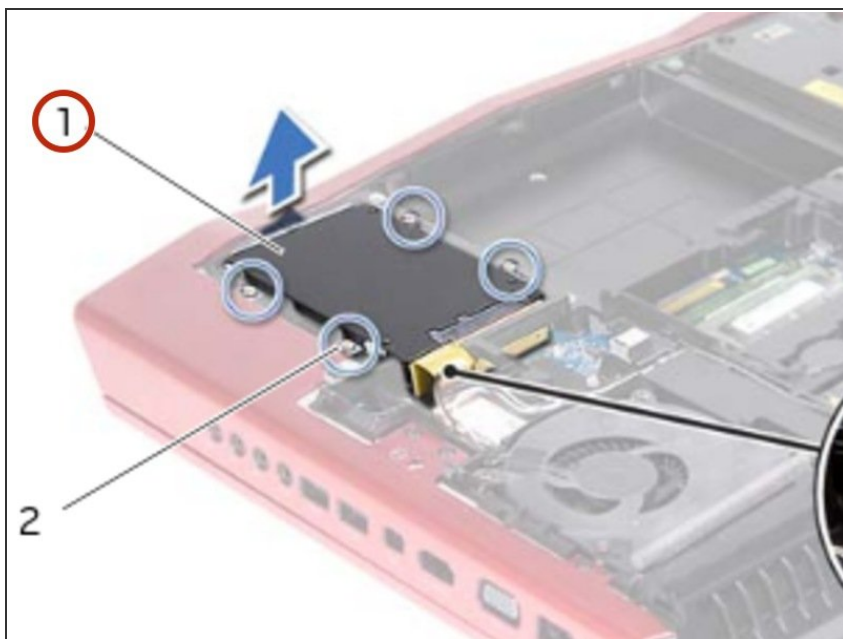


- Using the pull-tab, lift the hard-drive assembly out of the computer base.

Step 3 — Disconnecting the Interposer

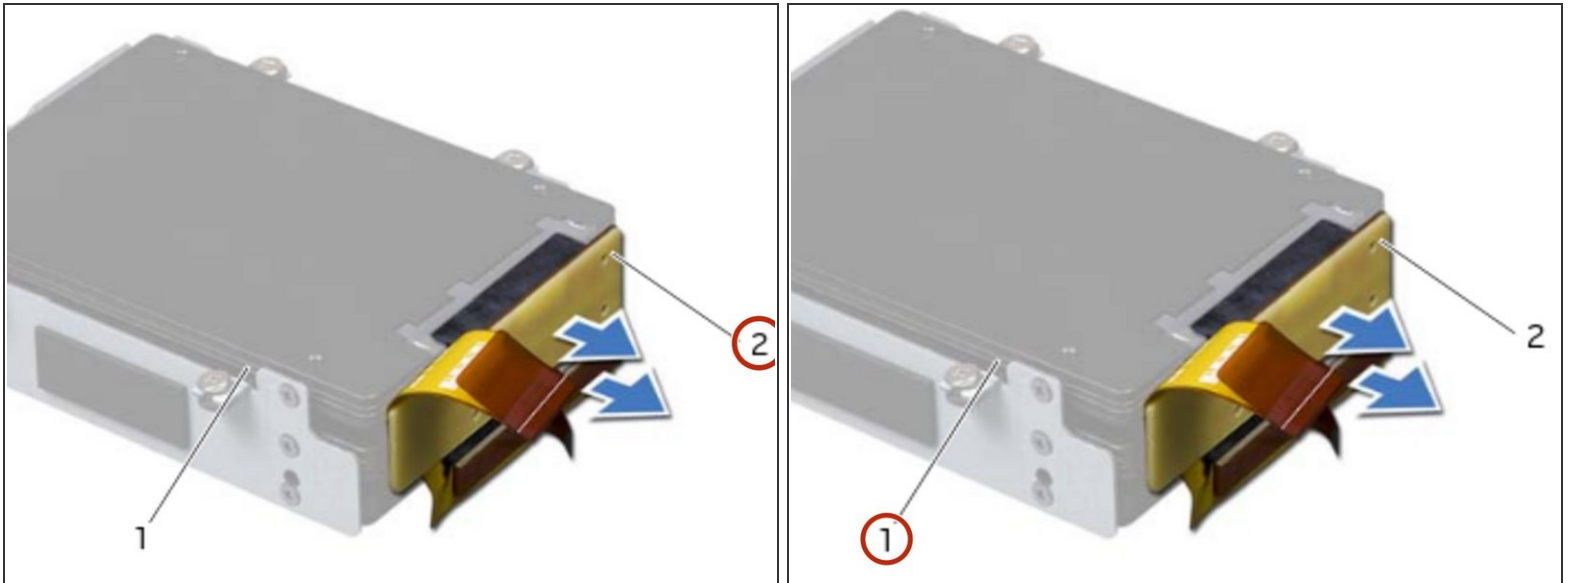


- Disconnect the interposer from the hard drives.

Step 4 — Remove the Screws

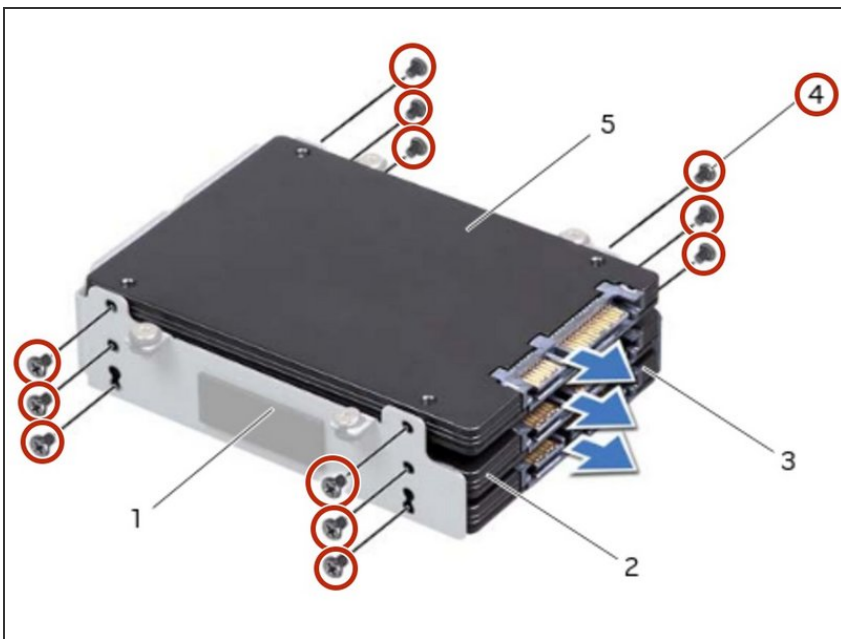


- Remove the screws that secure the hard drive(s) and slide the hard drive(s) out of the hard-drive bracket.

Step 5 — Placing the Hard Drive

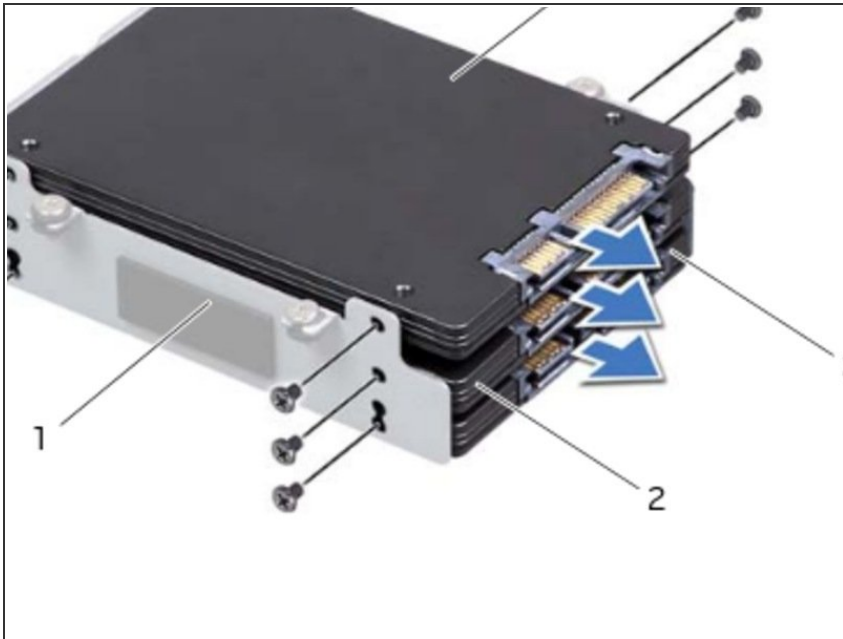


- Place the **NEW** primary hard drive (HDD 0) in the hard-drive bracket.

Step 6 — Sliding the Hard Drives

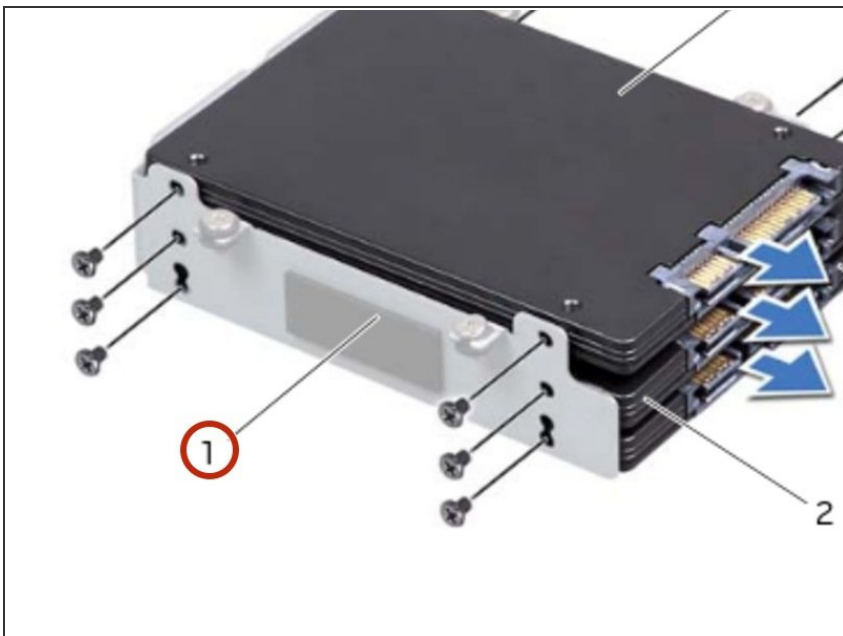


- If applicable, slide the secondary and tertiary hard drive(s) into the hard-drive bracket.

Step 7 — Replace the Screws

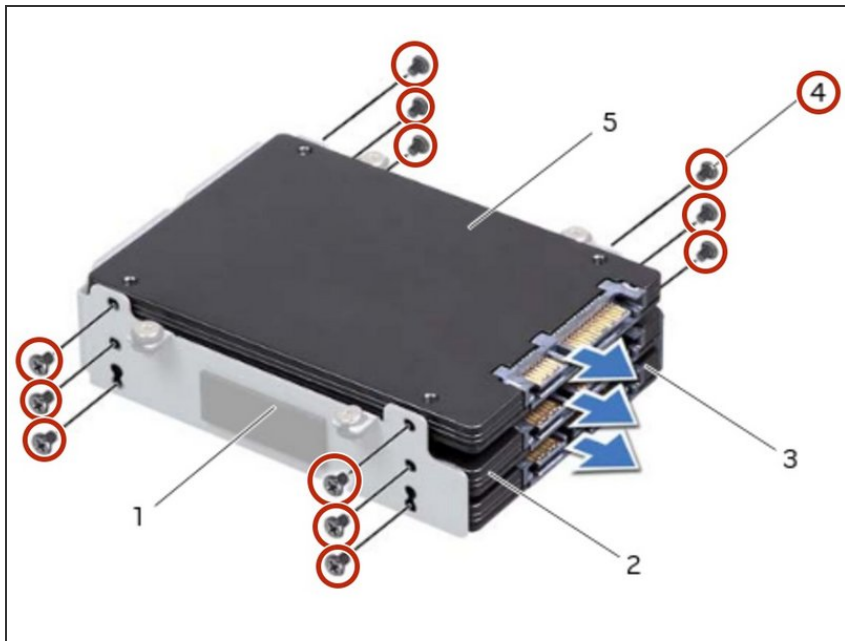


- Replace the screws that secure the primary hard drive (HDD 0).

Step 8 — Connecting the Interposer

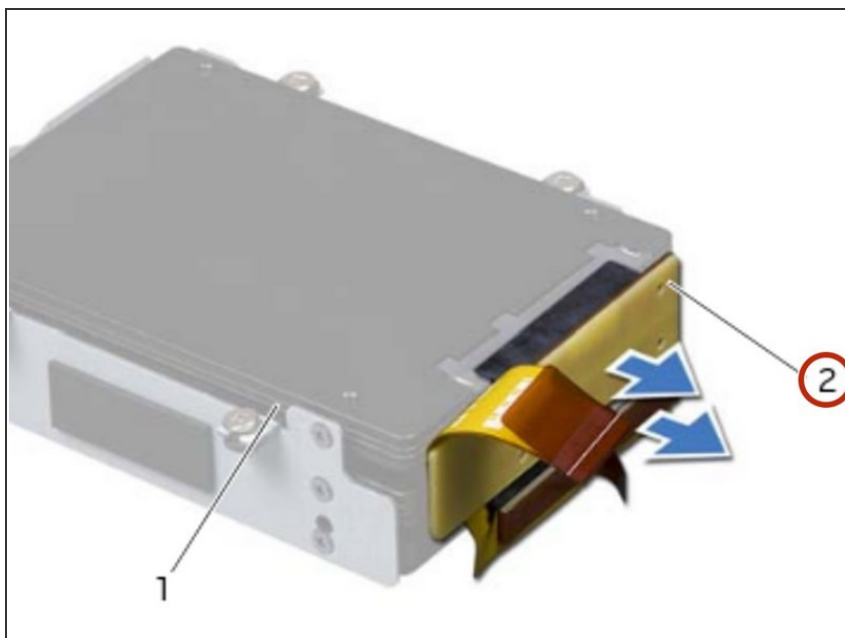


- If applicable, replace the screws that secure the secondary hard drive (HDD 1) and tertiary hard drive (HDD 2) to the hard-drive bracket.
- Connect the interposer to the hard drive(s).

Step 9 — Placing the Hard-Drive Assembly

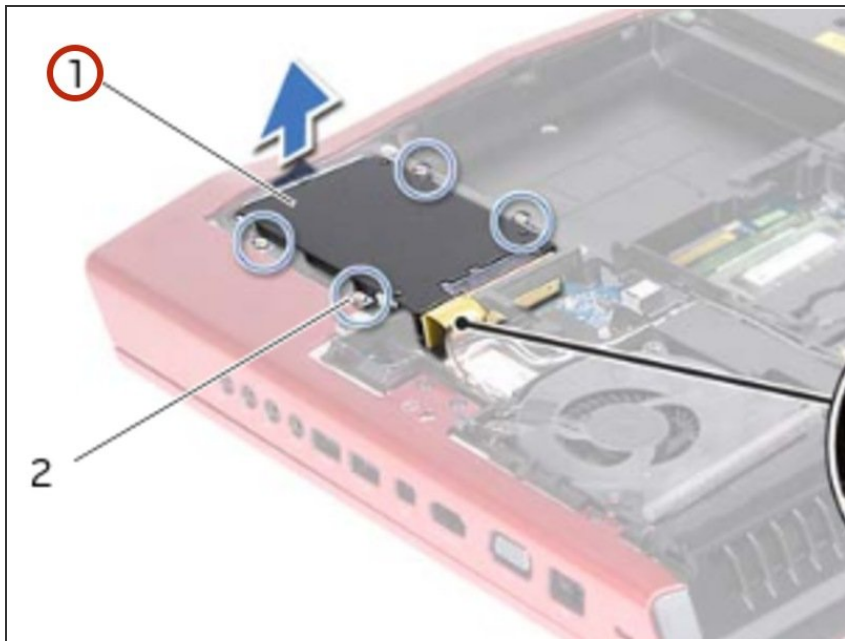


- Place the hard-drive assembly in the computer base.

Step 10 — Tighten the Captive Screws

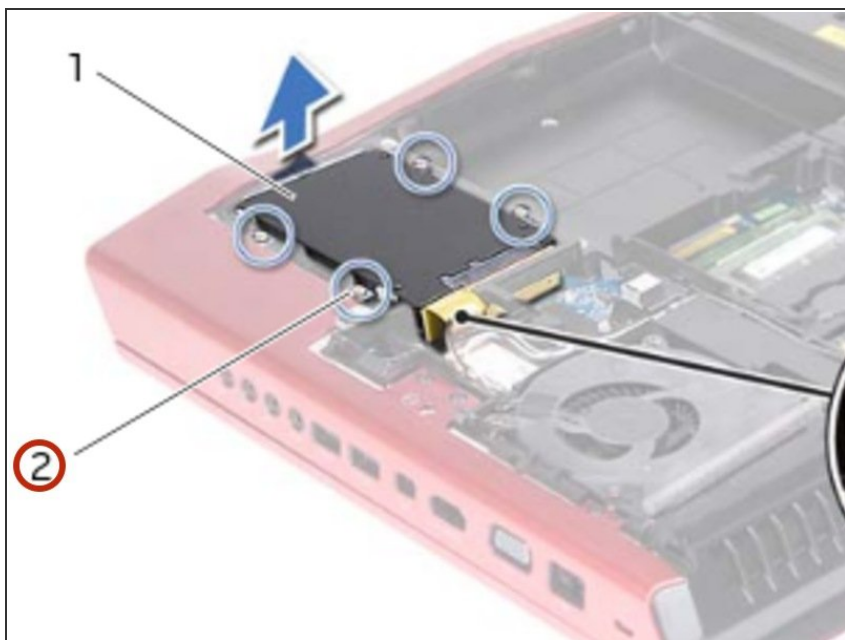

- Tighten the captive screws that secure the hard-drive assembly to the computer base.

Step 11 — Sliding the Hard-Drive Cable

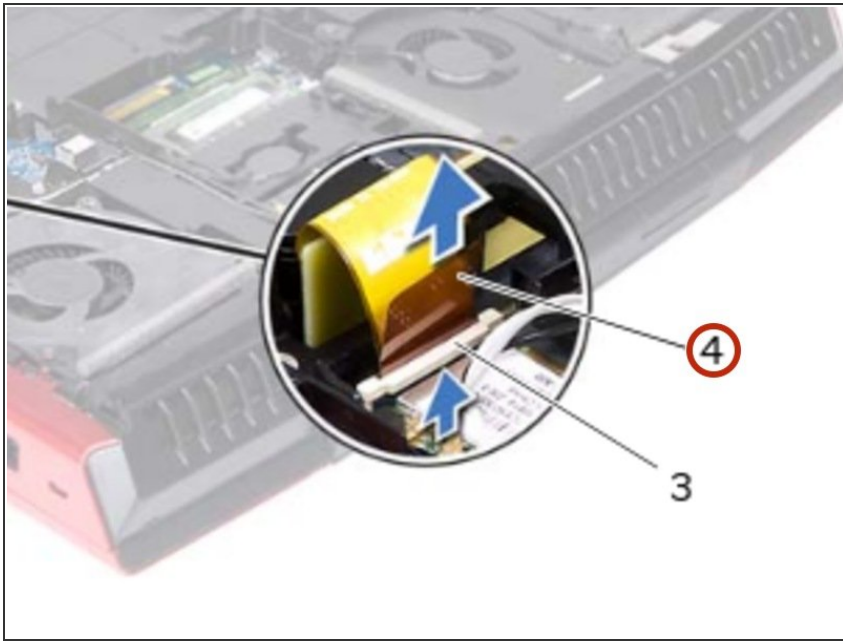

- Slide the hard-drive cable into the connector on the system board and press down on the connector latch to secure the cable.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-16 05:49:27 PM.