



Dell Vostro 15 3568 KeyBoard Replacement


Written By: Johnathan Hammond



 **TOOLS:**

- [Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery

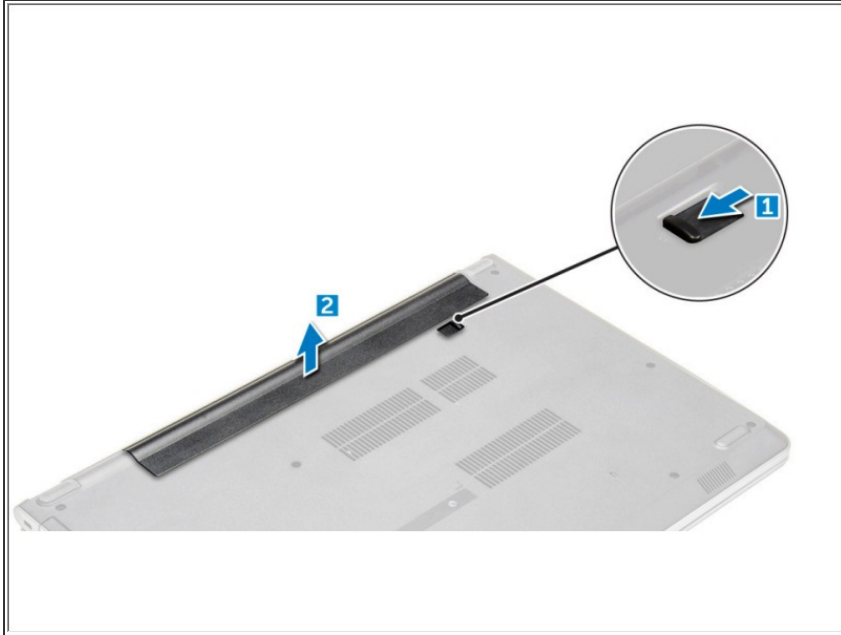

- Slide the release latch to release the battery [1].
- Remove the battery from the computer [2].

Step 2 — Keyboard



- Release the keyboard by prying on the keyboard release tabs using a plastic scribe [1].
- Slide and lift the keyboard to access the keyboard connector cable under the keyboard [2].

Step 3



- Disconnect the keyboard cable from the system board.
- Lift the keyboard cable to remove it from the computer.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-05-10 02:54:28 PM.