



# Hyundai HB-20 Brake light Replacement

This guide shows how to replace faulty bulbs for the top brake light.

Written By: Jose Gustavo Abreu Murta



 **TOOLS:**

- 10mm Wrench (1)

## Step 1 — Brake light




- Remove three nuts.
- Use 10 mm wrench

## Step 2




- After nuts removed, press gently the screws.

### Step 3

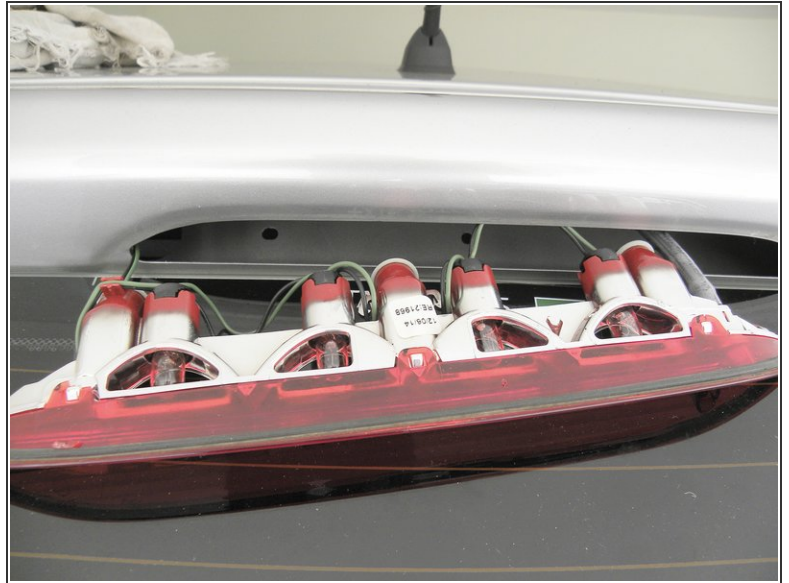

- Gently remove the light assembly.

### Step 4

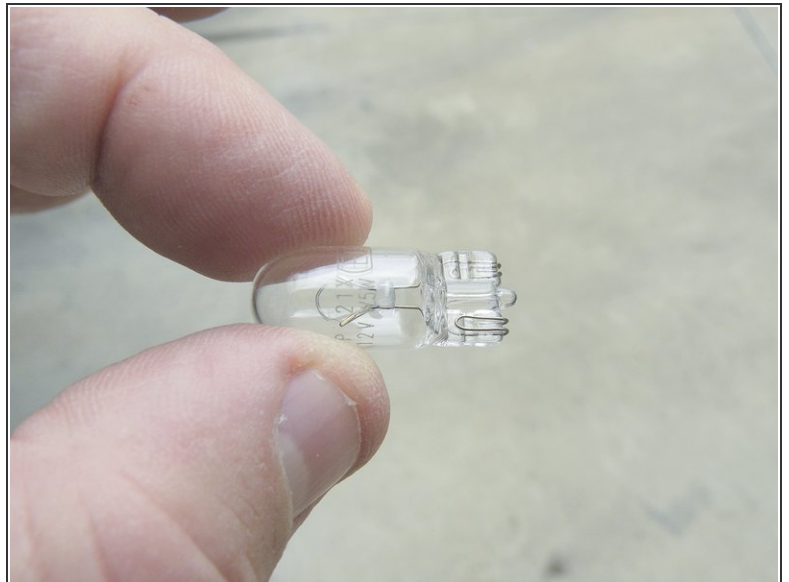

- Remove the lamp socket and change the burned-out bulb (12V 5W).

To reassemble your device, follow these instructions in reverse order.

