



Dell Vostro 1088 Hard Drive Replacement

Written By: Johnathan Hammond



 **TOOLS:**


- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery




- Slide the battery latches apart while at the same time slipping your forefingers into the groove at the center of the battery and pushing outward to disengage the battery from the computer.
- Lift the battery from the computer.

Step 2 — Access Panel

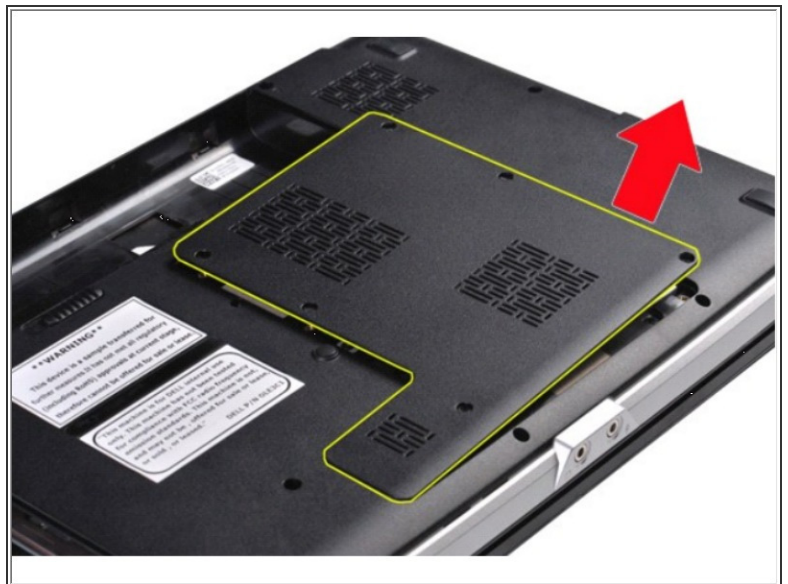

- Remove the six screws that secure the access panel to the computer.
- Remove the access panel from the computer.

Step 3 — Hard Drive

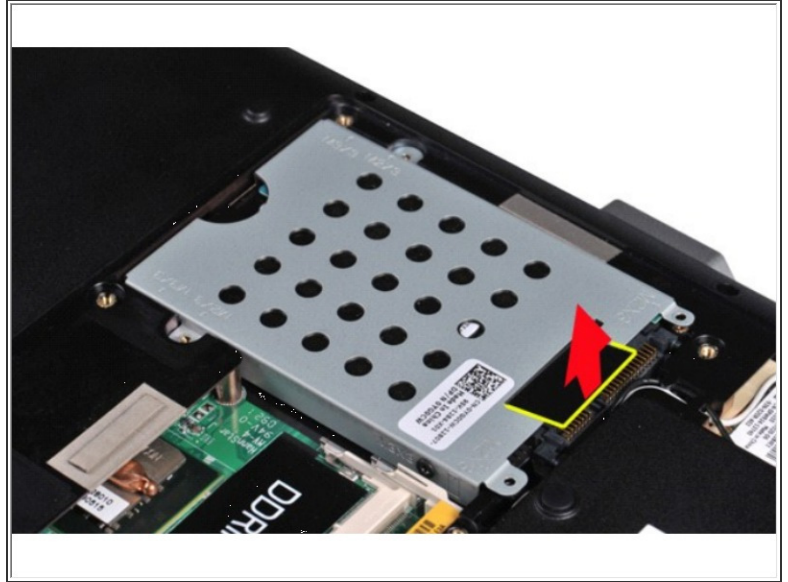

- Remove the four screws that secure the hard drive assembly to the computer.
- Pull the plastic tab toward the opposite end of the hard drive assembly to disengage the hard drive interposer from the connector on the system board, then lift the hard drive assembly from the computer.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-06-23 03:30:31 AM.