



# Kindle Paperwhite 1st Generation Battery Replacement

This guide will tell you how to install a new battery for your Kindle Paperwhite 1st Generation.

Written By: Isabelle Burgess



## INTRODUCTION

Having charging problems? It could be time for a new battery. Use this guide to replace the battery in your Kindle Paperwhite 1st Generation.


### TOOLS:

- [Phillips #2 Screwdriver](#) (1)
- [Spudger](#) (1)

### PARTS:

- [amazonkindle MC-354775-03 5.25Wh Lithium Polymer Battery](#) (1)

## Step 1 — Case

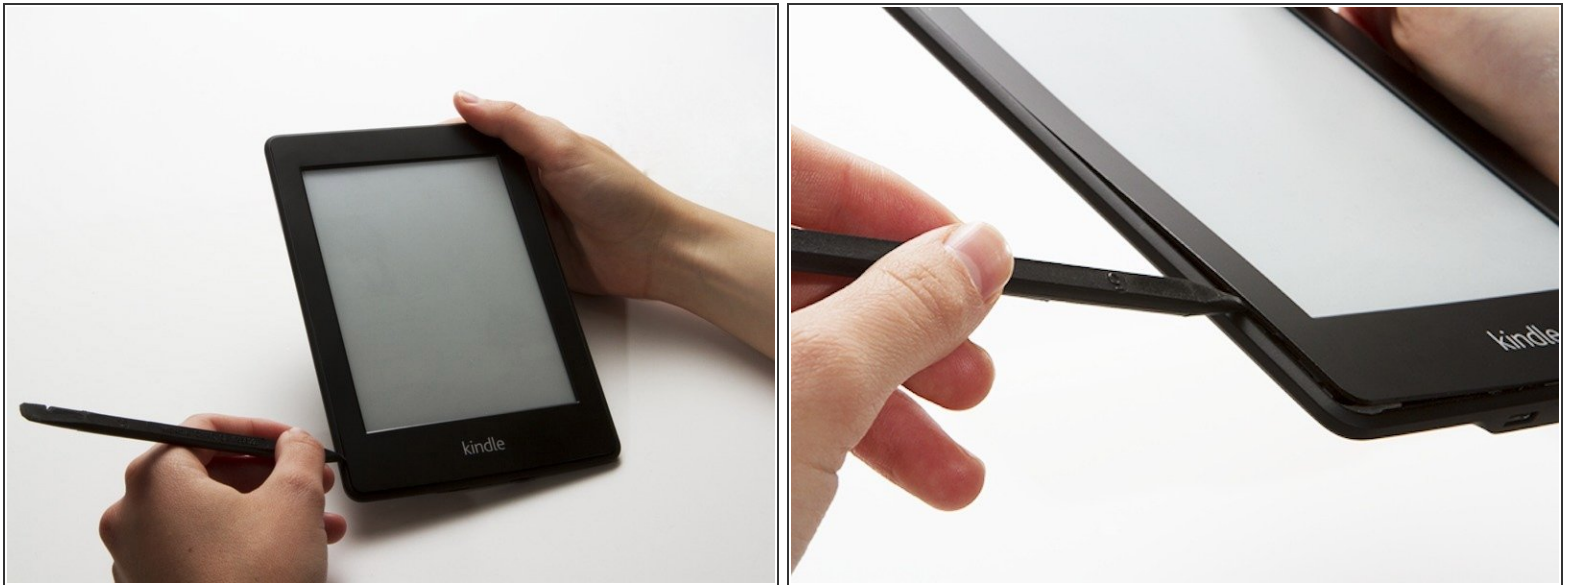

- Using a spudger or plastic opening tool, gently pry the bezel from the screen. It is easier to start in the corners and work your way around the bezel.

⚠ Do not insert the spudger too far under the bezel; it could easily damage the screen.

## Step 2



- Remove the eleven 3.0 mm Phillips screws surrounding the midframe.

ⓘ At the top of the display, a strip of black tape covers one screw.

## Step 3



- Lift the midframe out of the case.
- ⓘ If the midframe is stuck, slide it to the left first, and then lift it out.

## Step 4 — Battery



- Turn over the midframe to locate the battery.
- Remove the three Phillips 3.0 mm screws securing the battery to the midframe.

## Step 5



- Gently lift the battery from the bottom, and slide it out of the midframe.

To reassemble your device, follow these instructions in reverse order.