




HP 15-R263DX Keyboard Replacement

This guide is a step by step tutorial on how to replace the entire keyboard in the HP 15 laptop.


Written By: Dilan Johnson

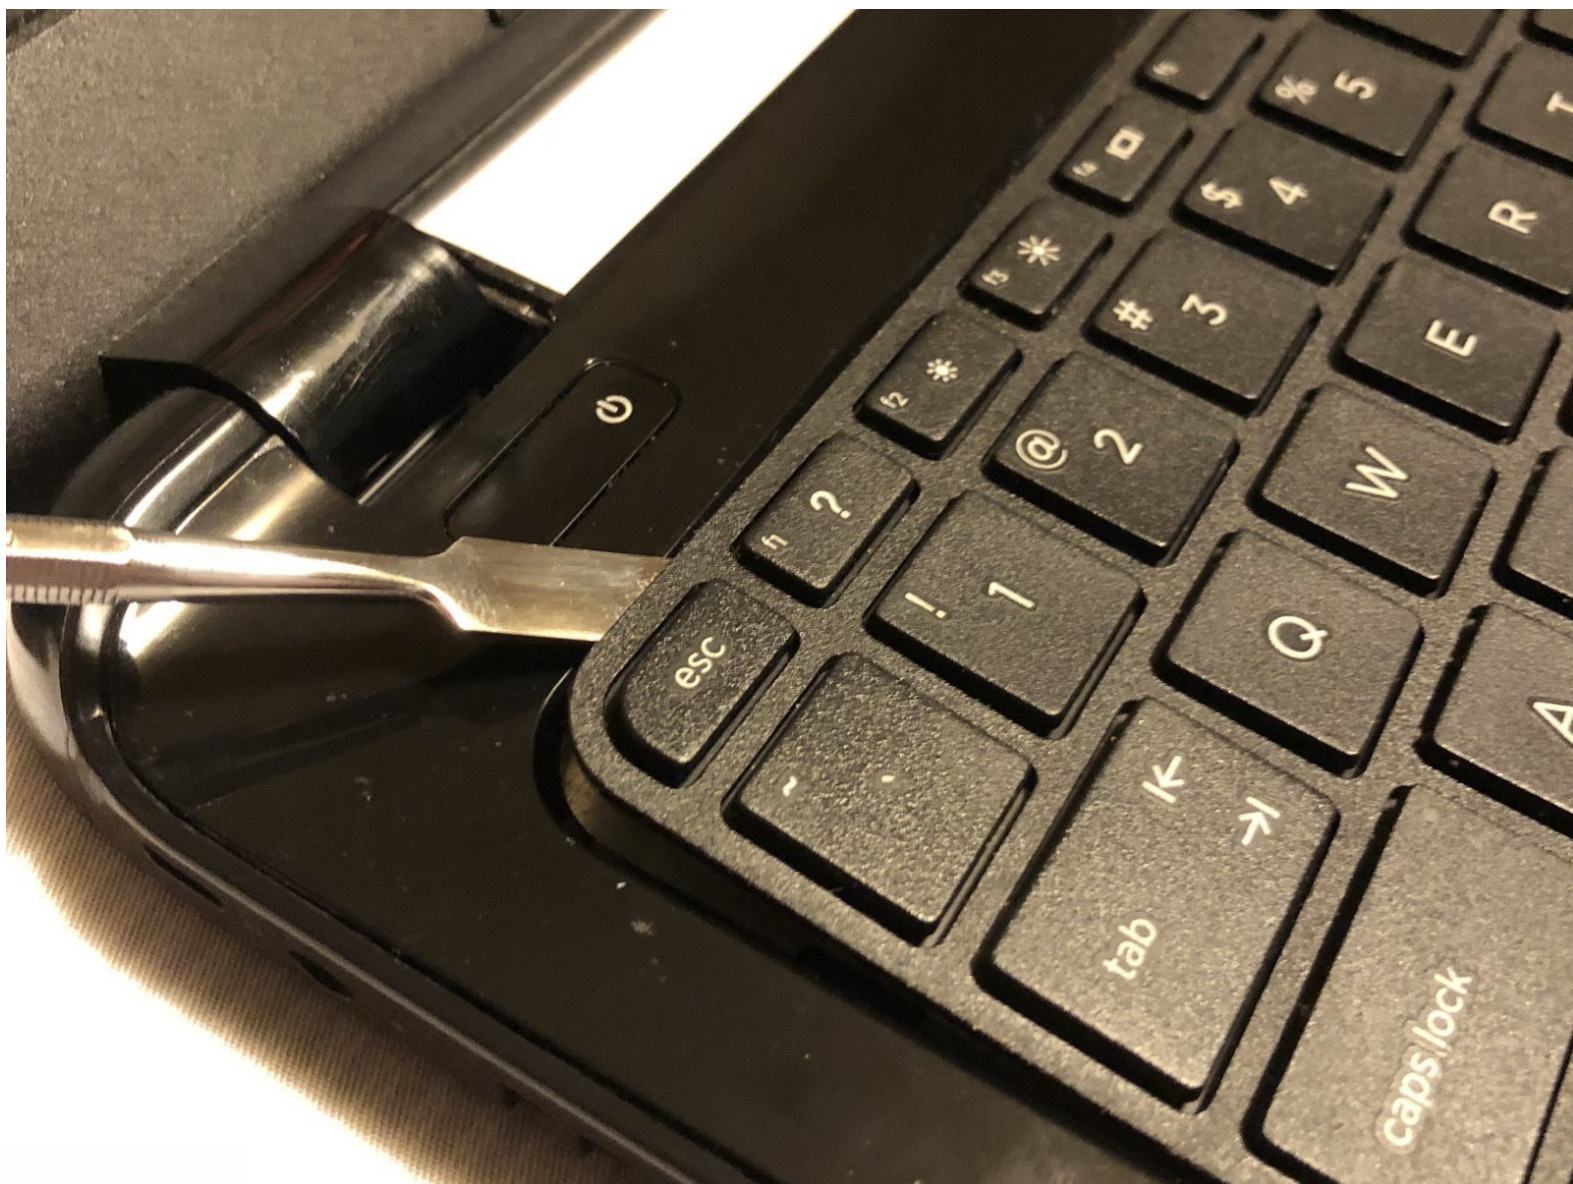

 **TOOLS:**


- [Metal Spudger](#) (1)
-

Step 1 — Battery

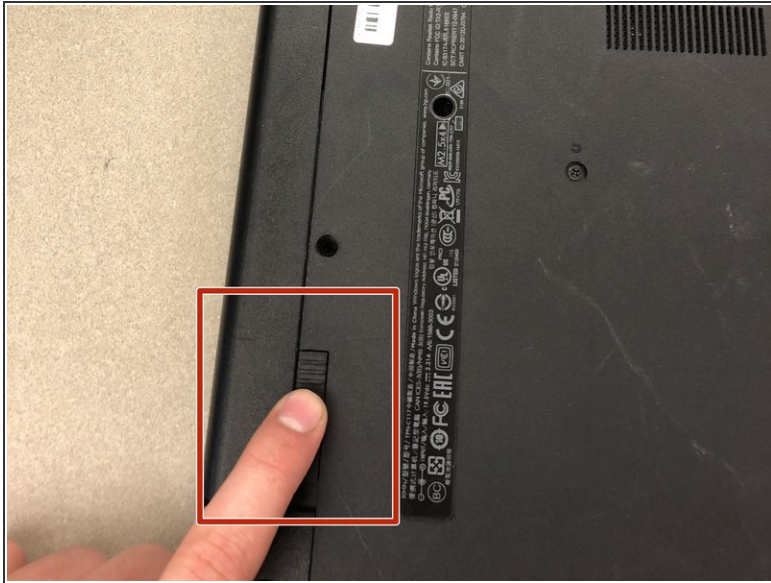

- Eject the battery from the computer by sliding the two clips on the bottom of the computer toward the center of the computer.
- Slide the battery out as shown in the picture.

Step 2 — Keyboard

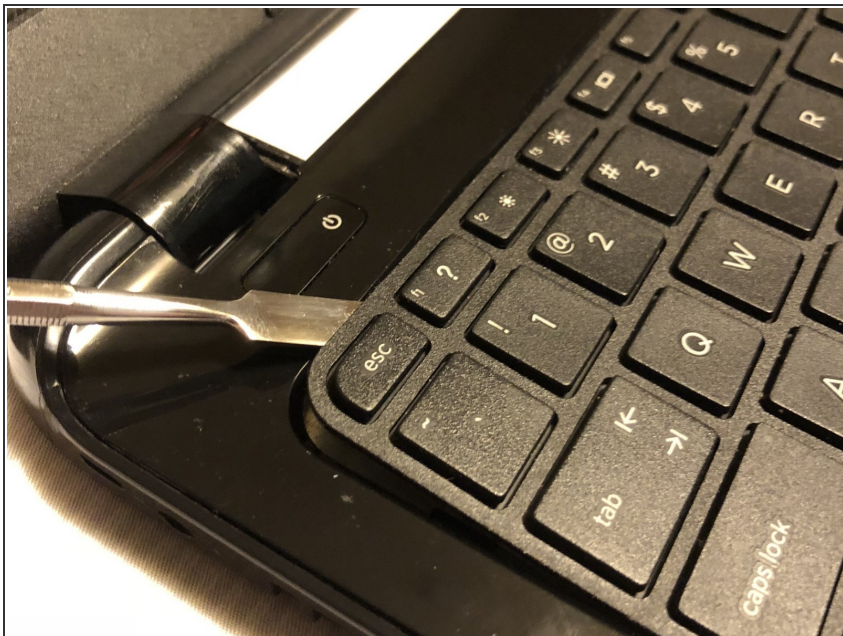

- ⚠ Once keyboard is loose, do not immediately remove it from the computer. It is attached by a ribbon connector.
- Using a metal wedge tool, pry up along the top edge of the keyboard until all clips are disengaged and the keyboard is loose from the computer.

Step 3



- To disconnect the ribbon connector, flip up the black clip shown in the picture.
- Gently pull the ribbon until disconnected.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-08-23 12:51:49 PM.