



# Kindle Paperwhite 3rd Generation Battery Replacement

Use this guide to replace your battery in case it is failing to charge or has unacceptably low battery life.

Written By: Micah Smart



This document was generated on 2020-11-14 04:36:22 AM (MST).

---

## INTRODUCTION

Amazon's Kindle Paperwhite 3rd Generation (7th Generation of Kindles) possesses a 3.7 Volt, Lithium Polymer battery (Model No: MC-354775-05). This guide requires that the Kindle is turned off, and that a plastic opening tool, and a PH000 screwdriver are used.



---

### TOOLS:


- [iFixit Opening Tools](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Battery



-  Ensure that the device is turned off before beginning.
- Gently pry the bezel off the screen using a plastic opening tool. Start at the corners and slide around the edges until you return to your starting point.
-  Be careful if using the metal spudger, as it can scratch the surface of the Kindle.

## Step 2

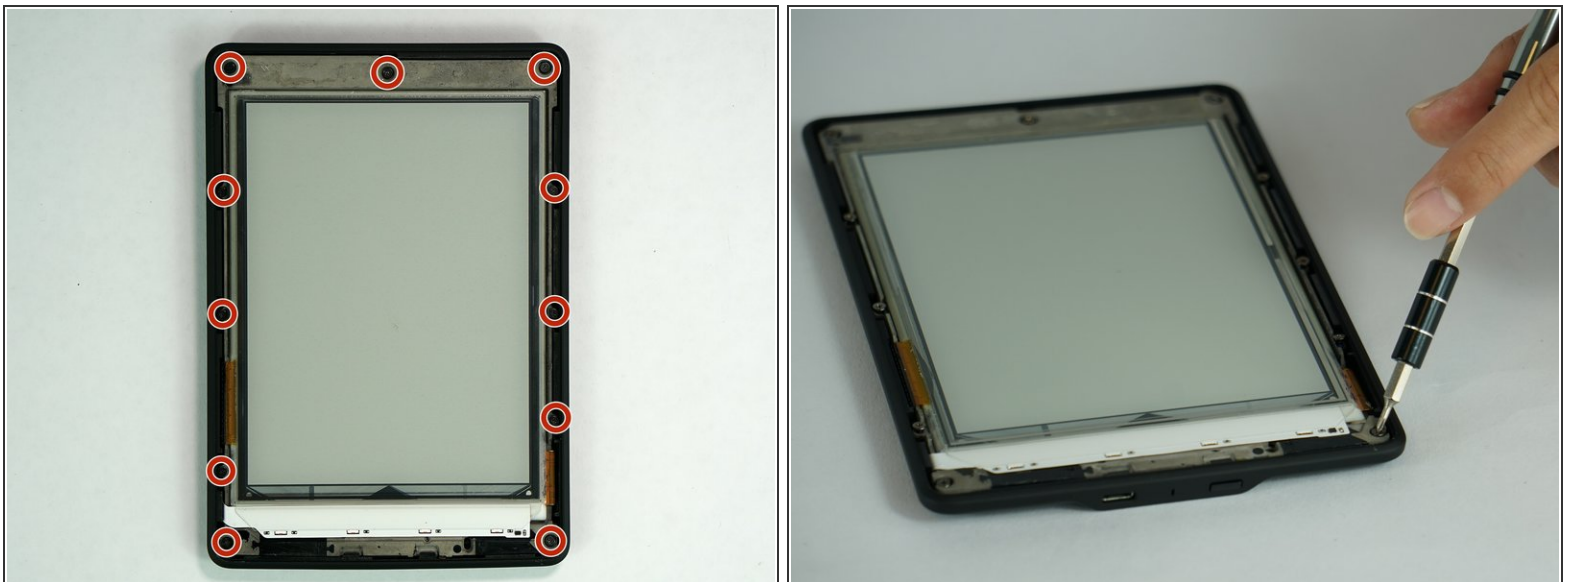

- Unscrew the eleven 3.2 mm Phillips #000 screws surrounding the frame.

### Step 3




- Gently lift the mid-frame out of the case with your hands.

### Step 4



- Unscrew the three 3.0 mm Phillips #000 screws that are securing the battery.

## Step 5

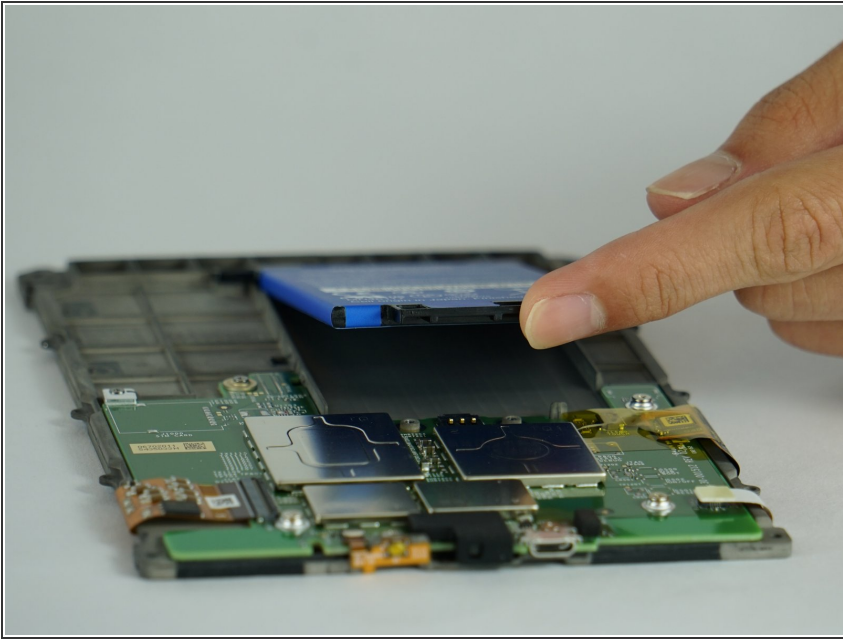

- Gently lift the battery from the frame.

To reassemble your device, follow these instructions in reverse order.