



# Asus ROG GL551J Optical Drive Replacement

An optical drive replacement guide for the Asus ROG GL551J

Written By: Philip Muino



---

## INTRODUCTION

An optical drive replacement guide for the Asus ROG GL551J.

---

### TOOLS:

- [Phillips #000 Screwdriver](#) (1)
-

## Step 1 — Battery



- Lay device on a flat surface with battery facing up.
- ⓘ Be sure to wear ESD or Rubber gloves to protect the computer components

## Step 2




- Push right on the latch found below the battery

### Step 3



- Battery should release upwards. Pull battery out.

### Step 4 — Optical Drive

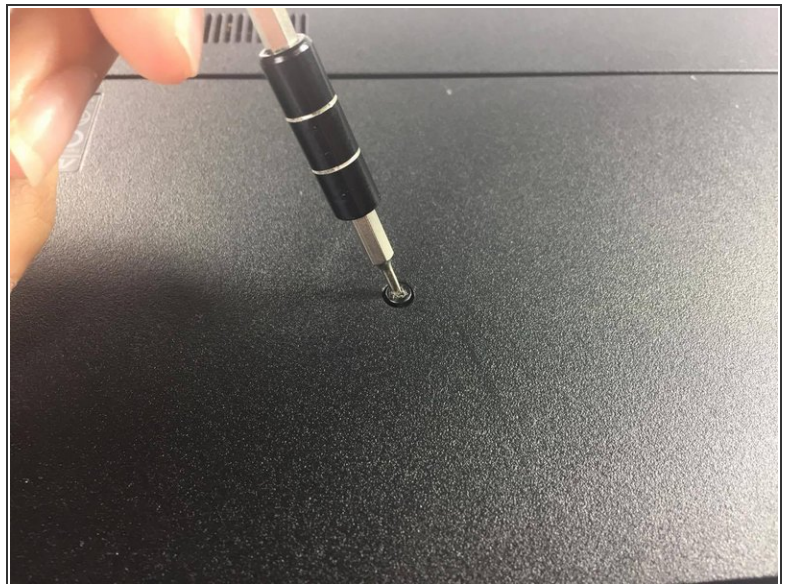

- Locate and unscrew the screw which connects the optical drive to the chassis

## Step 5



- Grasp the edge of the optical drive

## Step 6



- Pull on the optical drive gently. With little resistance, the optical drive should just slide out

To reassemble your device, follow these instructions in reverse order.