



Samsung Galaxy S7 Active Screen Replacement

How to replace a Samsung Galaxy S7 Active screen.

Written By: Erick Vazquez



INTRODUCTION

This guide will teach you how to pry open your screen through the front side of the phone.



TOOLS:

- [Metal Spudger](#) (1)
- [Tweezers](#) (1)
- [Heat Gun](#) (1)



PARTS:

- [Samsung Galaxy S7 Active Screen](#) (1)

Step 1 — Samsung Galaxy S7 Active Disassembly



- Melt the adhesive on the screen by applying a blow dryer directly on the screen.

⚠ Your phone is hot, please do not touch it with your bare hand.

Step 2



- Wedge the metal spudger in between the screen and the frame to begin separating them.

ⓘ It would be easier to separate the screen from the sealing adhesive on the frame if you with more than one metal spudger.

ⓘ Your phone might no longer be watertight after you reassemble it.

Step 3




- Slide the metal spudger around the phone at least once.
- ⓘ It would be easier to slide your metal spudger if you apply the blow dryer to where you are currently sliding.

Step 4




- Lift the screen up with your hands.
- ⚠ Please wash your hands thoroughly with hot water and soap after you finish.

Step 5 — Screen

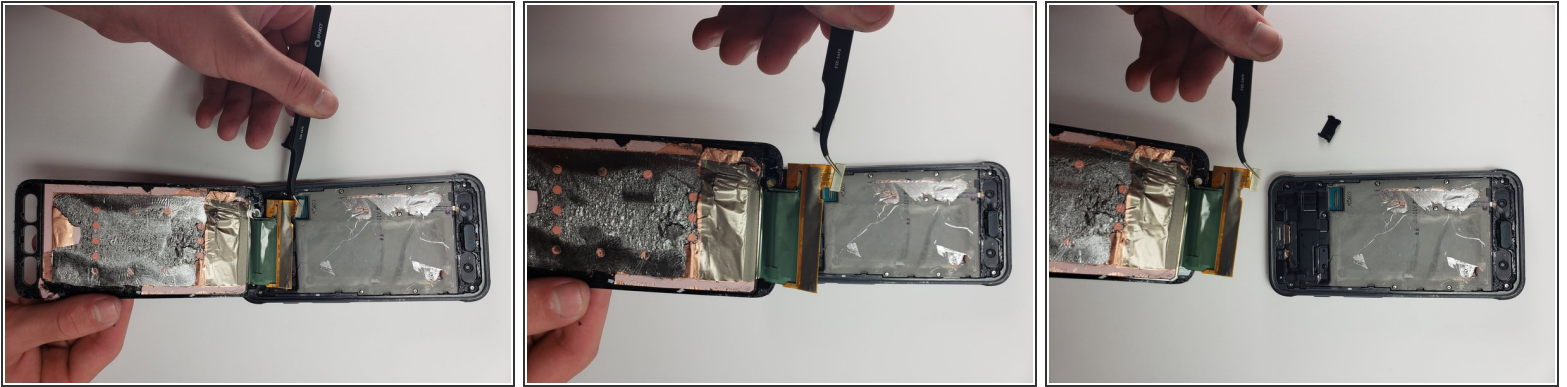

- Use the tweezers to disconnect the screen from the phone by detaching the connection.

Step 6

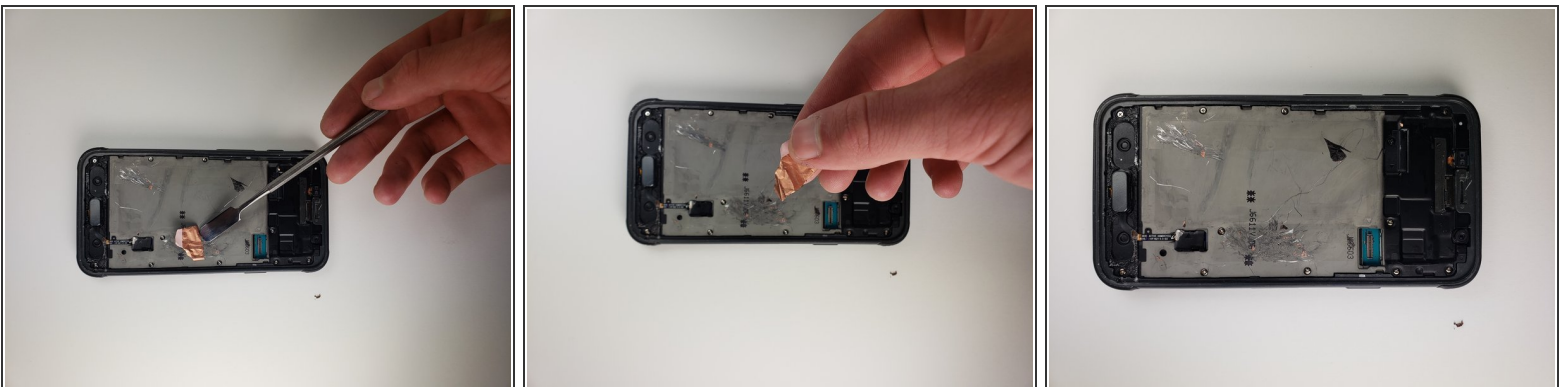

- Clean the rest of the adhesive left on the phone by scraping it off with a metal tool.
- Apply rubbing alcohol on the adhesive to make sure phone is free of any adhesive. Do this by applying some rubbing alcohol onto a napkin.
- Lightly proceed to clean the phone with that napkin.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-12 03:38:31 AM.