



# General Electric Telephone 2-9710A Phone Cord Replacement

Replace the phone cord that attaches the handset to the base of the telephone

Written By: Norberto Sanchez



---

## INTRODUCTION

Use this guide to replace the cord that connects the handset and the base

---

### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-


## Step 1 — Phone Cord



**!** Unplug the device before proceeding.

- Remove the phone cord from the phone jack from the base of the headset.
- Use a plastic opening tool to remove the phone cord.

## Step 2

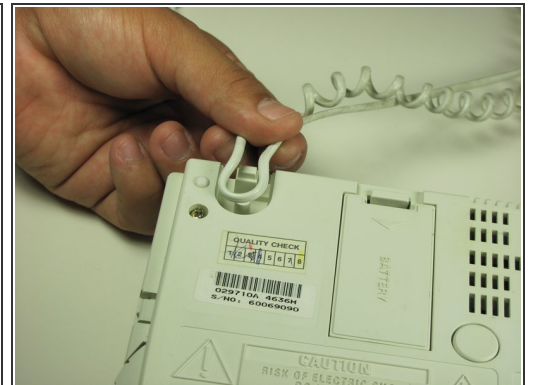

- Remove the phone cord screw cap.
  - Unscrew the 7.5mm screw.
  - Remove the screw cap.
- Remove the cord from the phone base.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-16 01:53:42 PM.