



General Electric Telephone 2-9710A Phone Cord Replacement

Replace the phone cord that attaches the handset to the base of the telephone

Written By: Norberto Sanchez



INTRODUCTION


Use this guide to replace the cord that connects the handset and the base

TOOLS:

- [Phillips #1 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-


Step 1 — Phone Cord



 Unplug the device before proceeding.

- Remove the phone cord from the phone jack from the base of the headset.
- Use a plastic opening tool to remove the phone cord.

Step 2

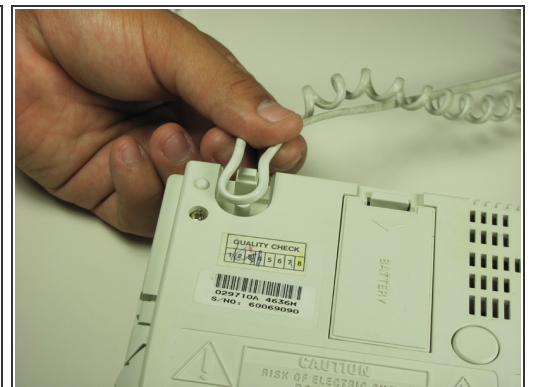

- Remove the phone cord screw cap.
 - Unscrew the 7.5mm screw.
- Remove the screw cap.
- Remove the cord from the phone base.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-12-25 11:46:05 PM.