




Raleigh M20 Pedal Removal

By the end of this guide one should be able to replace old or broken bicycle pedals.

Written By: William Beechinor

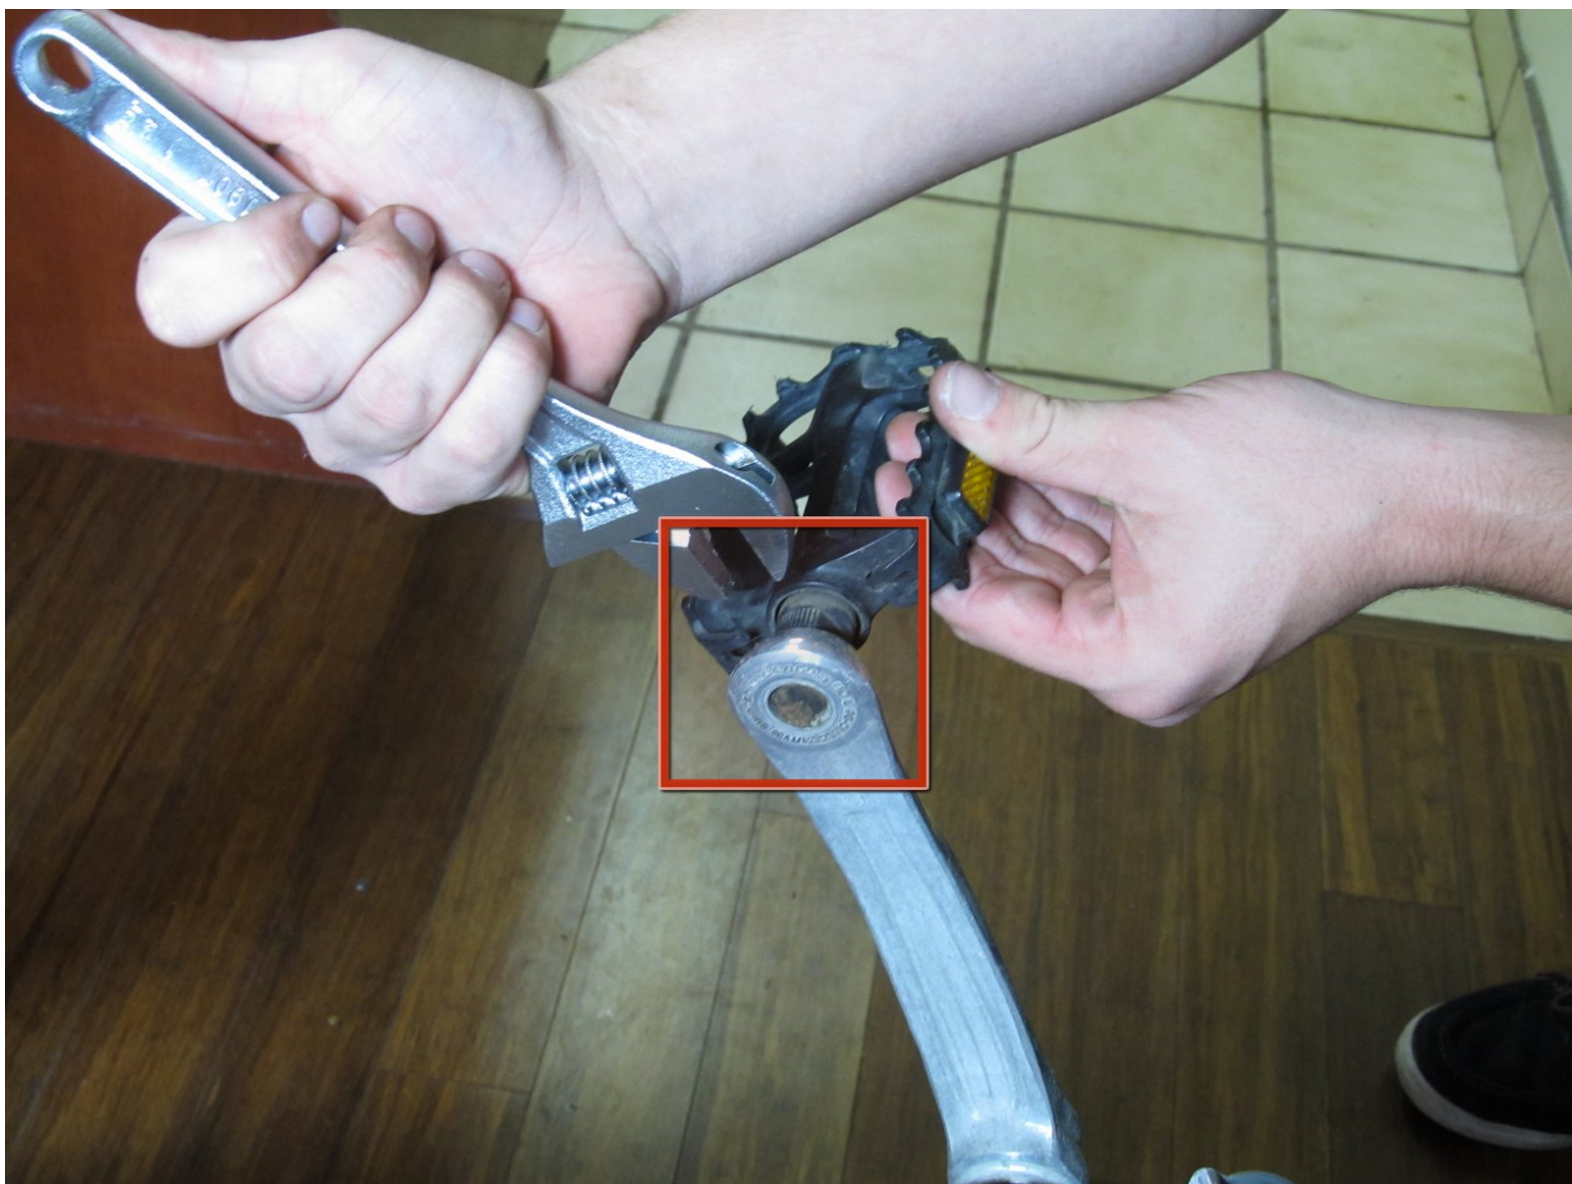

INTRODUCTION

This guide will show you how to remove a broken or malfunctioning pedal and replace it with a new one.



TOOLS:


- [Adjustable 8inch Crescent Wrench](#) (1)



PARTS:

- [Pedal](#) (1)

Step 1 — Raleigh M20 Pedal Removal

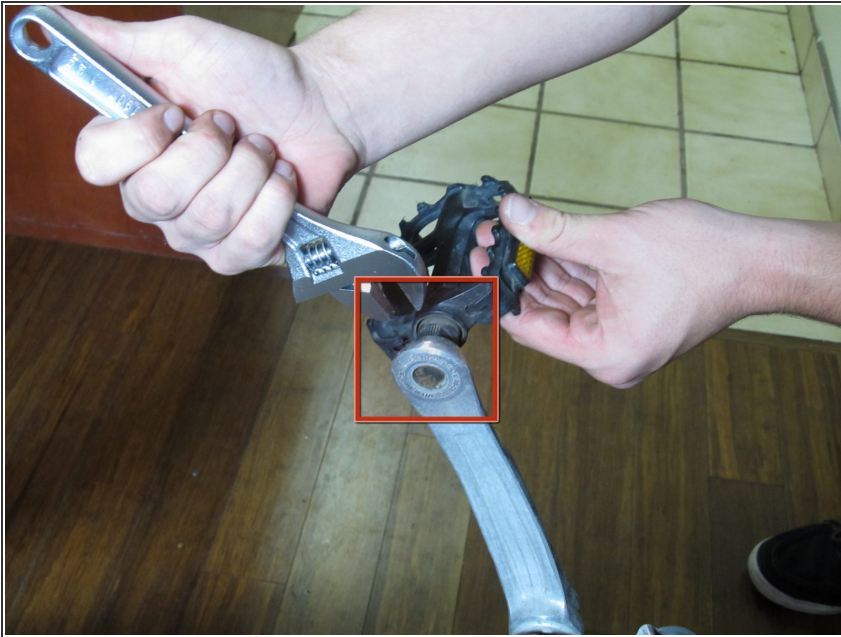

- First take an 8 in adjustable crescent wrench and fit it around the base of the pedal.

Step 2



- To unscrew the chain side pedal twist the the wrench counter clockwise.
- To unscrew the pedal that is on the side away from the chain, twist the wrench clockwise.

Step 3



- Continue turning the wrench until the pedal detaches from the crank arm.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-14 06:50:01 PM.