



# General Electric Telephone 2-9710A 9V Base Battery Replacement

Replace the the battery that powers the base

Written By: Norberto Sanchez



## INTRODUCTION

Use this guide to replace the 9 Volt battery that powers the base



### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)




### PARTS:

- [9 Volt Alkaline Battery](#) (1)


## Step 1 — Phone Cord



 Unplug the device before proceeding.


- Remove the phone cord from the phone jack from the base of the headset.
- Use a plastic opening tool to remove the phone cord.

## Step 2

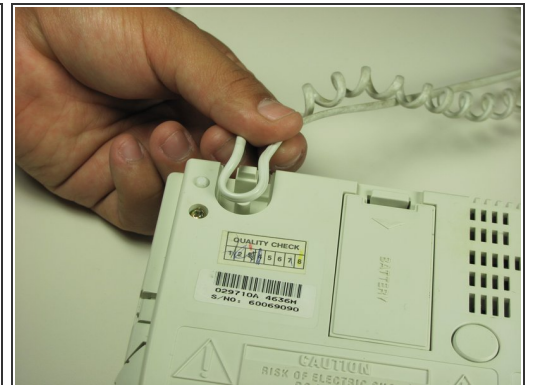

- Remove the phone cord screw cap.
  - Unscrew the 7.5mm screw.
- Remove the screw cap.
- Remove the cord from the phone base.

### Step 3 — 9V Base Battery

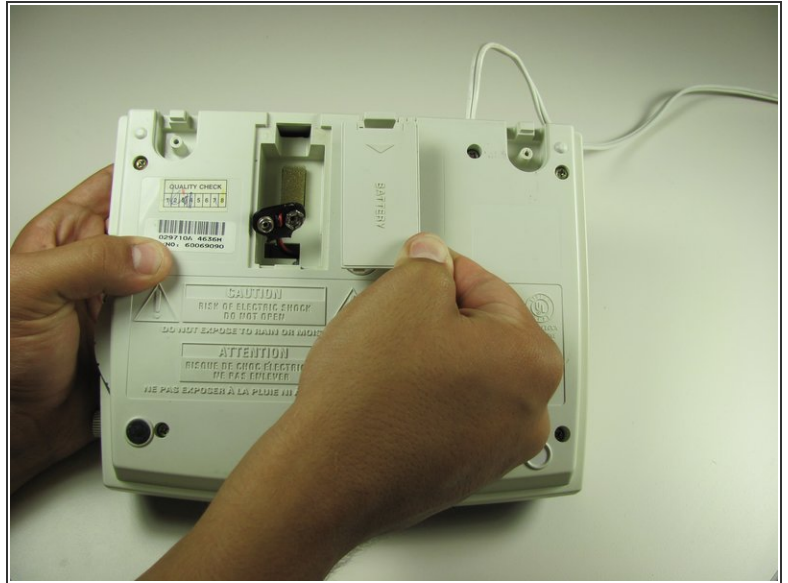

- Use finger to remove the battery cover.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-09 06:20:27 PM.