



# Hair Dryer Grating Replacement

This guide helps remove and reinstall the grating on a hair dryer.

Written By: Mitch



 **TOOLS:**

- [Phillips #1 Screwdriver](#) (1)
-

## Step 1 — Nozzle




- Identify the black air concentrating nozzle.

## Step 2



- Remove the black air concentrating nozzle by gently twisting and pulling the nozzle.

### Step 3 — Grating

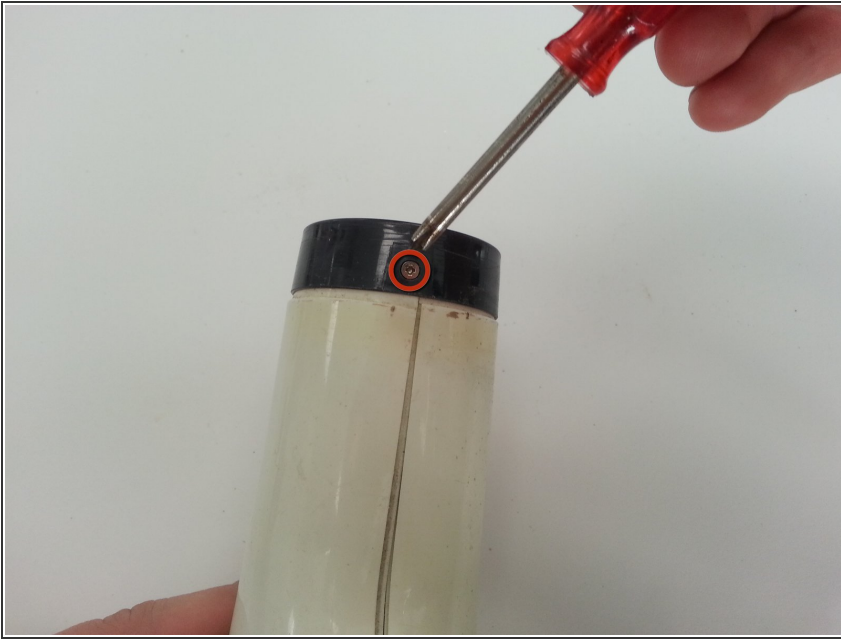

- Using a screwdriver, remove the screw located underneath the air concentrating nozzle. This screw attaches the hair dryer body to the hair dryer grating.
- ⓘ The purpose of this guide is to demonstrate the repair steps for a generic hair dryer. We do not specify screw sizes because screw sizes can differ between hair dryers. For most hair dryers, use a Phillips #1 Screwdriver. For hair dryers with smaller screws, consider using a Phillips #00 Screwdriver.

### Step 4



- Detach the hair dryer grating from the body by gently twisting the grating from side to side.



## Step 5



- Separate the hair dryer grating into the three pieces seen in the image.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-15 07:16:55 AM.