




Nokia 8290 Circuit Board Replacement

Use this guide to replace or maintain your Nokia 8290's circuit board.

Written By: Parker Niebauer

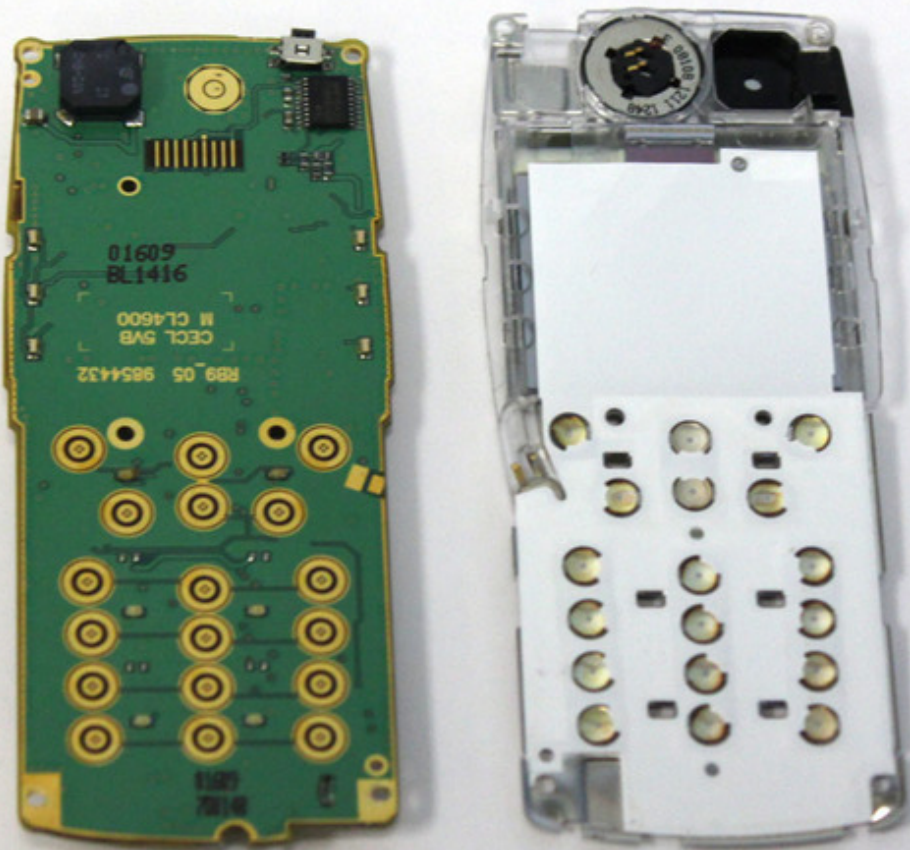

INTRODUCTION

The circuit board processes all the information the phone uses. Removing the circuit board allows access to several underlying components.

TOOLS:




- [64 Bit Driver Kit](#) (1)
-

Step 1 — Front Cover



- Locate the small button on the top of the phone.
- Depress the button.
- With your other hand, pull the front cover away from the phone.




Step 2 — Circuit Board

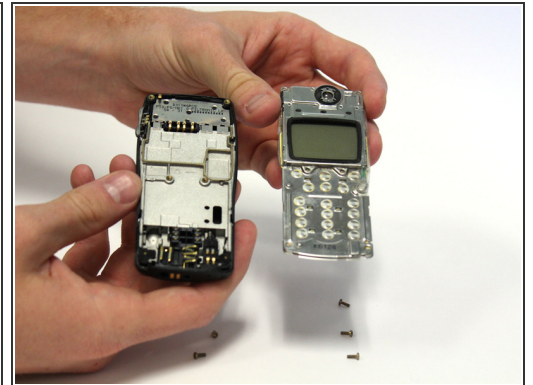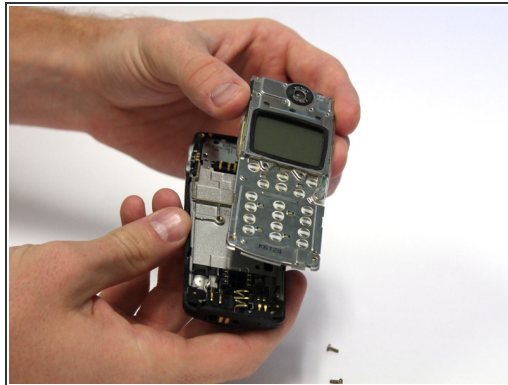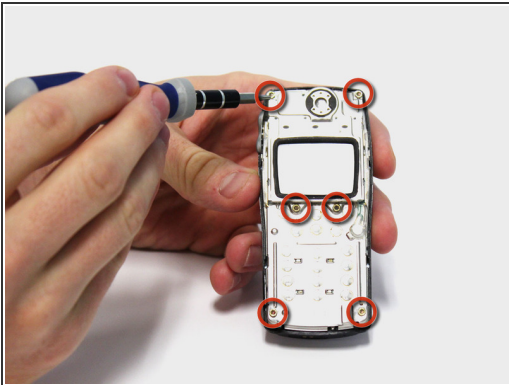

- Remove all six 5.3 mm long T6 screws.
- Remove the circuit board/faceplate sub-assembly from the back of the phone.

⚠ Take care to place screws in a safe location.

Step 3

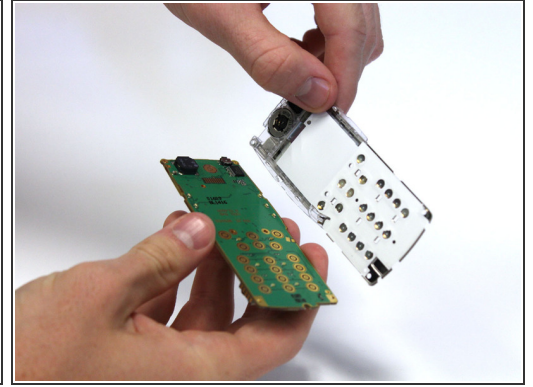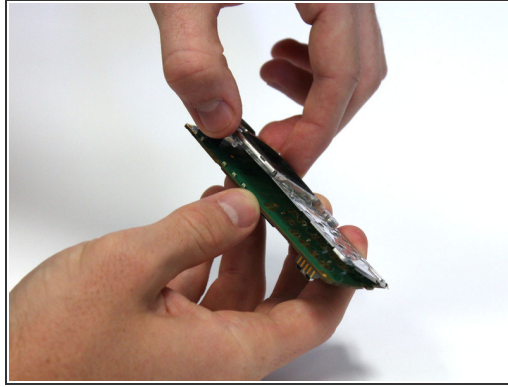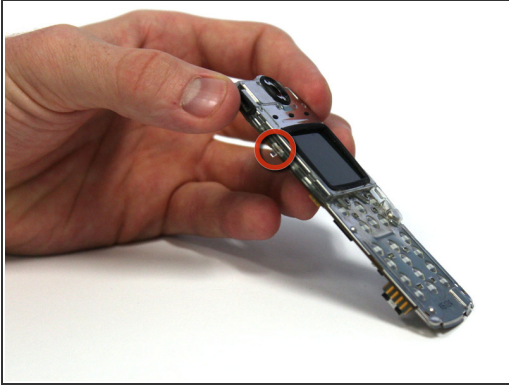

- Using your fingers, pull the small plastic tab away from the circuit board/faceplate sub-assembly.
- Rotate the faceplate away from the circuit board.
- Gently remove the faceplate from the circuit board, taking care to not break the small plastic tab on the other side of the sub-assembly.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-12-25 07:07:00 PM.