



# HP Pavilion 15-cc023cl Battery Replacement

Replace the battery to restore power to your dying laptop.

Written By: Stephanie Henry



## INTRODUCTION


Make sure the power cord is not plugged in and that the device is powered completely off before you begin. Before making any hardware changes to this laptop, make sure the battery is completely removed. This will make repair safer for both you and your laptop.

---

### TOOLS:

- [Phillips #000 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Battery

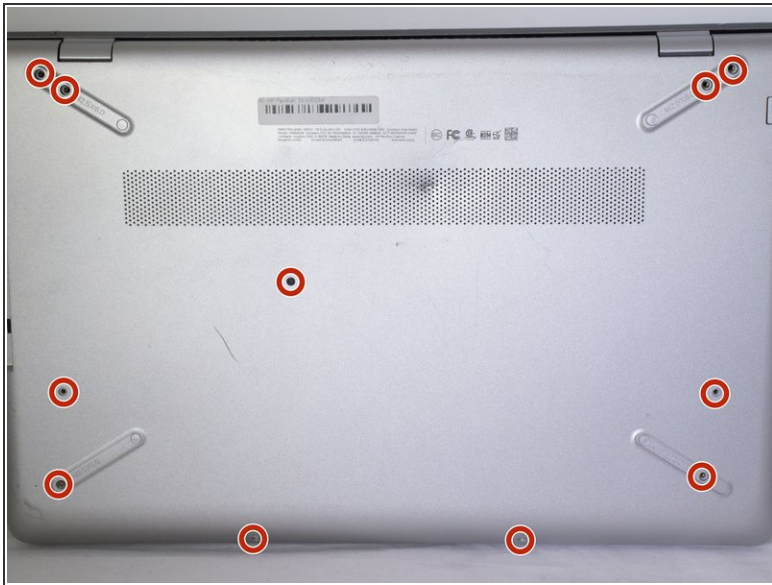


- Use a PH000 screwdriver to unscrew the eleven 4mm Phillip head screws located on the back panel.

## Step 2




- Using the iFixit opening tool, pry open and remove the back cover of the laptop.
- ⚠ Be gentle when applying force to the cover.

### Step 3

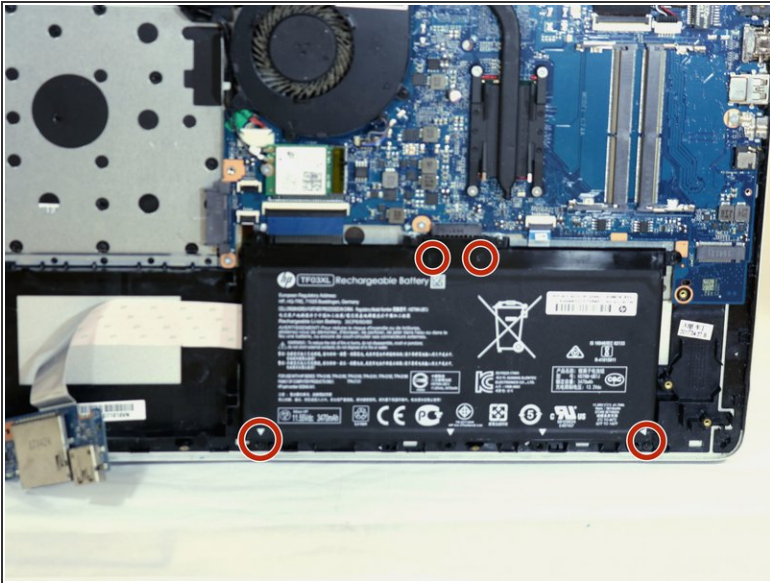

- Use a PH000 screwdriver to unscrew the four 3.5mm Philips head screws located on the battery.

### Step 4

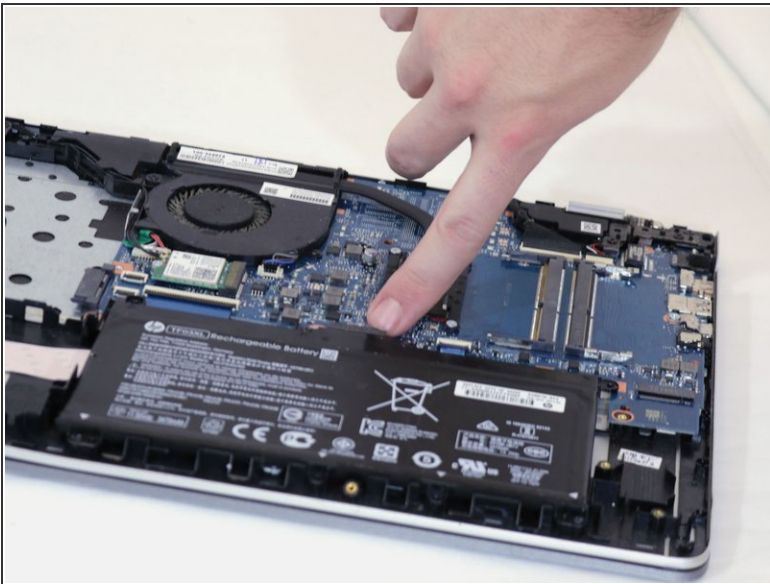

- Disconnect the port connecting the battery and the motherboard and then remove.

To reassemble your device, follow these instructions in reverse order.

