




ASUS K200MA-DS01T Back Panel Removal

This guide will help you remove the back panel of your Asus K200MA-DS01T.

Written By: Haleigh St. Paul

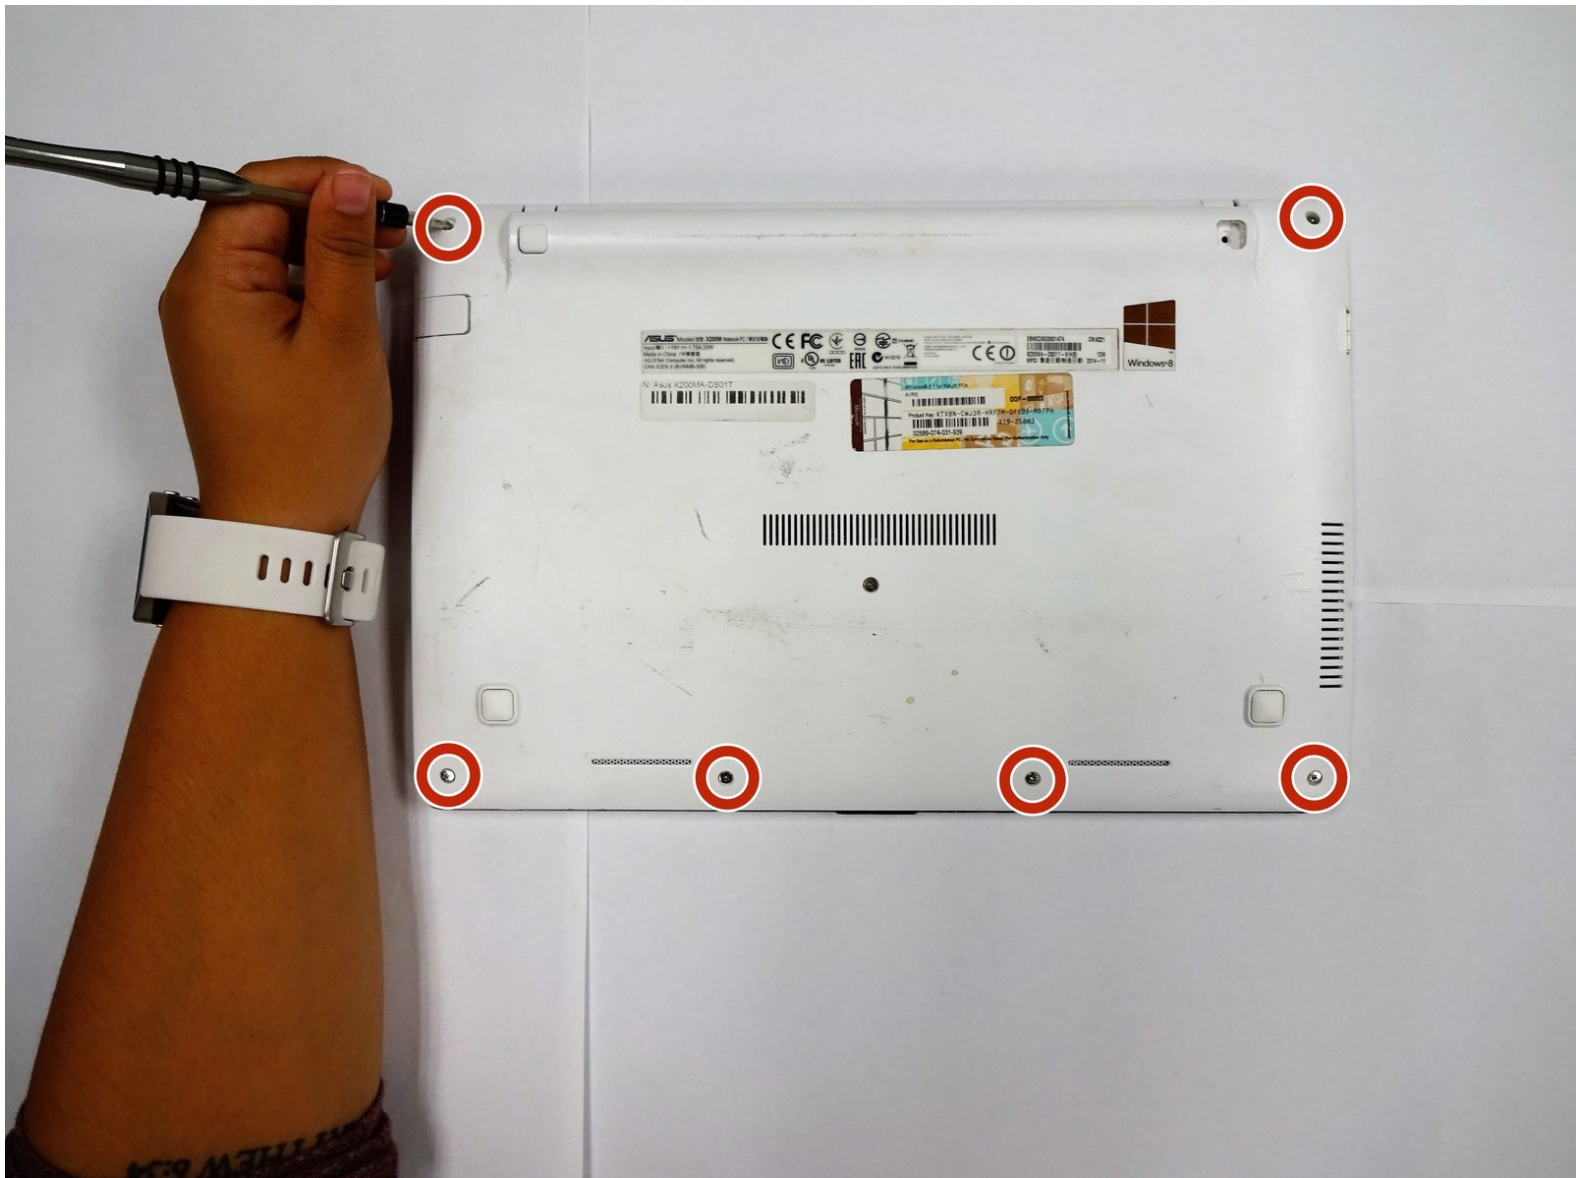



INTRODUCTION

This guide will show you how to remove the back panel of an Asus K200MA laptop.

TOOLS:



- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Back Panel

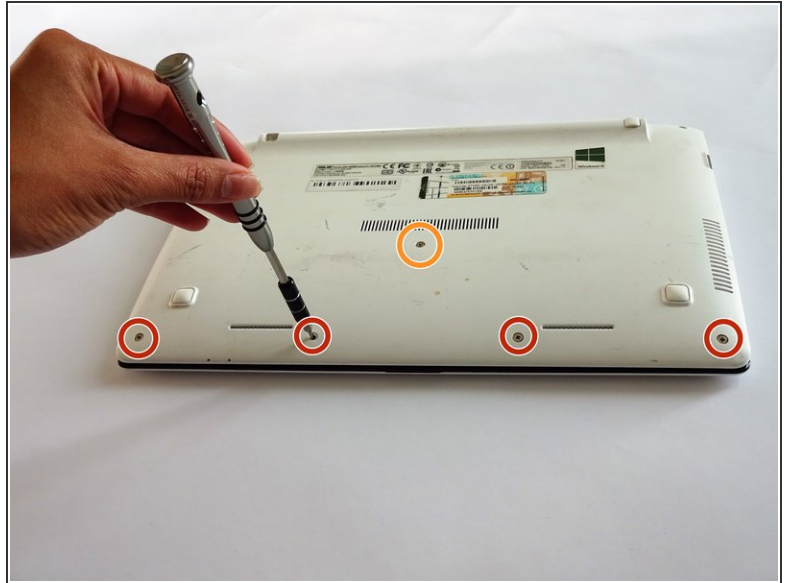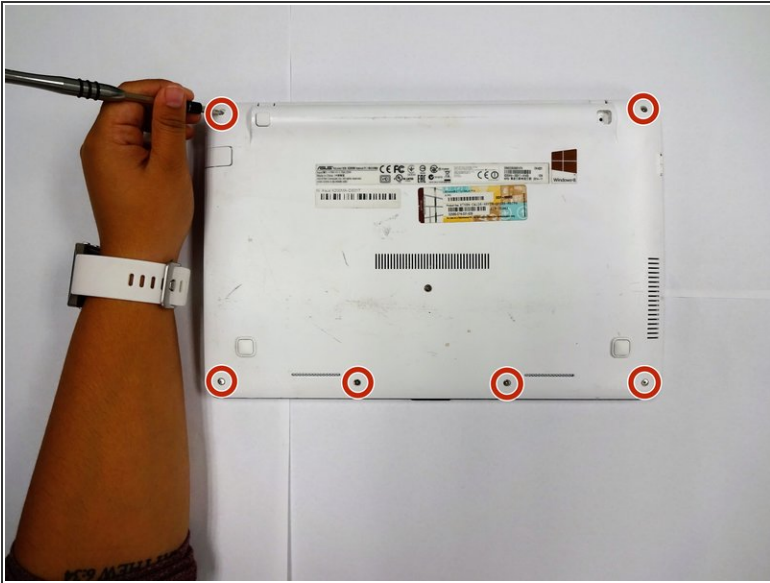


- With the opening facing you, flip the laptop over and remove the following screws from the back panel:
 - Six 4mm Phillips screws using a Phillips #0 screwdriver.
 - One 12mm Phillips screw in the center using a Phillips #0 screwdriver.

Step 2

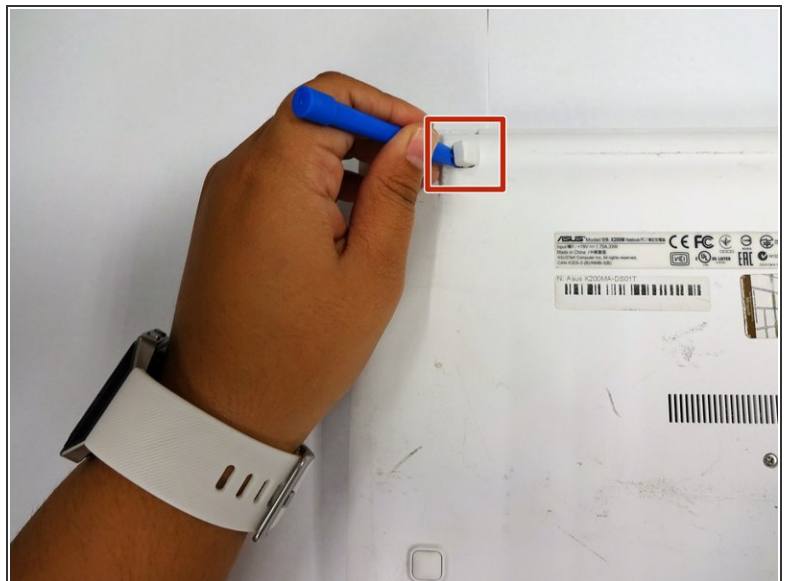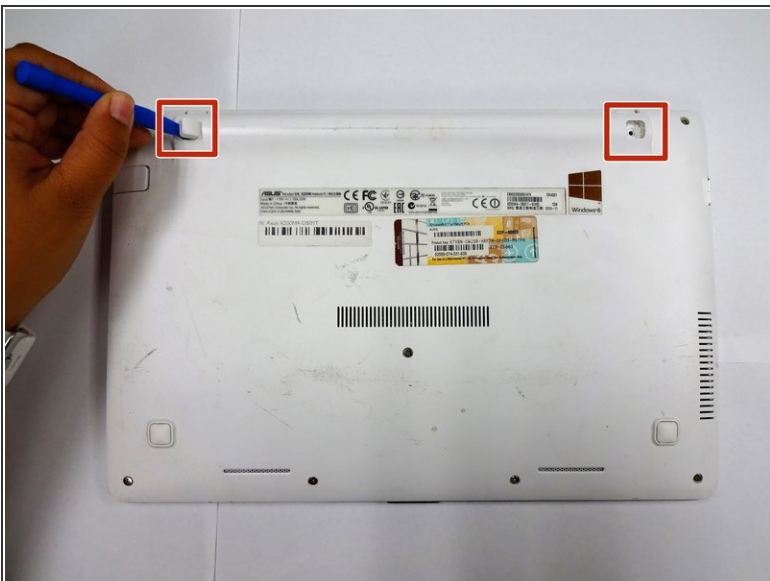

- Using a plastic spudger, remove the two rubber stoppers closest to the hinge to reveal screws underneath.

Step 3

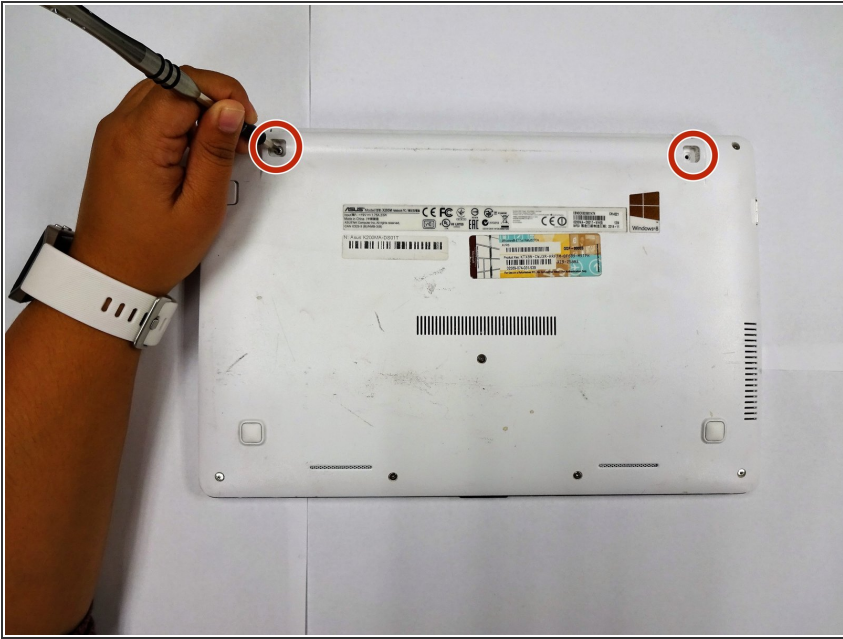

- Remove the following screws:
 - Two 4mm Phillips screws using a Phillips #0 screwdriver.

Step 4



- Using a plastic spudger (and a fair amount of force), pry the back panel up from the keyboard to separate.
- ⓘ You may have to use one spudger to wedge between the back panel and keyboard while using another to pry it open in a different spot.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-17 05:38:03 PM.