



Dell XPS 15 9550 Back/Underside Panel Replacement

Remove the panel on the bottom of the laptop, exposing the inside components.

Written By: Brandon Schmidt



INTRODUCTION

Before the majority of components can be accessed to be replaced, the back panel will need to come off.

TOOLS:


- [T5 Torx Screwdriver](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back/Underside Panel



- Turn the laptop upside down.
- ⚠ Make sure the laptop is turned off.
- Using the T5 Torx Screwdriver, remove the ten 3 mm long screws from the perimeter of the back of the laptop.

Step 2

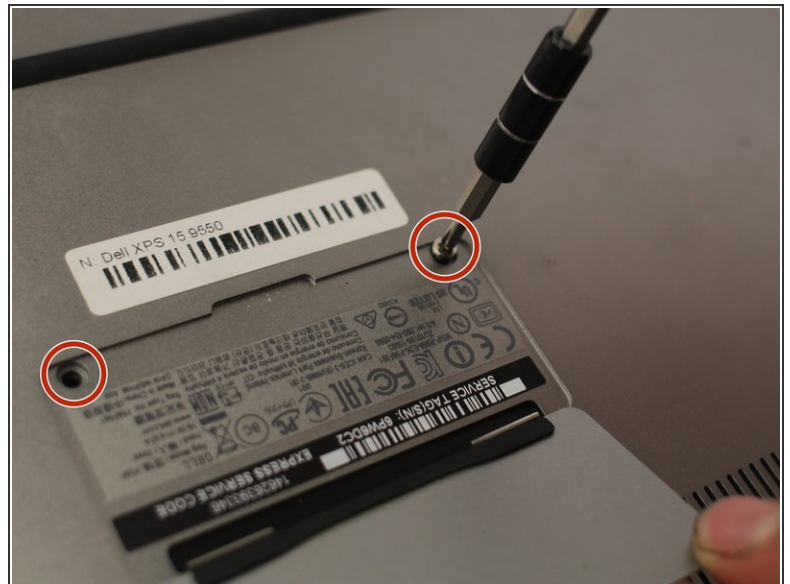


- Open up the information panel door (on the middle of the back side).
- While holding the door open, use the Phillips #00 Screwdriver to remove the two 10 mm long screws.

Step 3



- Carefully lift 2 corners of the back panel upwards, releasing the whole panel.

 Do not force the panel off. If it does not come off easily, try using a plastic spudger where it is stuck.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-01-05 10:56:43 AM.