



Samsung Galaxy Y Touch Screen Replacement

This guide will teach you how to replace the Samsung Galaxy Y's touchscreen display.

Written By: Aidan Kurz



INTRODUCTION

This guide will describe how to replace a Samsung Galaxy Y's touchscreen and LCD display, should the touchscreen be cracked or the LCD malfunction and cause the phone to display only a black screen.


TOOLS:

- [iFixit Opening Tools](#) (1)
- [Tweezers](#) (1)
- [Metal Spudger](#) (1)
- [Phillips #000 Screwdriver](#) (1)

PARTS:

- [Samsung Galaxy Y Touch Screen Display](#) (1)

Step 1 — Back Panel

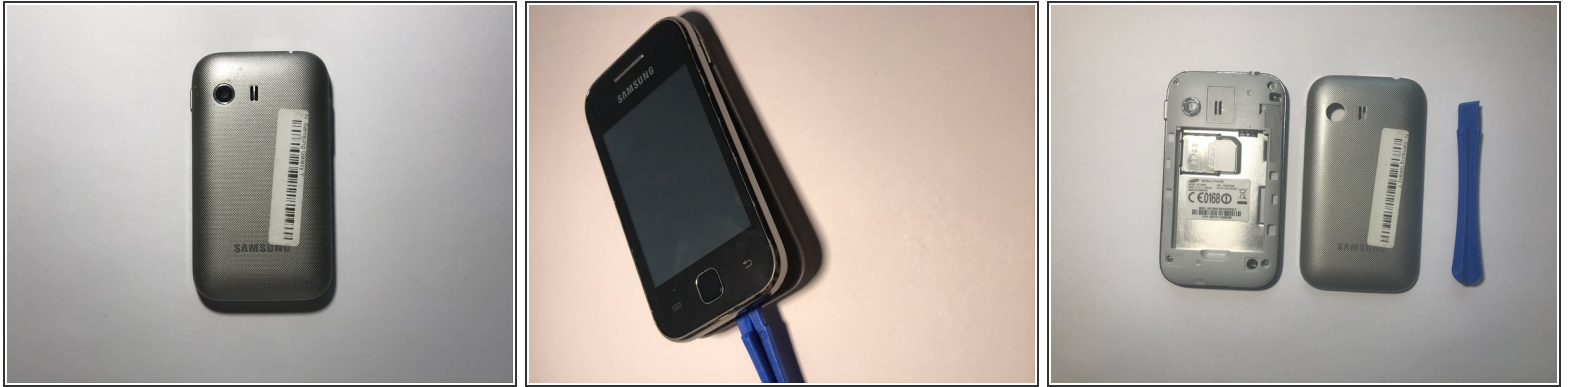


- Use the blue plastic opening tool to pry the back-panel off of the device.

Step 2 — Touch Screen/Display



- Use the screwdriver with a Phillips #000 screwdriver head to remove the four 5mm screws located in the corner of the interior back panel.
- Remove the SD card as well by sliding the card out of it's slot.

Step 3

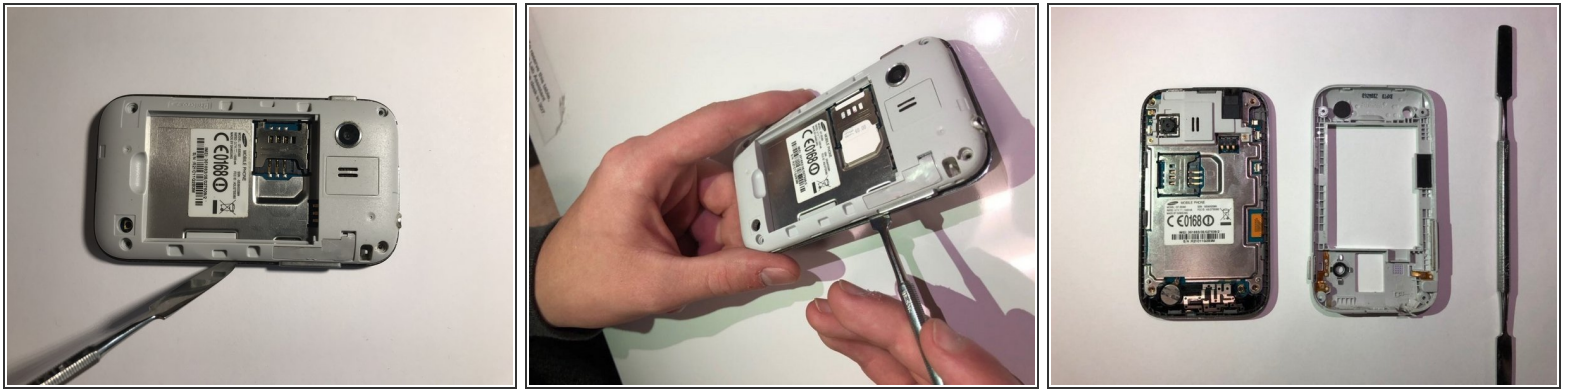

- Use the metal pry tool to separate the interior back panel from the interior hardware and screen.

⚠ Using a metal spudger may cause further damage to your device.

Step 4



- Disconnect the orange motherboard connection, then remove the interior hardware from the front screen display.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-08-25 07:15:51 AM.