



Asus VivoTab Note 8 IO Board Replacement

How to remove the IO Board from the Asus VivoTab Note 8.

Written By: Ryan Spencer



INTRODUCTION

Before removing the IO Board you have to remove the back panel. The IO Board is hidden in the bottom right of the device, and is mostly covered.

TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
-

Step 1 — Back Panel



- First take the pen out, it may get in the way when you are opening the device. If you have a memory card, you should also remove it.
- Use the plastic opening tool to pry open the edges of the cover. The memory card slot is very useful for getting started.

Step 2

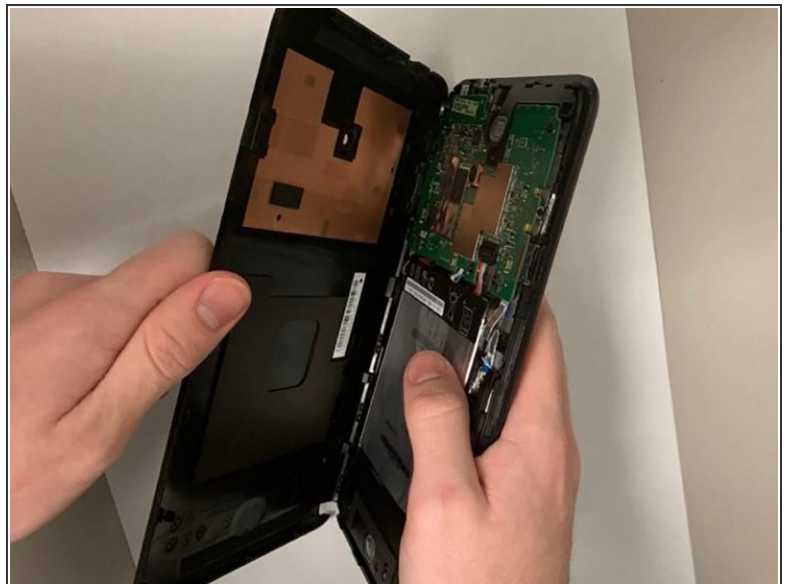

- Move the opening tool along the edges of the tablet and push up wherever you can. You may need to open up all of the sides to take the panel off.
- Then pull apart the sides of the casing.

Step 3





- After pulling the panel off, put it to the side.

Step 4 — IO Board



- After removing the back panel, you will see the IO Board under another removable plastic piece.

Step 5

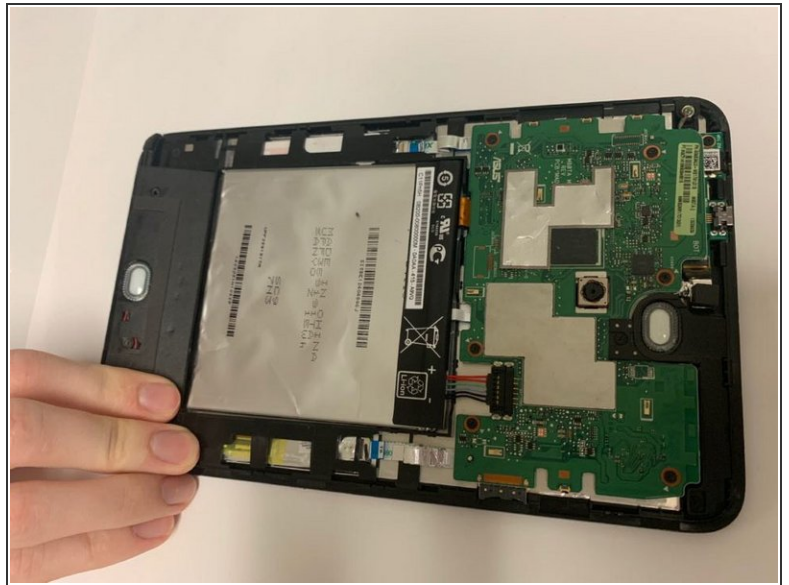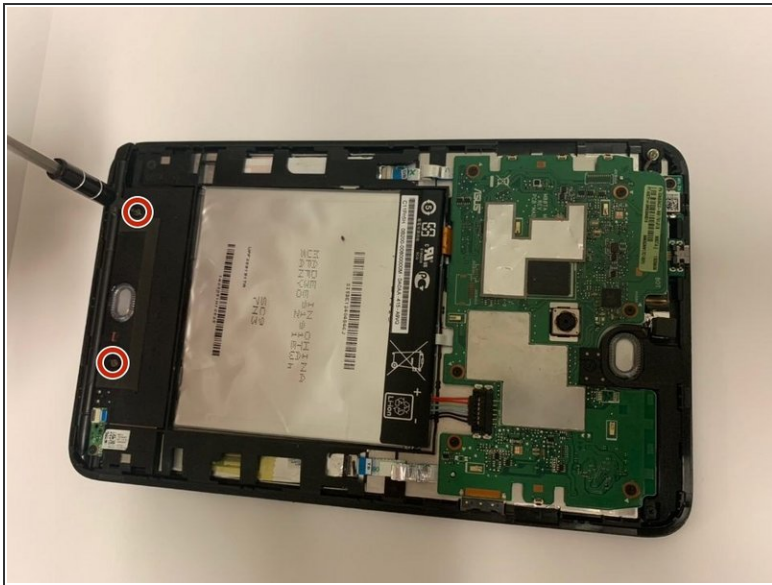

- Unscrew the two screws of the plastic piece, and lift it off.

Step 6



- Unscrew the screw holding down the IO Board.
- Pull out the ribbon (hold the ribbon with one hand and the board with the other, then pull) and remove the IO Board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-16 03:37:36 AM.