



Huawei Pronto LTE Motherboard Replacement

This guide will show you how to open the phone and to remove the motherboard.

Written By: Ryan Mascia



INTRODUCTION

The motherboard is the most important part in any electronic, It allows all the parts to work together. This guide will show you how to open the phone and get to the motherboards to replace it.

TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
-

Step 1 — Motherboard



- Use the opening tool from the iFixit kit to get under the back cover and, gently separate the back from the front.

Step 2

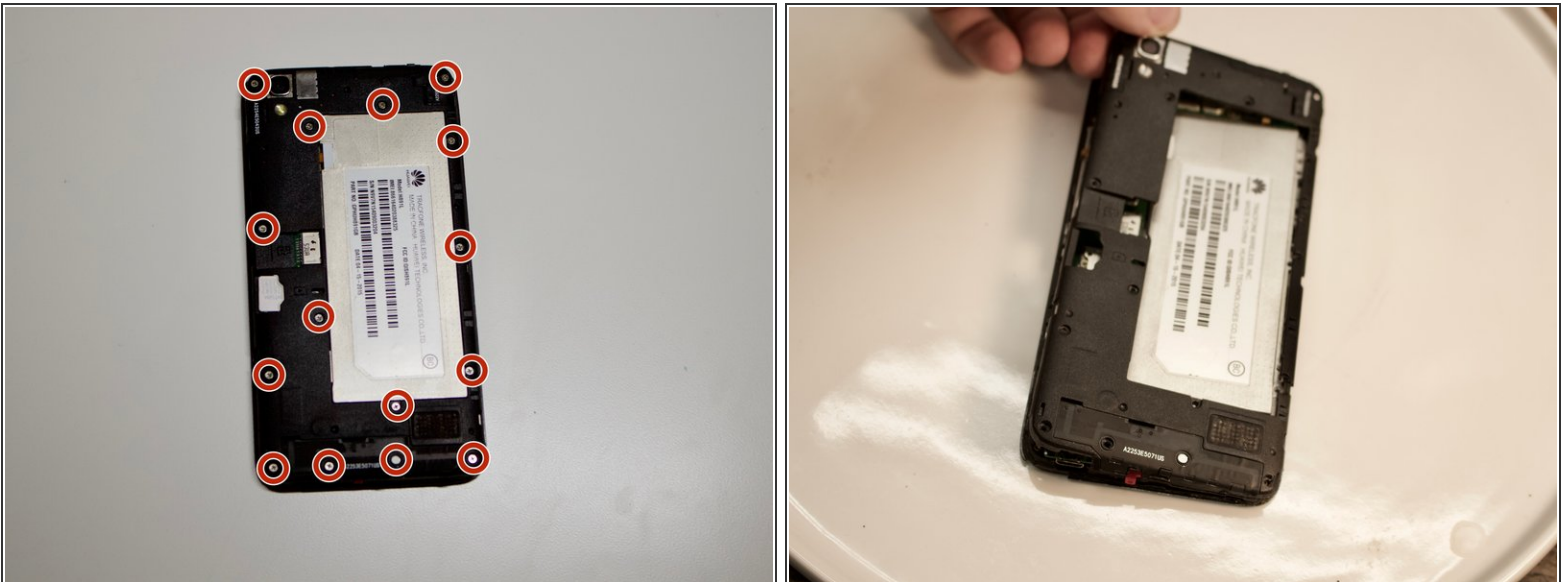

- Remove the 15 screws on the back of the phone with a Phillips #000 screwdriver.

Step 3



- Disconnect the connectors from the motherboard and gently remove the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2019-07-17 04:32:49 PM.