



Asus F554LA-WS52 Speakers Replacement

How to replace Asus F554LA-WS52 speakers.


Written By: Matthew Belz



 **TOOLS:**

- [iFixit Opening Tools](#) (1)
-

Step 1 — Speakers

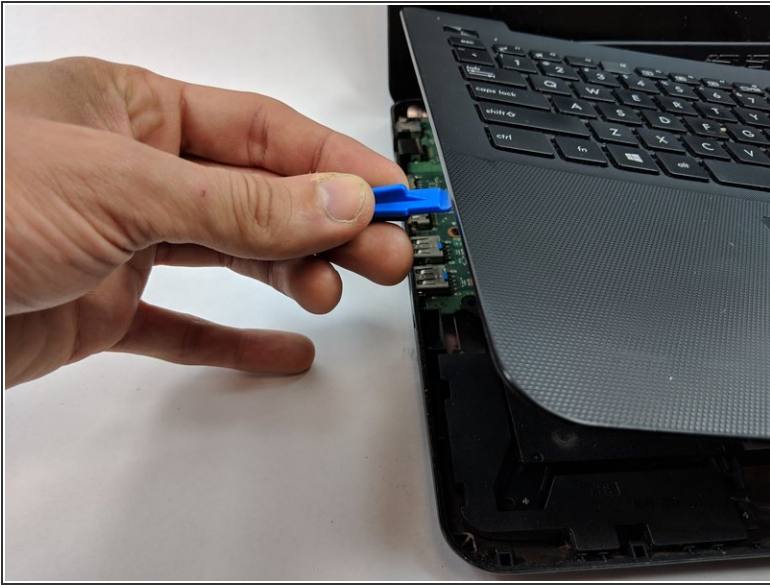


- Using the plastic opening tool, gently pry open the keyboard.
- Once the keyboard is up, gently remove it.

Step 2





- Speakers are located on the bottom left hand side of the device.

Step 3

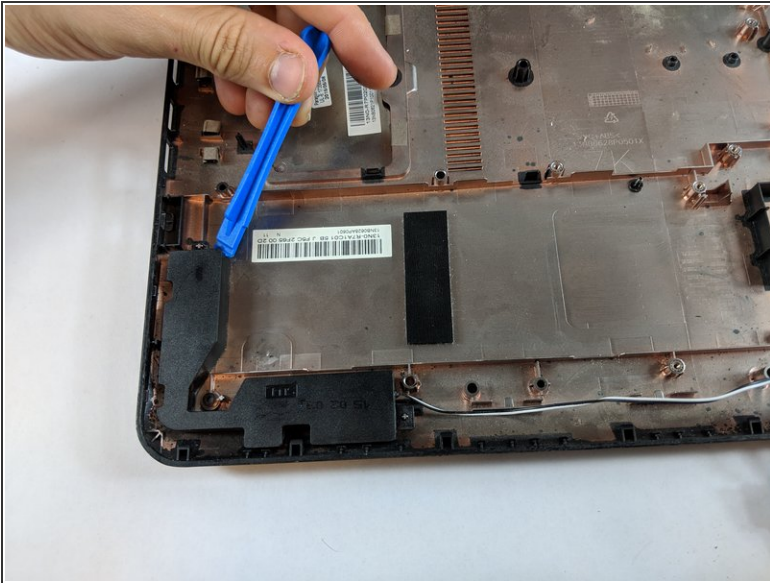

- Use the plastic opening tool to release the speaker from its position.

Step 4

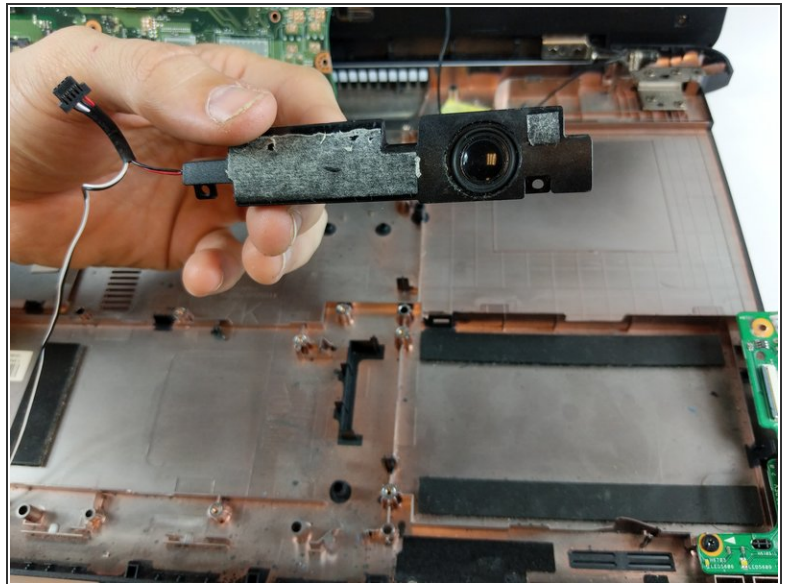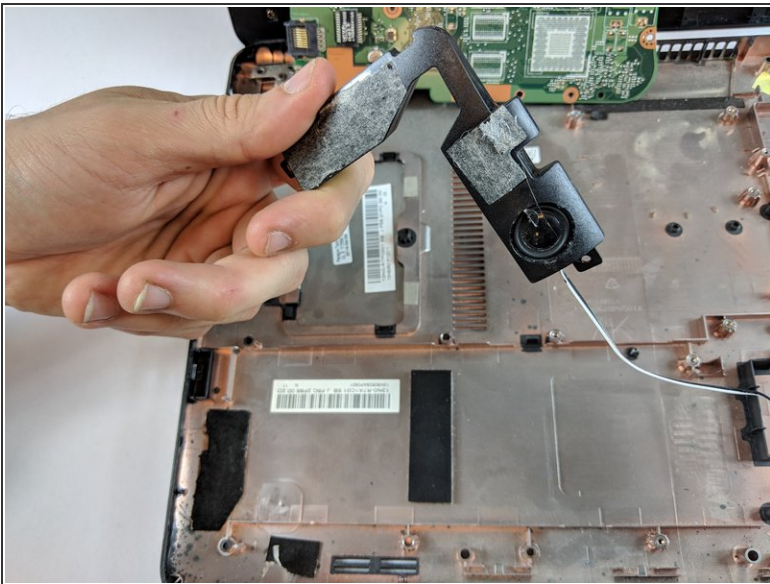

- After the speaker is completely out, gently remove the wire that is attached to the speaker.

To reassemble your device, follow these instructions in reverse order.

