



HP Officejet J4550 All-in-one Glass Plate Replacement

This guide explains how to remove the glass plate in your HP Officejet J4550.

Written By: Jiayin Zhu



INTRODUCTION

Is the glass plate in your printer broken? Consider using this guide to replace the glass plate in your printer.

TOOLS:

- [T8 Torx Security Bit Screwdriver](#) (1)
-

Step 1 — Glass Plate




- Insert 2 fingers in the dent on the right side of the printer and pull towards the front of the printer.
- Using fingers to open the cover of the scanner which located on the top of the printer.

Step 2



- Remove four 10mm screws on the panel with T8 torx security screwdriver.
- Remove the cover of the top part.

Step 3

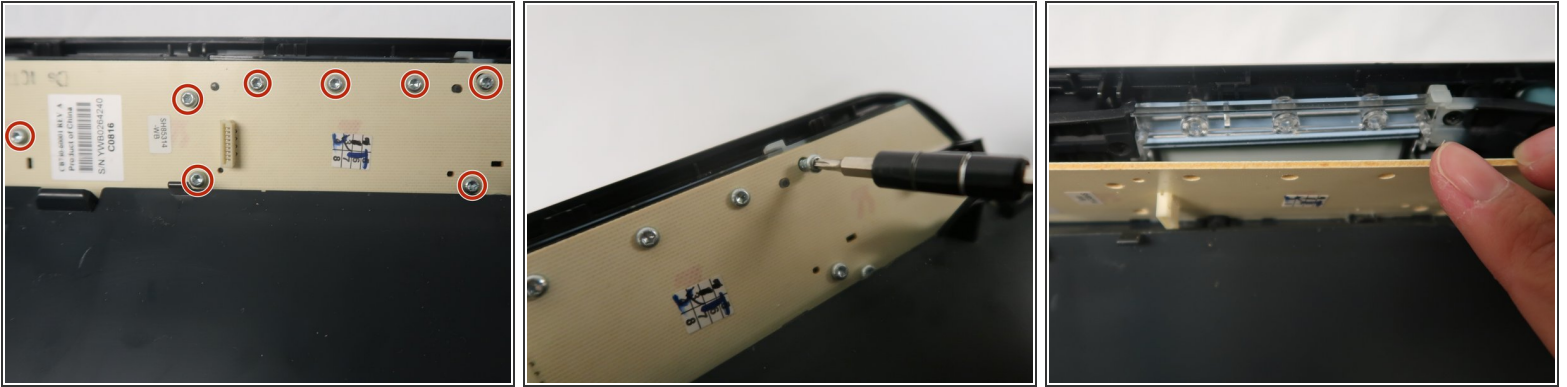


- Remove eight 10mm screws on the back of the controlling keyboard with T8 torx security screwdriver.
- Remove the back board of the controlling keyboard.

Step 4




- Remove the controlling keyboard with hands.

Step 5

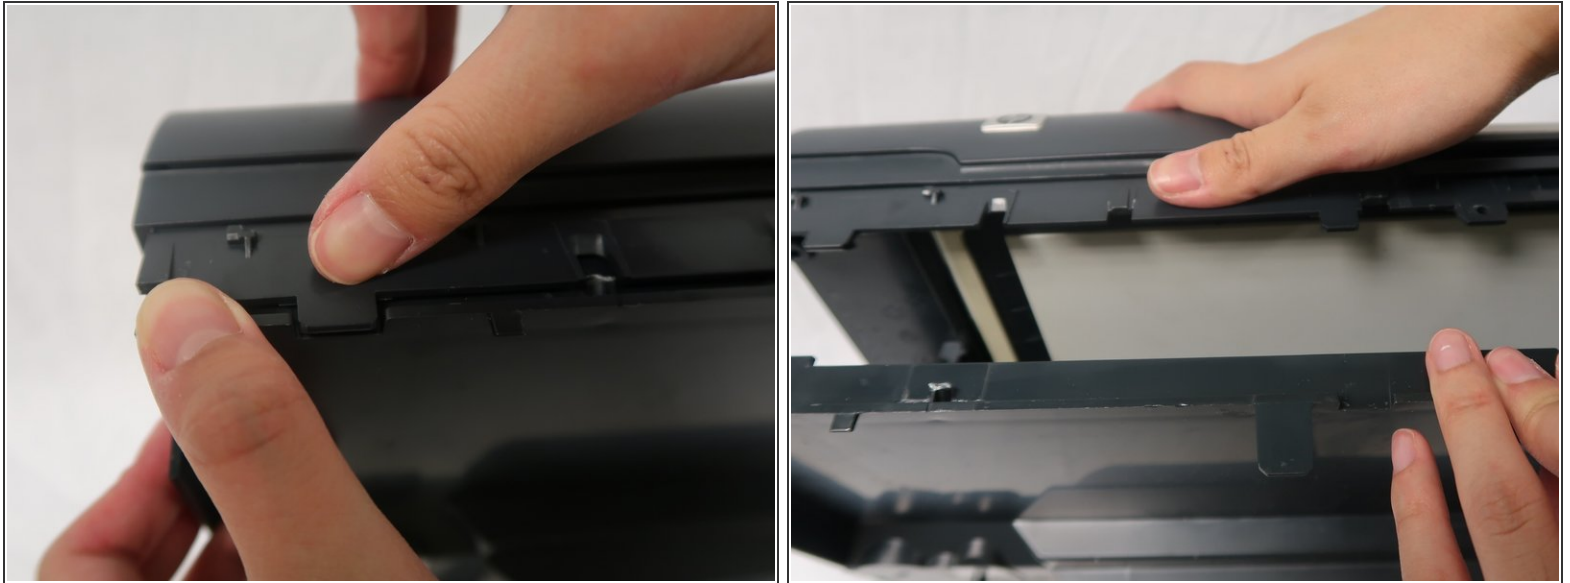


- Using fingers to open the back cover board of the glass plate.

Step 6

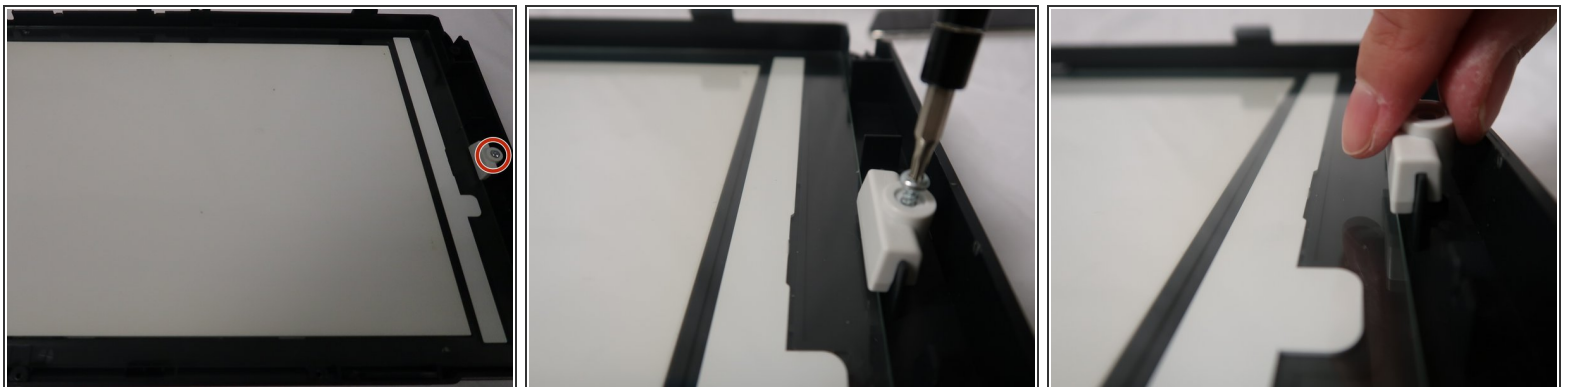

- Remove the 10mm screw on the right of the board with T8 torx security screwdriver.
- Remove the part that is under the 10mm screw.

Step 7

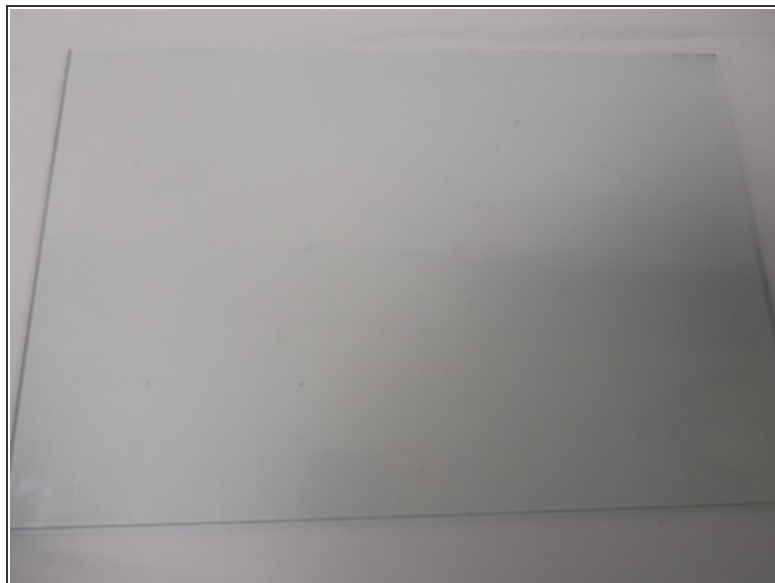

- Remove the glass plate with hands.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-12-15 02:22:31 AM.