



# Hover-1 XLS Back Seat Light Replacement

How to replace the back seat light on a Hover-1 XLS.

Written By: Christian Roberts



---

## INTRODUCTION

A broken light on a Hover-1 XLS bike is a safety hazard, especially if you use the bike when dark. Do not ride the bike with a broken tail light.

---


### TOOLS:

- [Phillips #2 Screwdriver](#) (1)
-

## Step 1 — Back Seat Light



- Remove the seat by removing the six 16mm screws with a Phillips #2 screwdriver.


 Remember that the seat is still connected by the wiring once you unscrew it. Pulling too hard can damage the connector.

## Step 2



- Disconnect the wires by pushing the levers on either side of the connector and on top.
- Remove the seat from the bike.

### Step 3

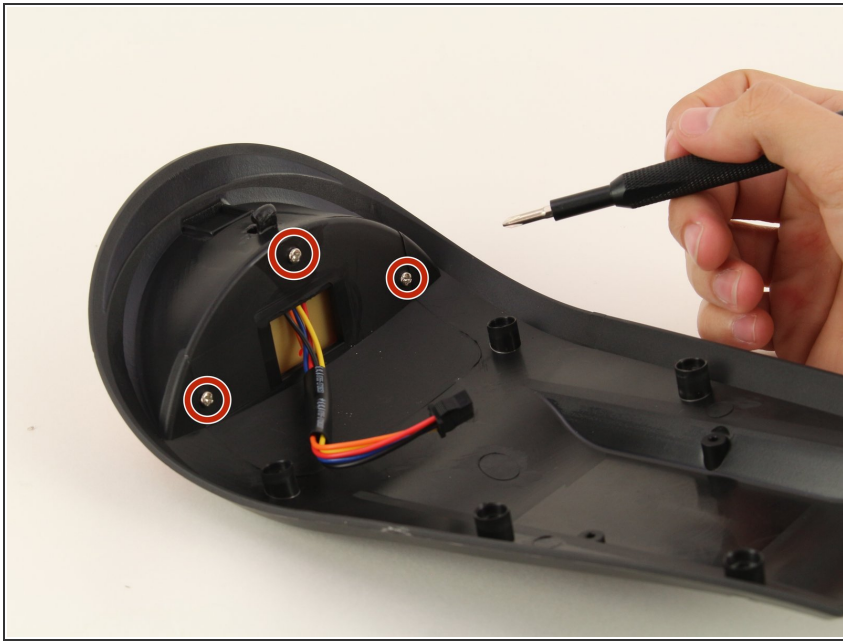

- Use a Phillips #2 screwdriver to remove the four 10mm screws on the bottom of the back seat.

### Step 4



- Pull the light from behind the bottom of the seat frame. Pull the wiring all the way through.

To reassemble your device, follow these instructions in reverse order.

