



HP Spectre x360 13t-4000 Battery Replacement

This guide will instruct you how to replace the battery on the HP Spectre x360 13t-4000.

Written By: Brandon Carvalho



INTRODUCTION

This guide will instruct you on how to remove and replace the battery. Battery replacement may be necessary if the battery is not able to hold a charge.

TOOLS:

- [iFixit Opening Tools](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [Phillips #1 Screwdriver](#) (1)

PARTS:

- [HP Spectre x360 13 Replacement Battery](#) (1)

Step 1 — Backplate




- Turn off and unplug the laptop.
- Flip over the laptop so that the bottom backplate is exposed.

Step 2



- With a hex T5 screwdriver remove the six 3mm screws holding the backplate.
- Using the same screwdriver, remove the two 7mm screws.
- With all the screws removed, use a plastic opening tool to lift off the backplate.

Step 3 — Battery

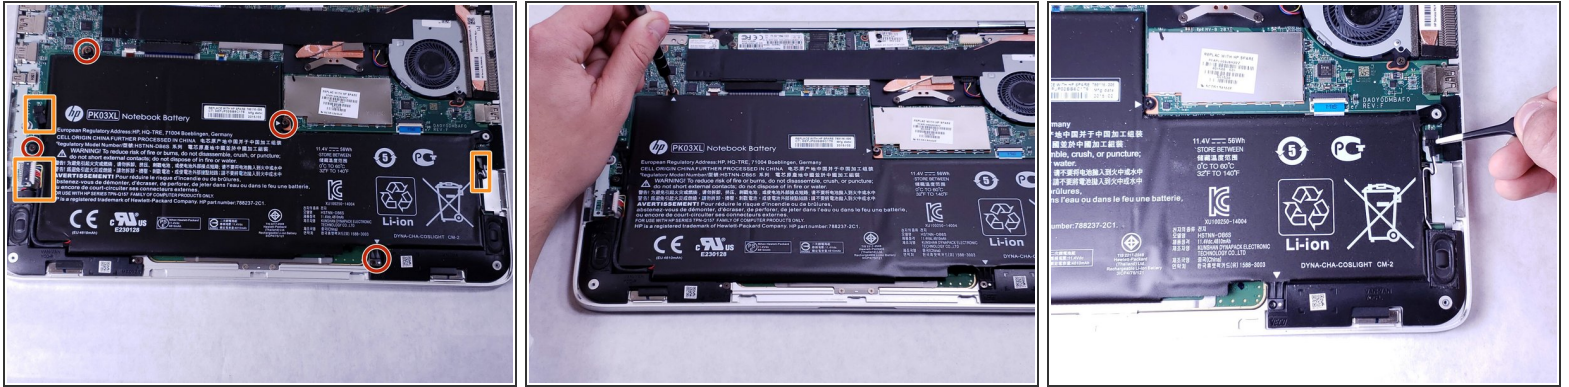

- With the backplate removed, remove the four 3 mm screws securing the battery with a Phillips #1 screwdriver.
- With the screws removed, disconnect the 3 wires connected to the battery.
- ⓘ Tweezers may be needed to remove the wires.

To reassemble your device, follow these instructions in reverse order.