



# Samsung Galaxy S III Battery Replacement

Replace the Battery in your Samsung Galaxy S III.

Written By: Walter Galan



## INTRODUCTION

Use this guide to replace the battery.

If your battery is swollen, [take appropriate precautions](#).



### TOOLS:


- [iFixit Opening Tools](#) (1)



### PARTS:

- [Galaxy S III Battery](#) (1)
-

## Step 1 — Rear Case

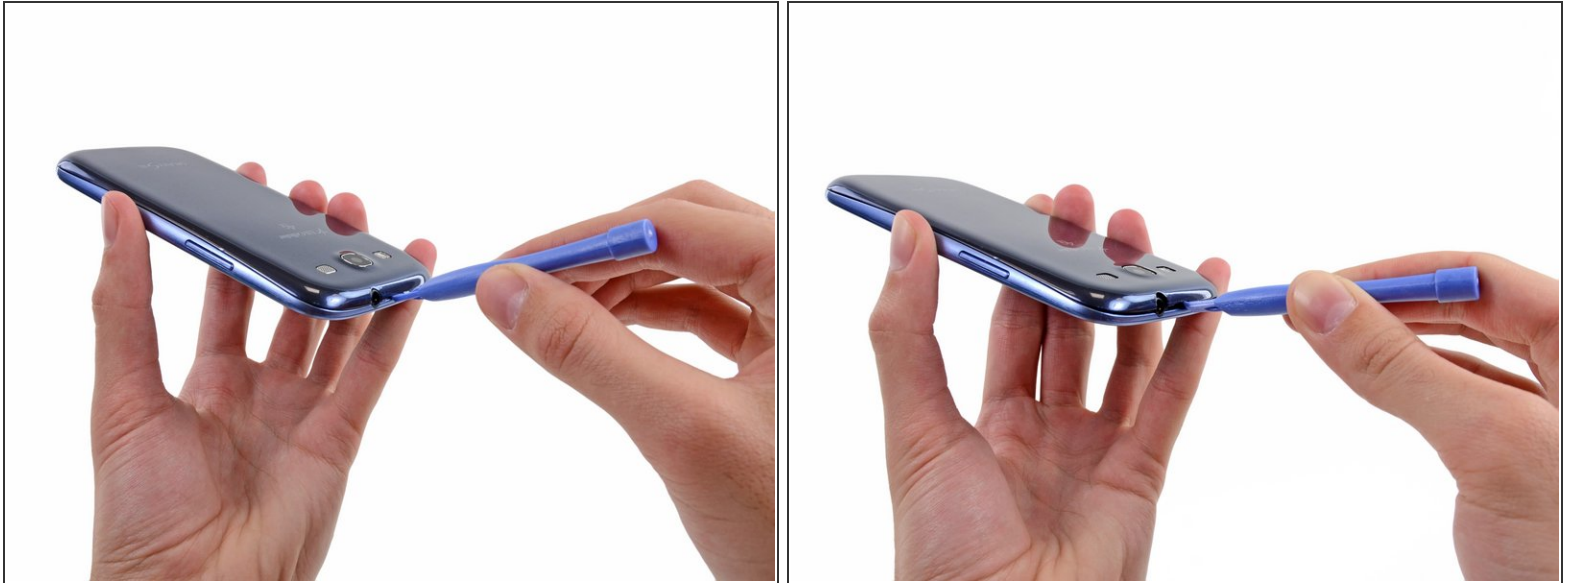

- i** The following four steps can be accomplished without a plastic opening tool. However, it's recommended to use a tool to best avoid breaking any clips along the perimeter of the rear case.
- Insert a plastic opening tool or fingernail into the notch in the gap between the rear case and the rest of the phone, located at the top of the device.
  - Gently twist the opening tool to disconnect the clips securing the top of the rear case.

## Step 2




- Slide the plastic opening tool left along the top edge and repeat the twisting motion to widen the gap between the rear case and the phone.

## Step 3



- Continue to move the plastic opening tool around the perimeter of the top left corner, gently prying up along the rear case.

## Step 4

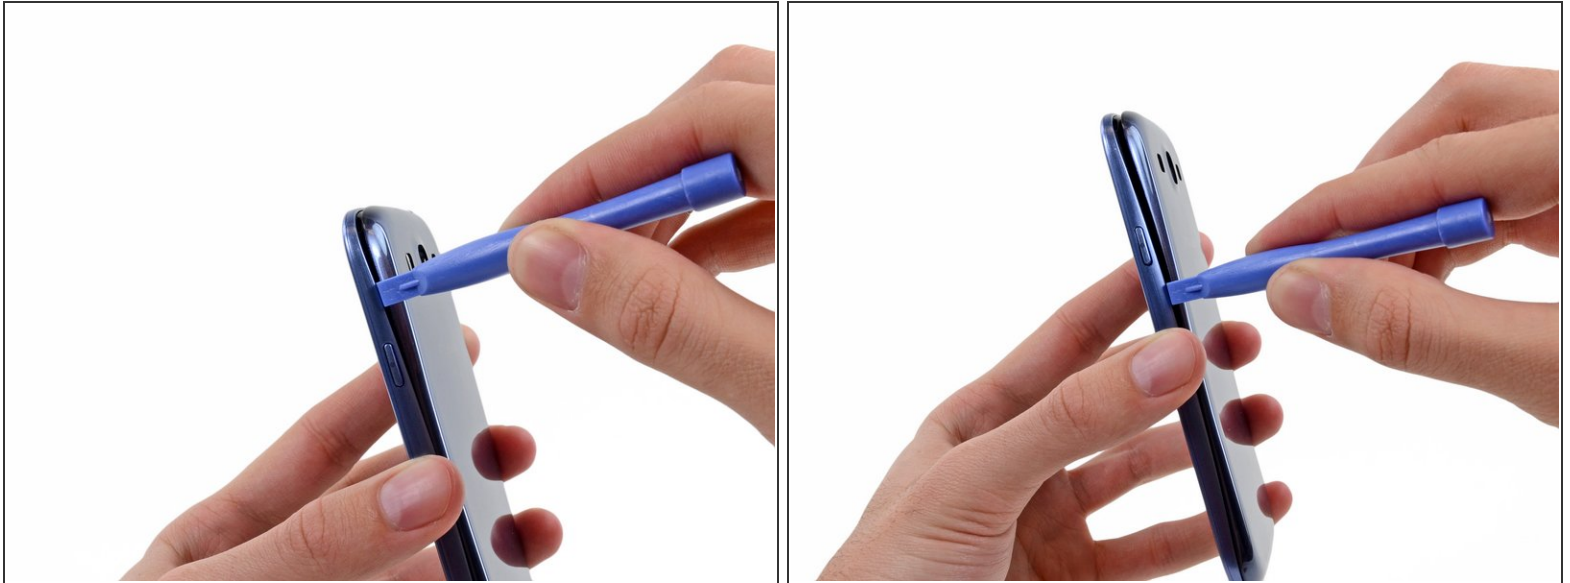

- Pry along the top right side, and continue prying down the right side of the rear case.

## Step 5



- Lift up and remove the rear case from the phone.
- i** You may need to peel the case up to separate it from any clips still holding it to the bottom of the phone.

## Step 6 — Battery



This step can be accomplished without the need of a plastic opening tool. Just use your finger if you want to.

- Wedge a plastic opening tool into the small notch above the battery.
- Pry the battery up out of its recess.

## Step 7



- Remove the battery.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2018-12-11 10:32:33 PM.