




# Disassembly SR405QM Backplate

Removal of the back plate to expose the circuitry of the bass.

Written By: Chris Pittner

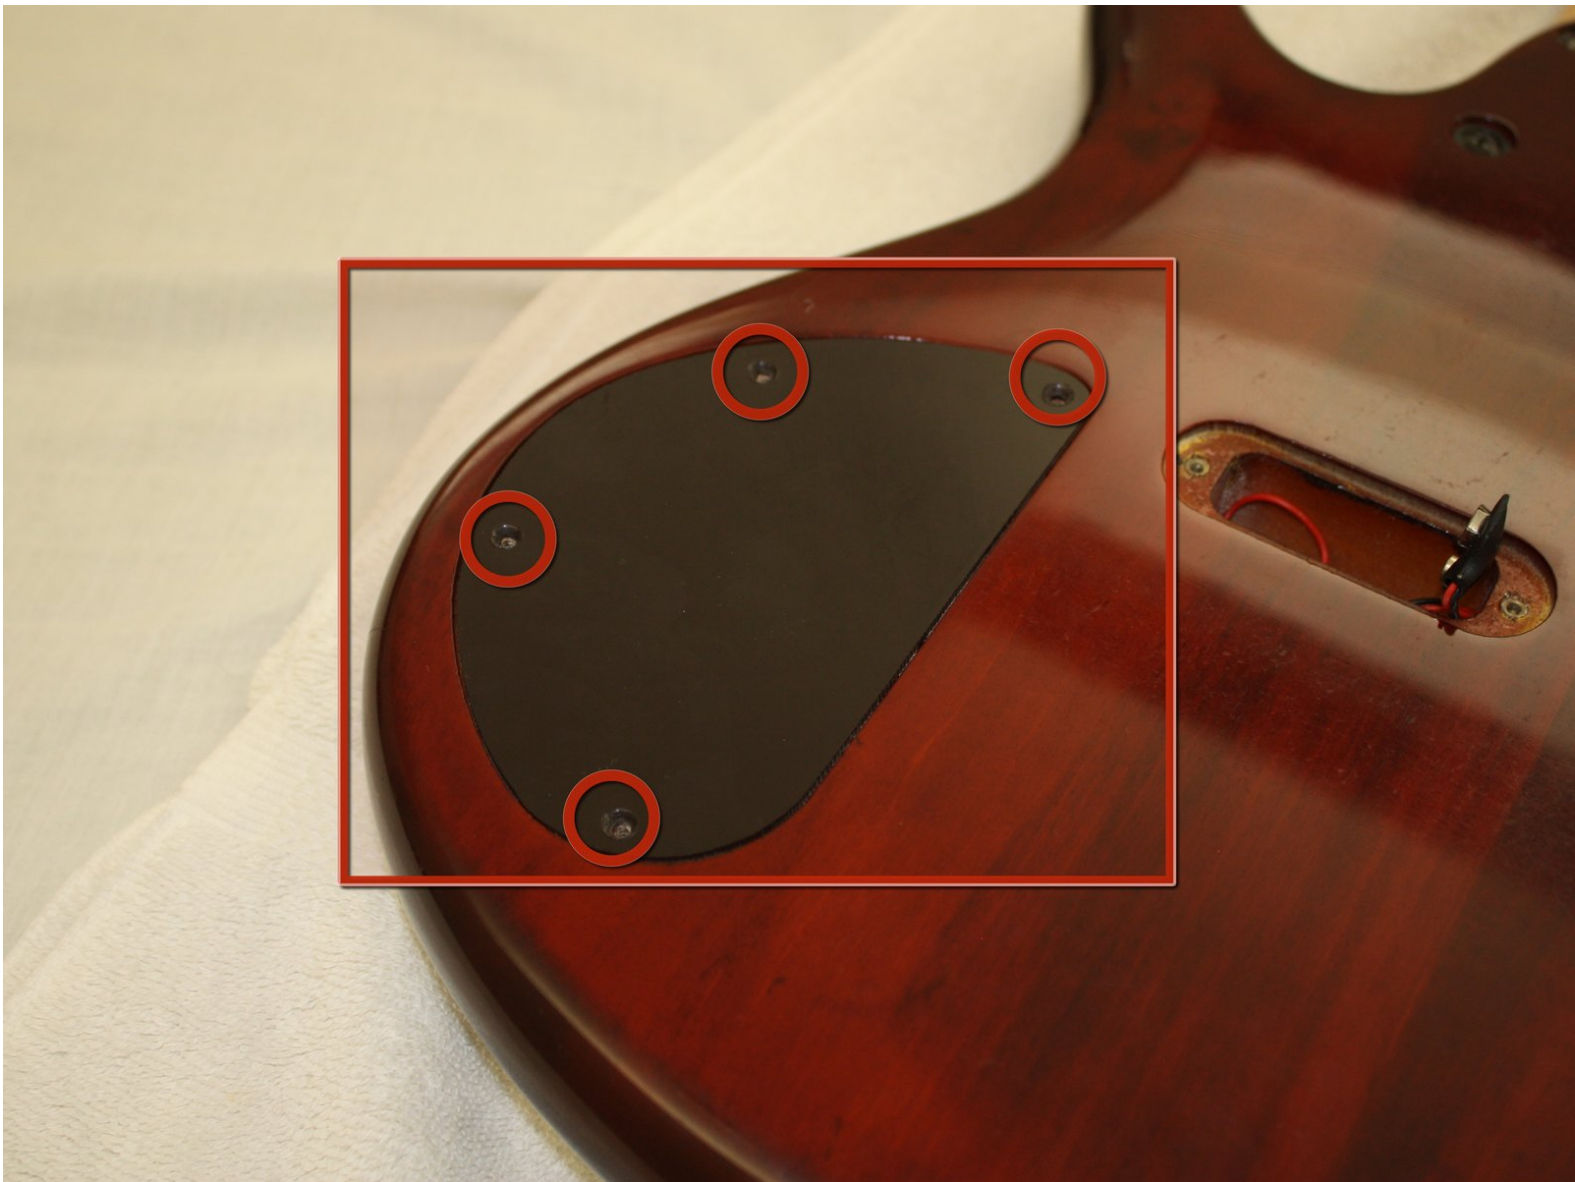

---

## INTRODUCTION


Follow these steps to remove the back plate from your bass guitar.

---

### TOOLS:

- [Phillips #2 Screwdriver](#) (1)
-

## Step 1 — Disassembly SR405QM Backplate

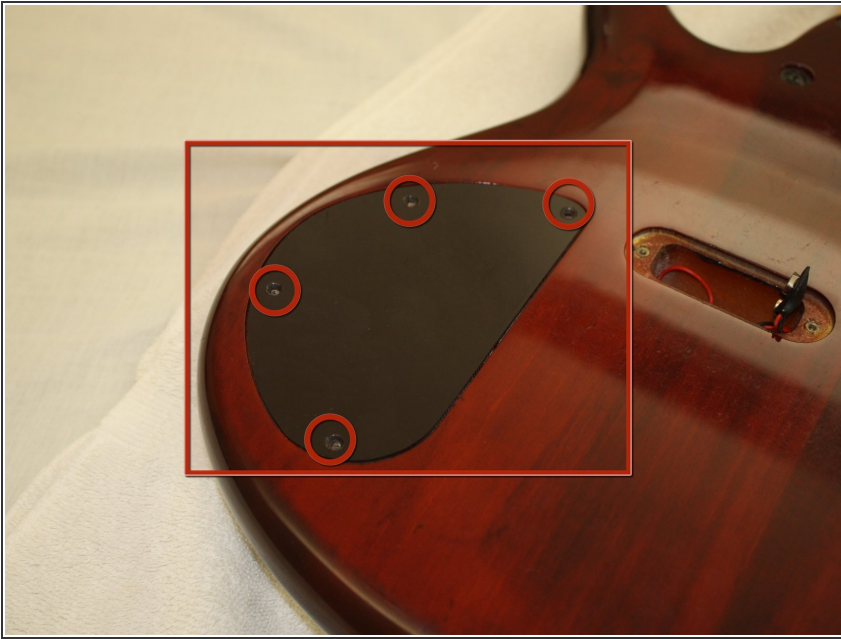


- Locate back plate cap and screws.

## Step 2



- Use a Phillips head screwdriver to remove the four screws, #1-1mm, by turning the screws counter-clockwise.

### Step 3

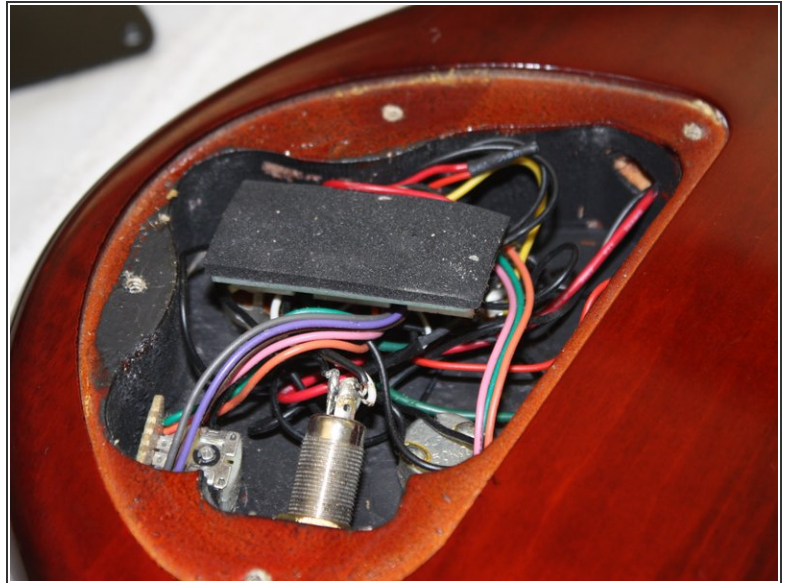

- Remove cap by lifting upwards, revealing the circuitry of the instrument.

To reassemble your device, follow these instructions in reverse order.