



HP Pavilion 13-s128nr Back Panel Replacement

This guide will help you take off the back panel of the HP Pavilion 13-s128nr.

Written By: Sydney Bell



INTRODUCTION

This guide will be used for almost every other replacement guide for the HP Pavilion 13-s128nr. This is because this guide is used for opening up the HP Pavilion 13-s128nr to get to the interior parts.

TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Back Panel




- Use the iFixit opening tool to take off the rubber caps.
- Remove the screws using the Phillips #0 screwdriver.

Step 2

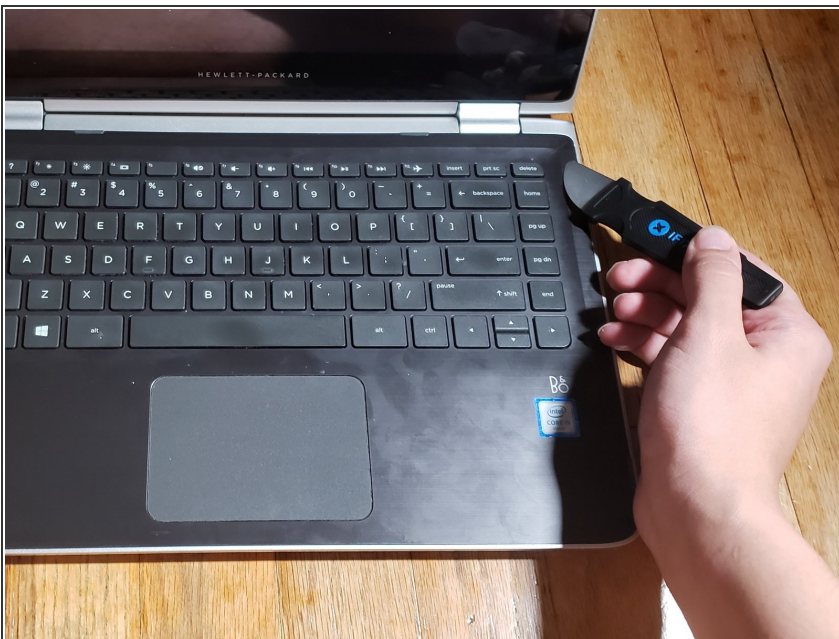

- Use the Jimmy to pry around the seam of the laptop.
 - Remove the back panel of the laptop.
- ⚠** Don't completely remove the back panel as there are ribbon cables that can be easily damaged if removed quickly.

Step 3

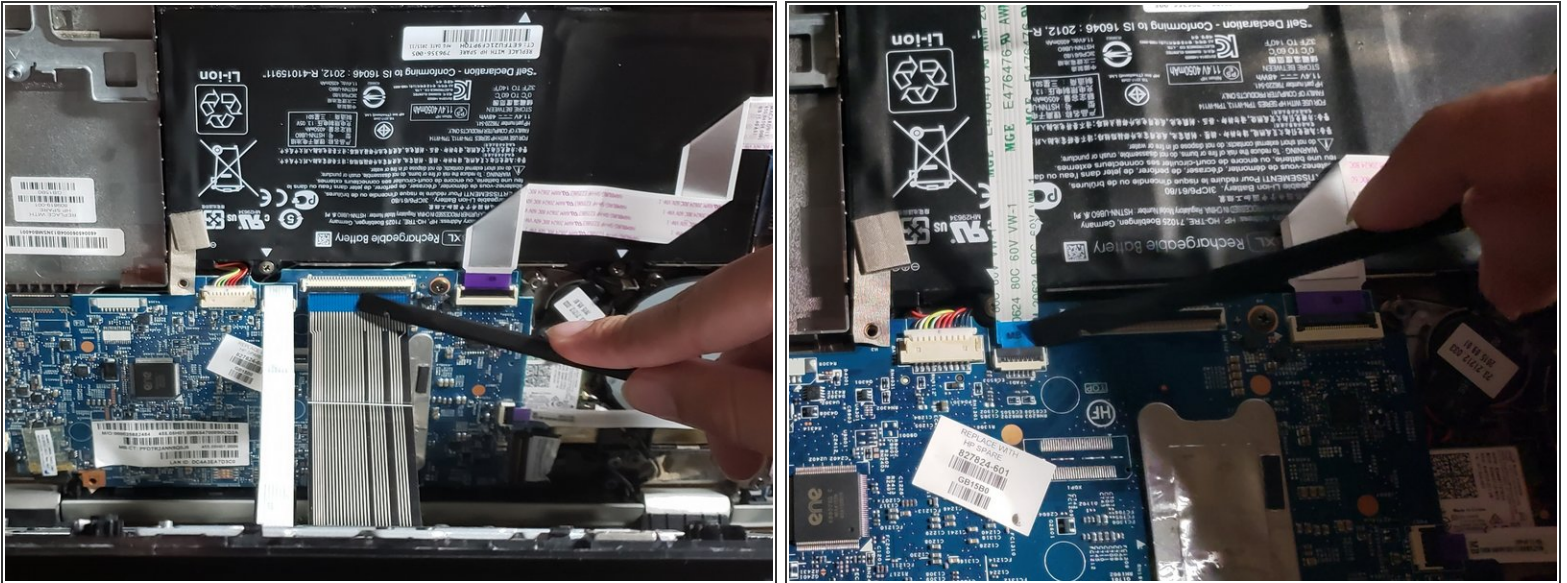

- Using the iFixit opening tool to lift the tabs holding in the cables connecting the keyboard to the motherboard.
- Pull the cable from the motherboard.

To reassemble your device, follow these instructions in reverse order.