




Blackberry 7105t battery contact Replacement

This guide outlines how to remove the battery...

Geschrieben von: kelogan

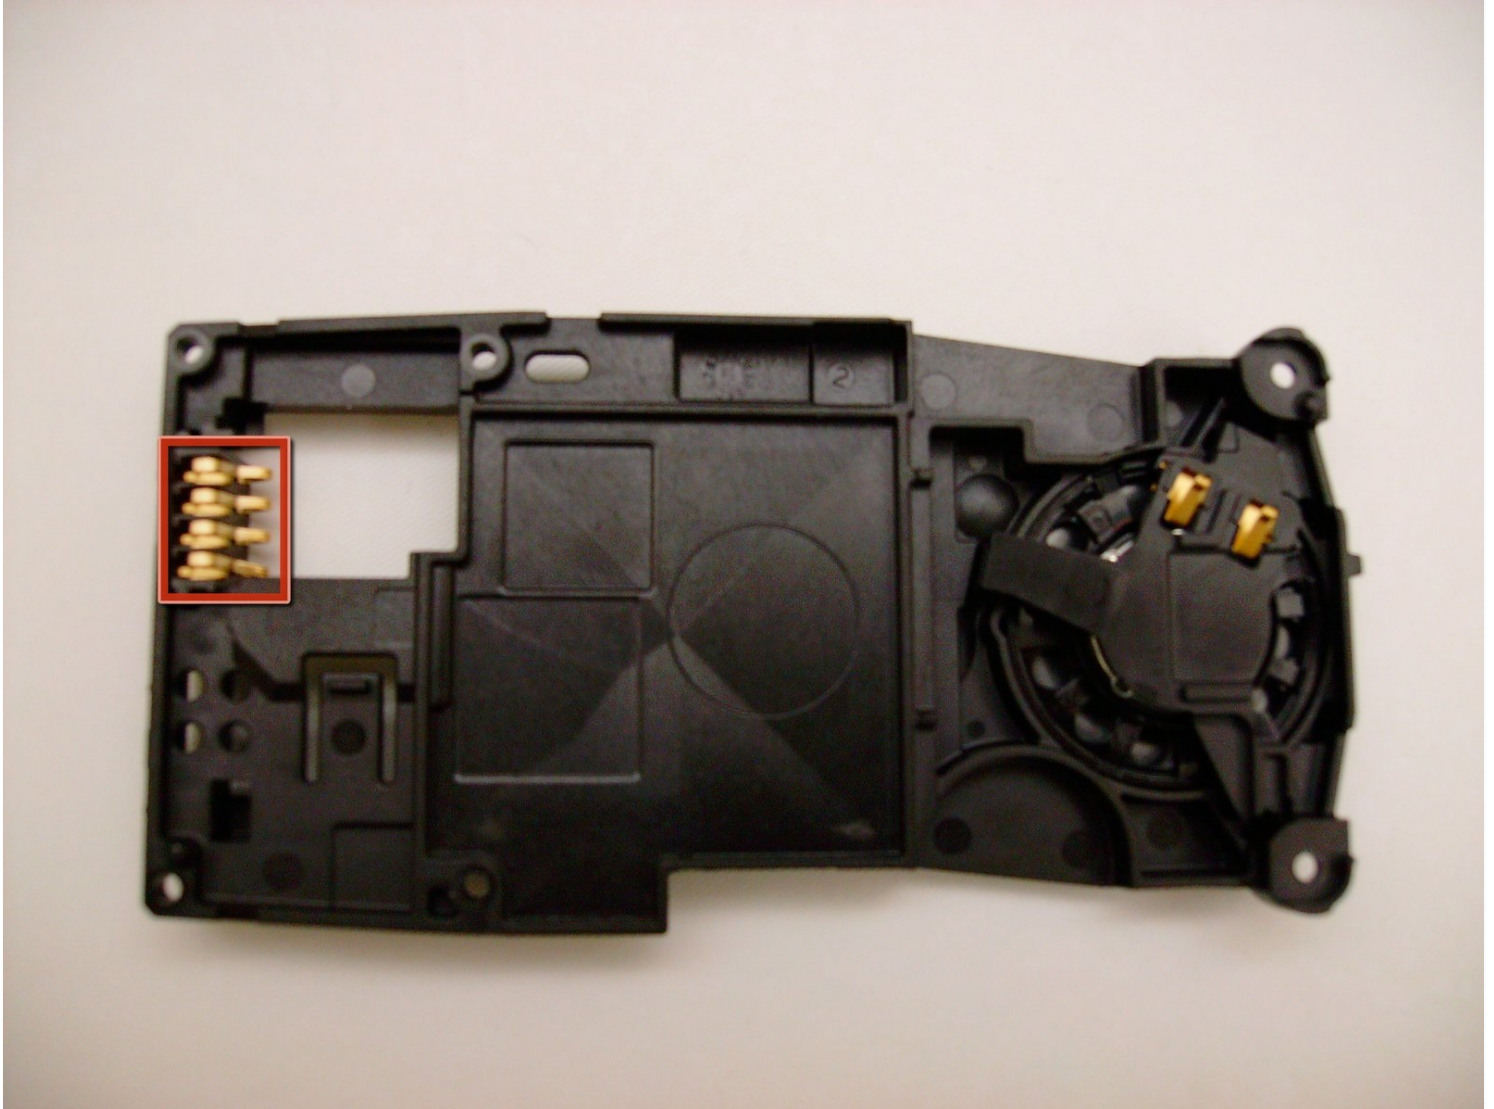

EINLEITUNG


This guide outlines how to remove the battery connector from the device.

WERKZEUGE:

[iFixit Opening Tool](#) (1)


[T6 Torx Screwdriver](#) (1)

Schritt 1 — Blackberry 7105t Disassembly

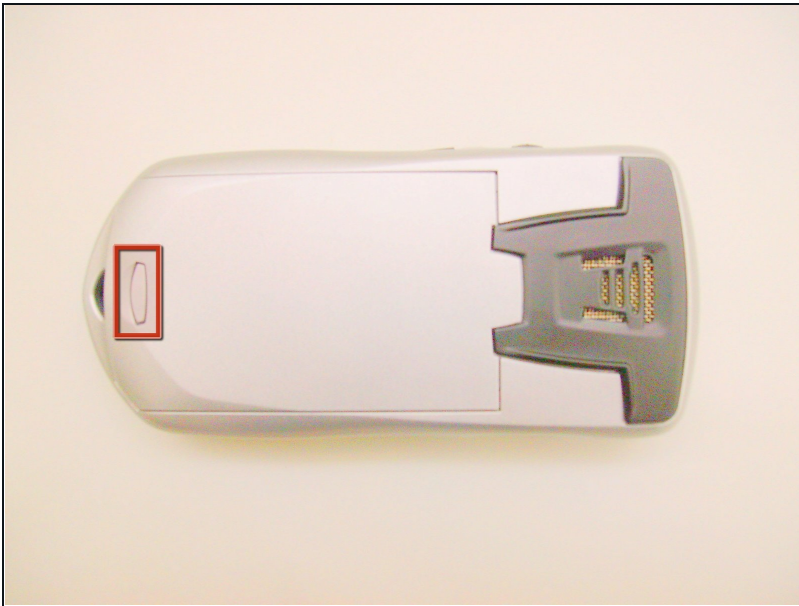


- With the back of the device facing you, press down on the button while sliding the battery casing away from the speaker to remove it.

Schritt 2

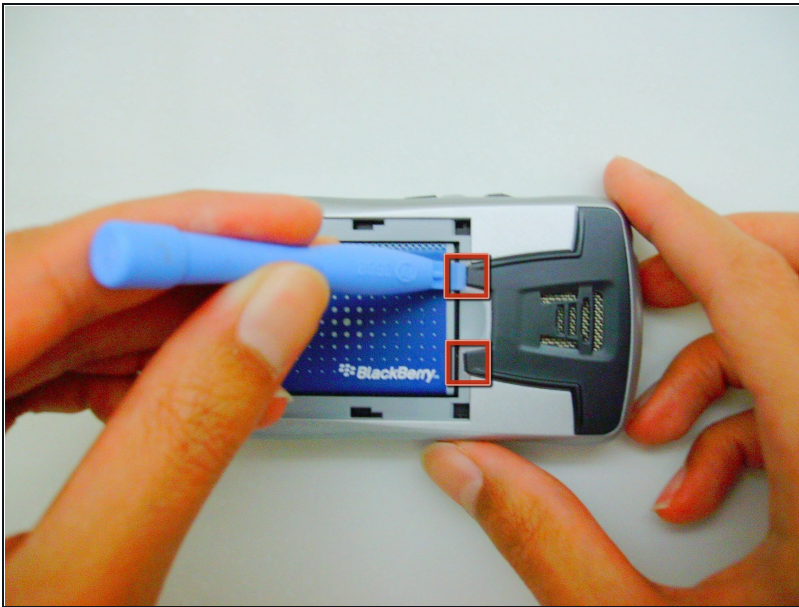


- Use a plastic opening tool or fingernails to unclip the two hinges of the speaker covering and remove it.

Schritt 3

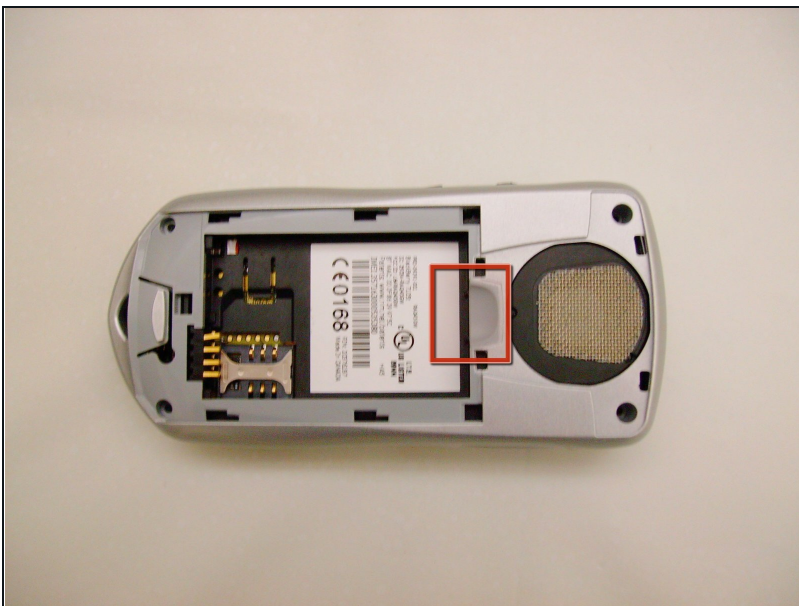


- Remove the battery by pushing against it from the right and then pulling towards you.

Schritt 4

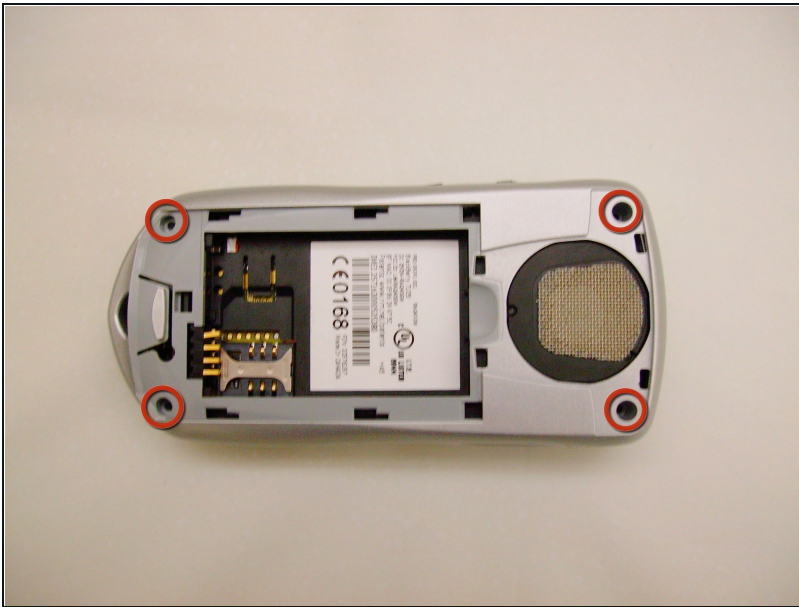

- Remove the four screws indicated in the picture with a #T6 Torx Bit screwdriver and set them aside.

Schritt 5

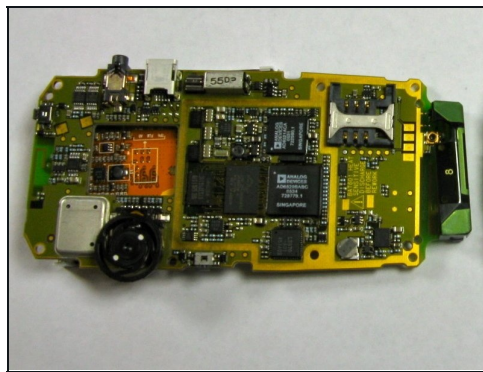


- Use a plastic opening tool or your fingernails to remove the plastic backing.
- Start with the seam indicated in the picture and slide the plastic opening tool until the case is separated.

Schritt 6




- Unscrew the four screws indicated in the picture with #T6 Torx Bit screwdriver.
- Place the four screws released from the phone in a plastic bag.

Schritt 7

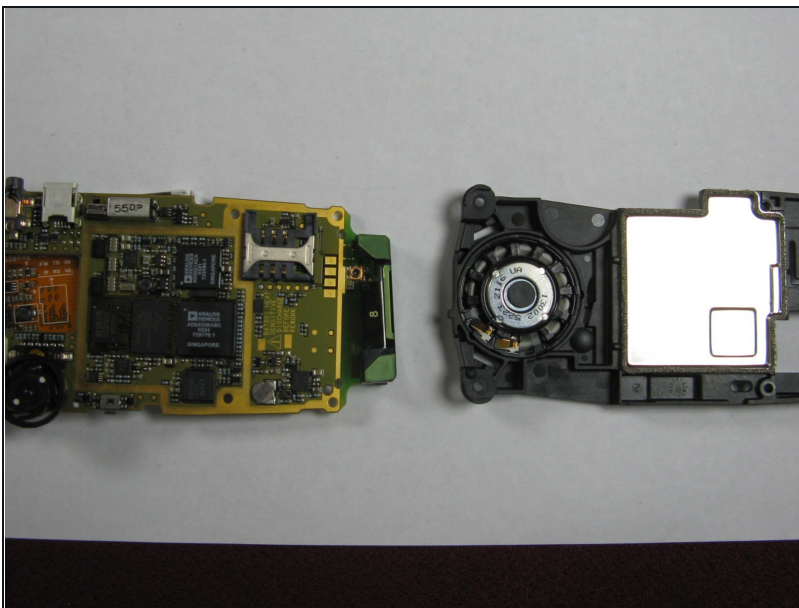

- The black battery casing and logic board can now be separated for the following steps.

Schritt 8 — battery contact

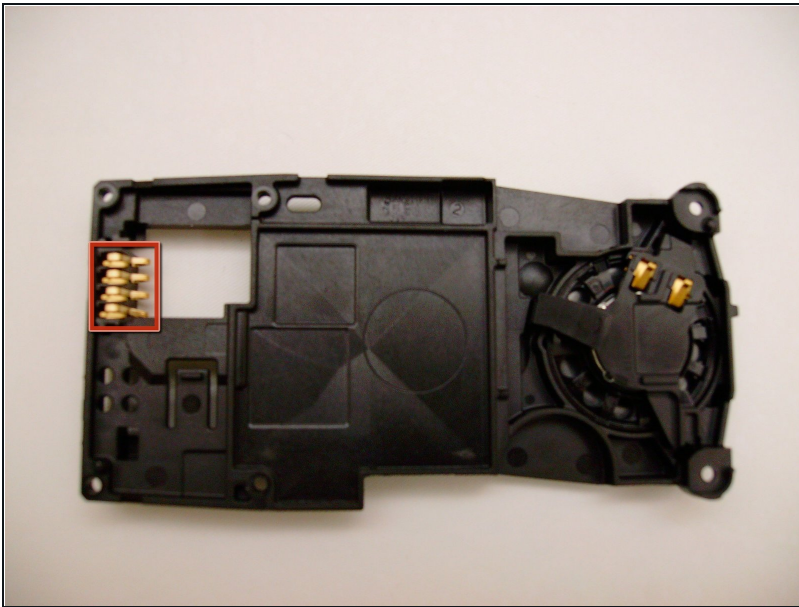

- With the speaker facing you, place your fingers on the gold battery connector.
- Pull upwards and release the battery connector from the black body piece.

To reassemble your device, follow these instructions in reverse order.