



Nokia 6555b Logic Board Replacement

How to remove the logic board from Nokia 6555b.

Written By: Josh Forester



 **TOOLS:**

- [T6 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Logic Board




- Flip phone around and push up on the battery door.

Step 2




- Remove the 4 T6 screws as shown in red.

Step 3

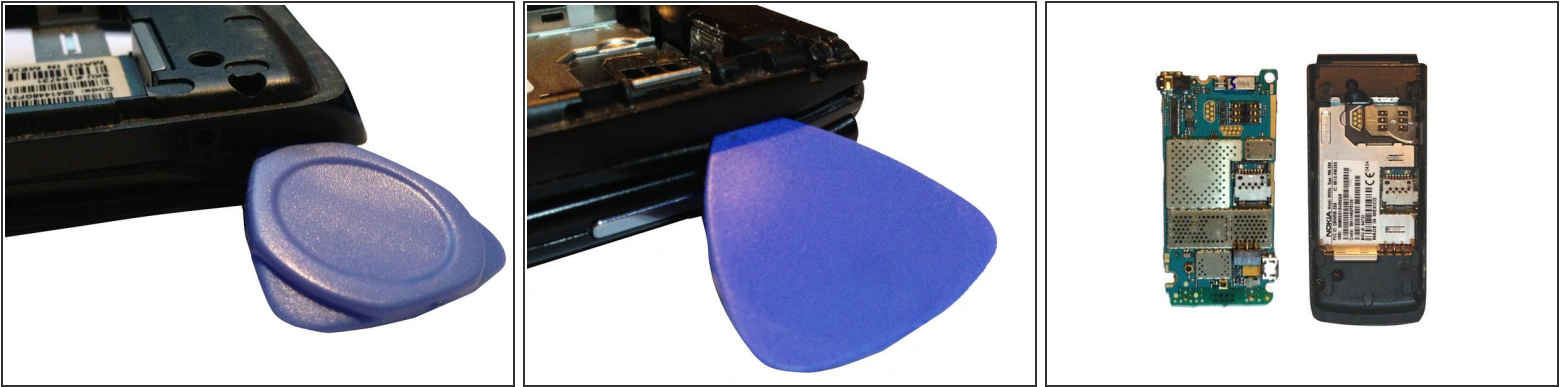


- Start on one side and work your way to the other side.

Step 4

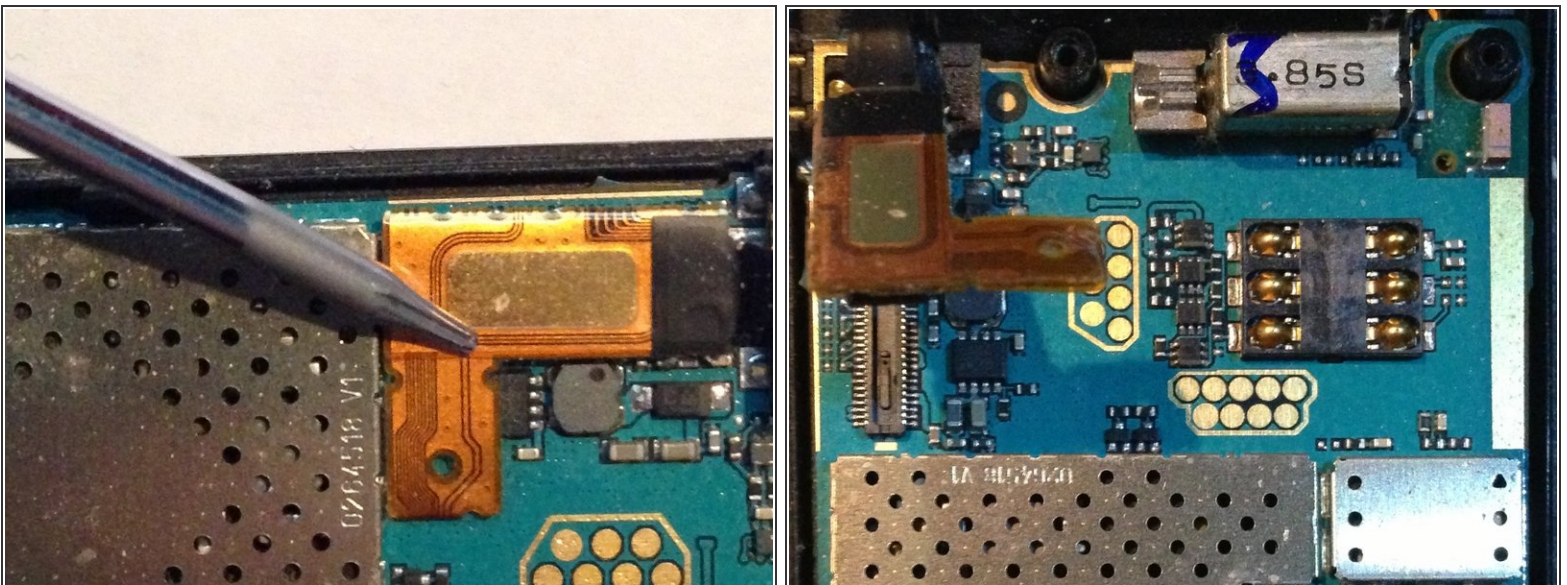

- Find the LCD flex cable on the top left of the board, and release by prying on the left with a pry tool.

Step 5

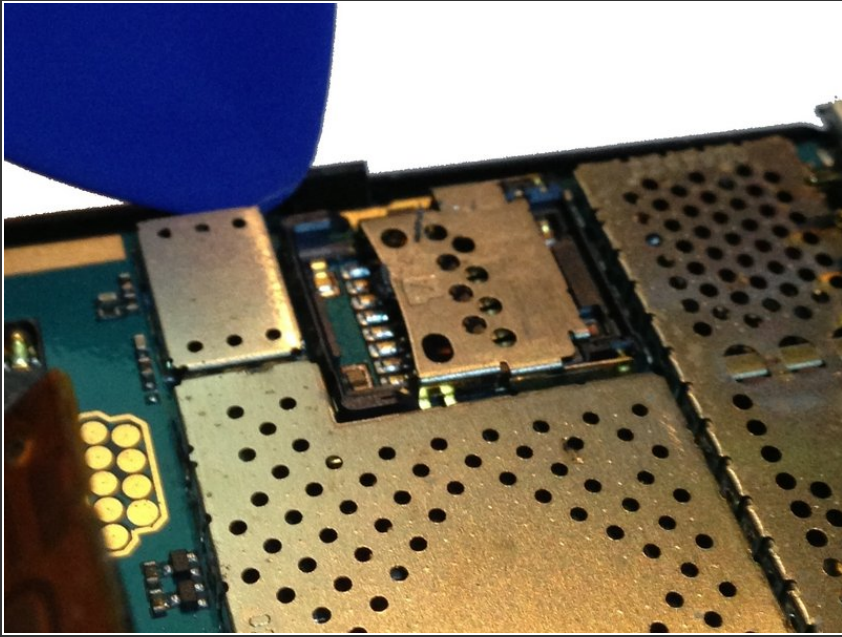

- Remove the logic board from the mid-housing/front section by prying on one side with a safe pry tool.

Step 6



- You have now removed the logic board from your Nokia 6555b.

To reassemble your device, follow these instructions in reverse order.