



Dell XPS 13 9300 Battery Replacement

How to remove and replace the battery for the Dell XPS 13 9300 laptop.

Written By: Scott Head



INTRODUCTION

This guide shows how to remove and replace the battery for the Dell XPS 13 9300 laptop.

For your safety, discharge your battery below 25% before disassembling your device. This reduces the risk of a dangerous thermal event if the battery is accidentally damaged during the repair. If your battery is swollen, [take appropriate precautions](#).

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
- [T5 Torx Screwdriver](#) (1)

PARTS:

- [Dell XPS 13 9300 Replacement Battery](#) (1)

Step 1 — Battery



- i** Be sure to power off and unplug your device before you begin your repair.
- Use a Torx T5 screwdriver to remove the eight screws that secure the base cover to the palm-rest and keyboard assembly

Step 2




- Starting from the bottom-left corner, use a spudger to pry the base cover in the direction of the arrows to release the base cover from the palm-rest and keyboard assembly.

Step 3




- Hold both sides of the base cover and lift to remove the base cover from the laptop.
- ⚠ The pins at the bottom of the base cover for grounding the antennas and the audio board are fragile. Place the base cover on a clean surface to avoid damage to the pins

Step 4

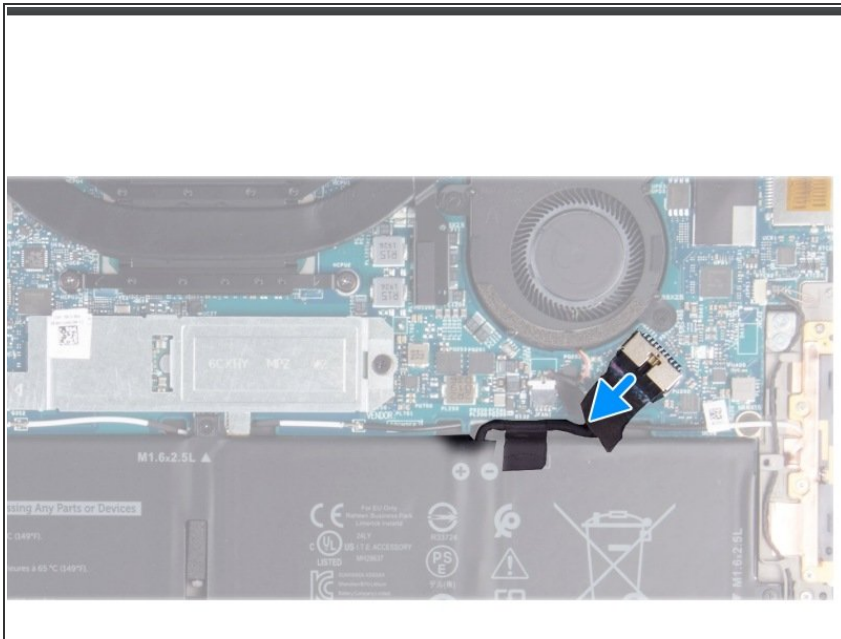

- Using the pull tab, disconnect the battery cable from the system board.

Step 5

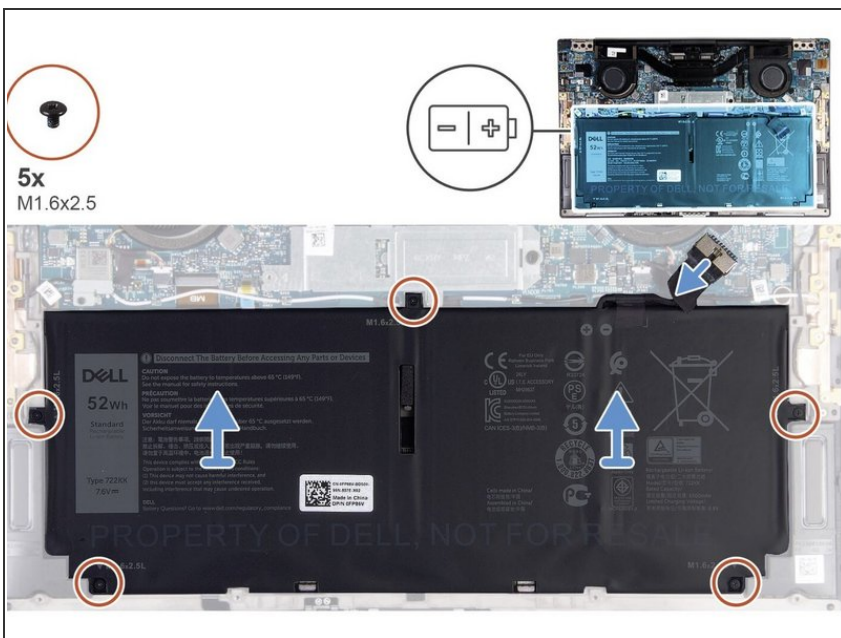

- Use a Phillips screwdriver to remove the five screws securing the battery.
- Lift and remove the battery.
- Hold the laptop's power button down for 15 seconds to drain any residual power from the laptop.

To reassemble your device, follow these instructions in reverse order.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Try some [basic troubleshooting](#), or ask our [Answers community](#) for help.