



# Beats Solo 3 Headband Replacement

This guide will show you how to replace a broken headband in your Beats Solo 3 headphones.

Written By: Joseph Konadu



## INTRODUCTION

If your Beats Solo3 Headband (Model: A1796) isn't fitting comfortably when using it, due to a broken headband, use this guide to replace the headband.

The headband is the main support that connects both speakers, hoses the connecting wires from the left to the right sides of the head phone. It also give the rigid flex when the headphones is worn over the head.

To using this guide, be sure to have purchased the right part for your headphones at amazon.com. Typically, this device would be replaced but this is a cost efficient way to bring the device back to live.

to avoid any electrical failures, be sure to power off the device before starting the fix.

---

### TOOLS:

- [T5 Torx Screwdriver](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Headband




- Carefully remove the sticky residue covering the screws and inner headband.

## Step 2



- Unscrew all four 1.4 mm screws on the right and left ends of the headband using the T5 Torx screwdriver.

### Step 3

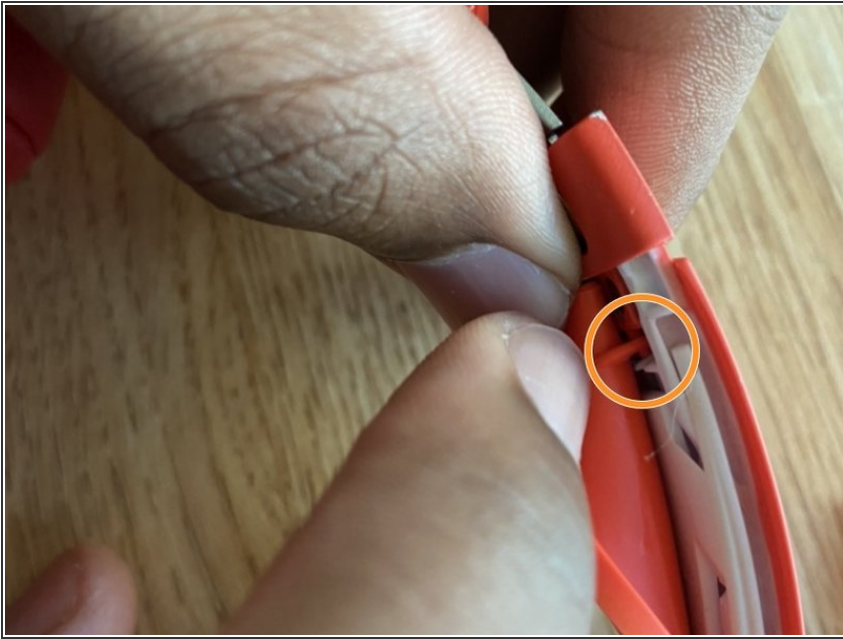

- Disconnect the rubber band from the hook.

### Step 4




- Remove the inner headband by prying the edges and corners.

## Step 5



- Slowly peel the glued wire of the headband.

## Step 6

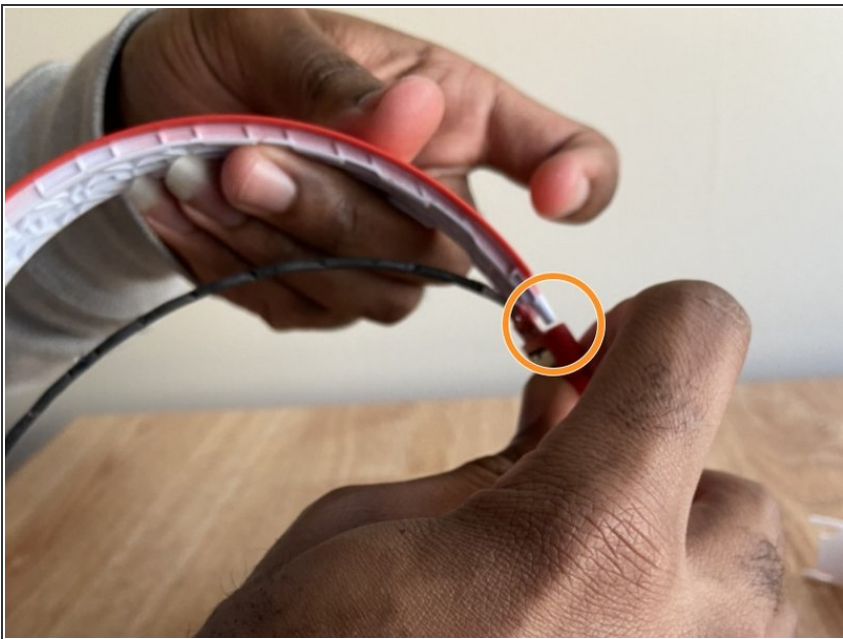

- Pull the headband out of the slots gently.

## Step 7



- Put new headband into the slots carefully.

To reassemble your device, follow these instructions in reverse order.