



Bose SoundLink Color II Battery Replacement

Written By: yellowjellyfish



TOOLS:

[Fer à souder Dexter \(1\)](#)
[iFixit Opening Picks \(Set of 6\) \(1\)](#)
[iFixit Opening Tool \(1\)](#)
[Tamper Resistant TORX Plus TR Bit \(1\)](#)

PARTS:


[Cellule Li-ion 18650 3.6V \(1\)](#)

Step 1 — Battery



- Start by pulling on the outer edges of the rubber part on the bottom of the enclosure.
- Note that it will not detach completely from the enclosure.

Step 2

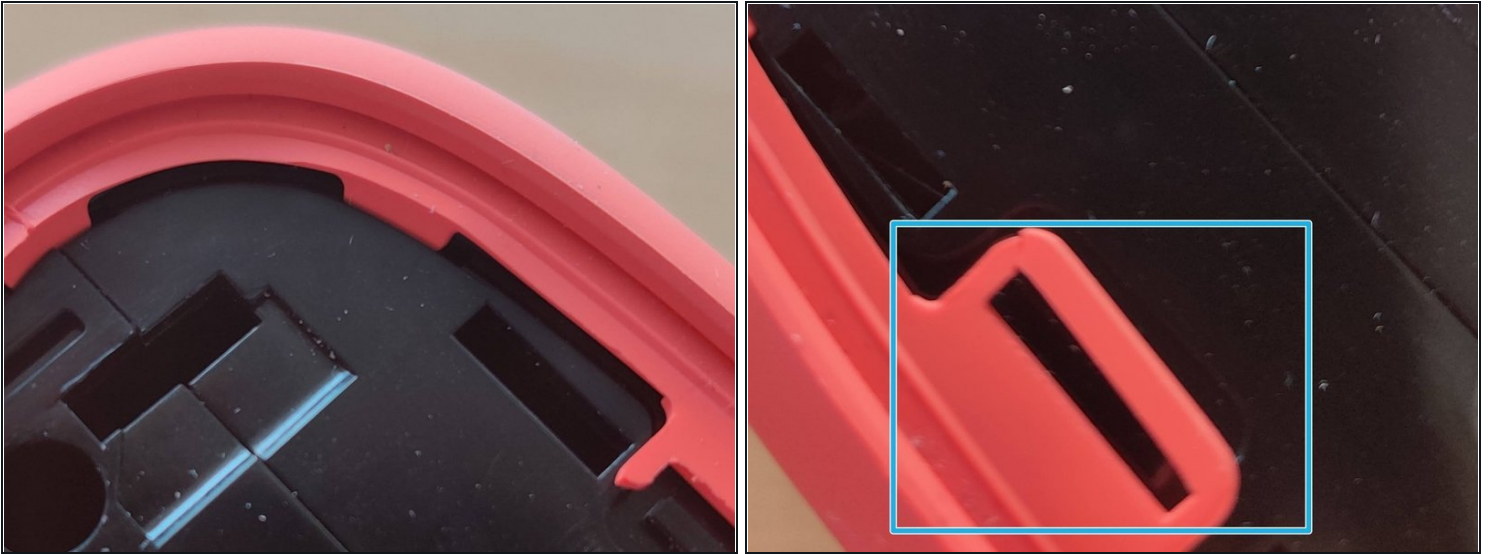

- Pry between the black hard plastic base and the colored rubber casing of your speaker.
- The bottom of the speaker unclips, and you have access to the rings that hold the colored envelope.

Step 3



- Pull on the colored envelope, folding it on itself outwards.
- By removing the cover, the protective foam of the microphone will be damaged, the water resistance will be impacted.

Step 4




- Remove the 7 screws on the back of the enclosure.
- And you access the interior of the enclosure (the battery has already been replaced in the photo shown).

Step 5




- Cleanly cut the foam and battery wrap.
- The foam and the envelope will be used for reassembly (to avoid vibrations).
- Be careful not to puncture the battery or it may catch fire.

Step 6

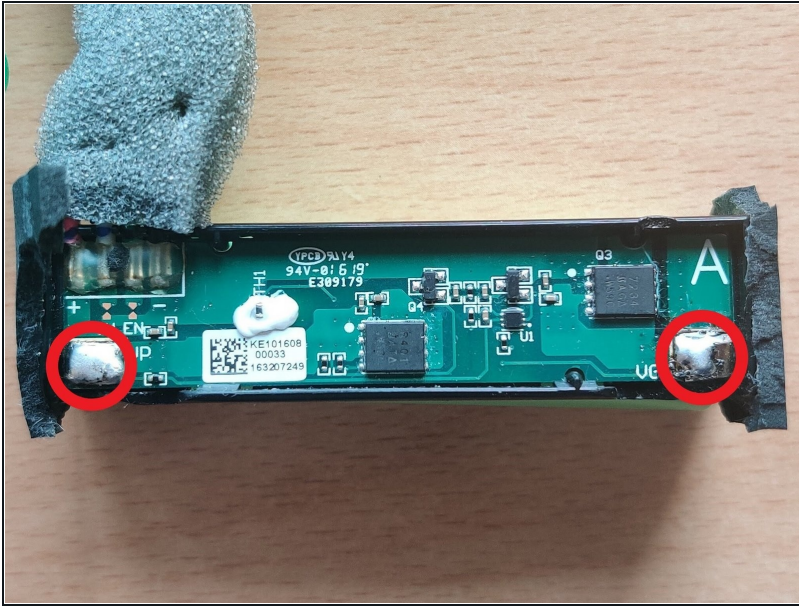

- Unsolder the two legs of the battery and take out the battery.

Step 7

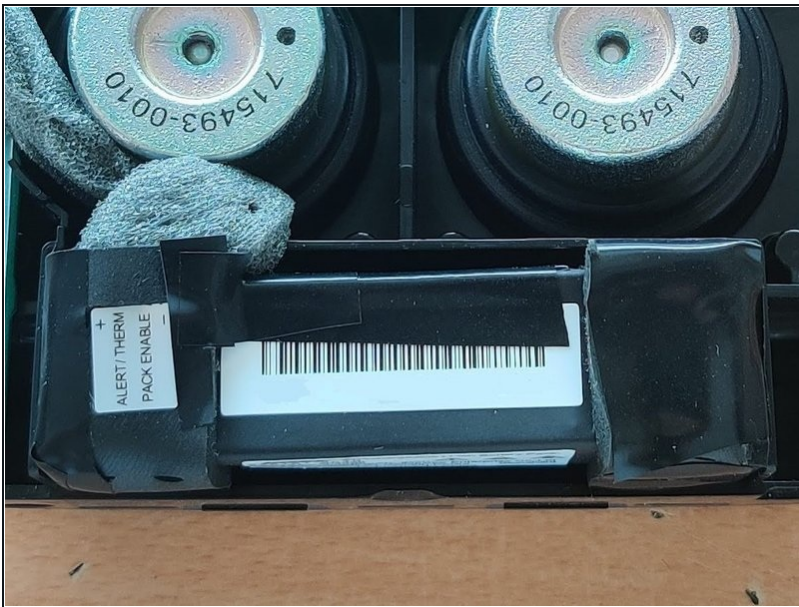

- Solder the new battery, and replace the envelope with the foam, holding everything with tape.
- For reassembly, follow this guide in reverse order.

To reassemble your device, follow the instructions in reverse order.