



# LG VX8560 Side keys Replacement

This guide will demonstrate how to install the keys on the side of the phone

Written By: Kevin



 **TOOLS:**

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

 **PARTS:**

- [LG Chocolate 3 side keys](#) (1)

## Step 1 — Side keys




- Sliding the battery cover off and remove the phone's battery. (see [LG VX8560 Battery Replacement](#) steps 1-3 for help)

## Step 2



- Using your Phillips screwdriver unscrew all 4 screws along the edge of the phone

### Step 3

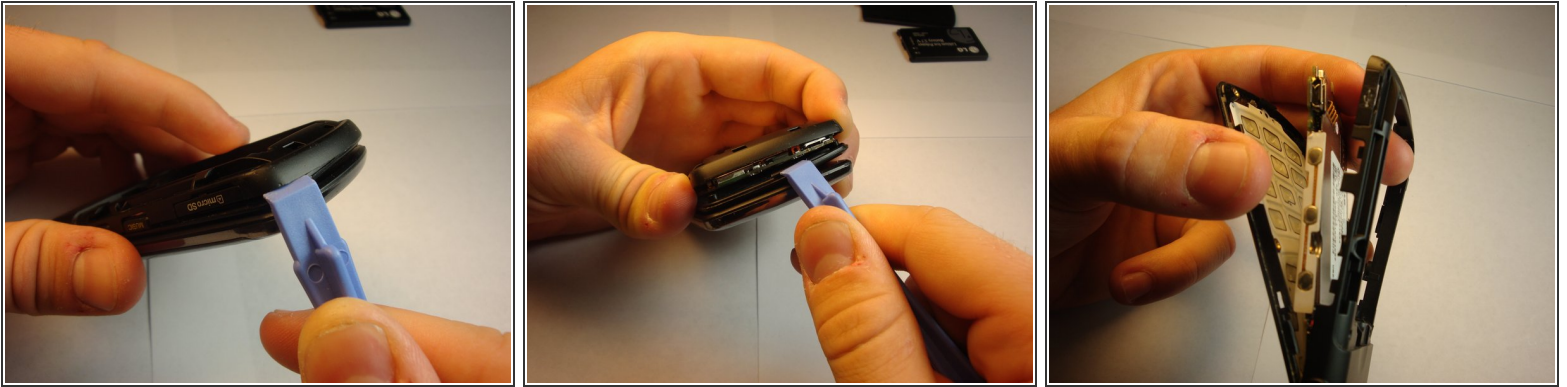

- Using your plastic pry tool, slide the tool between the phone's keypad cover and back cover.
- You should be able to see the motherboard. Don't separate the two covers. They should be held together by a screw at the axis of the phone.

### Step 4



- Place the side keys so that they are aligned with the silver circles located on the side of the motherboard.

To reassemble your device, follow these instructions in reverse order.