



iPhone 14 Rear Glass Replacement

Use this guide to replace a broken rear glass...

Written By: Tobias Isakeit



INTRODUCTION

Use this guide to replace a broken rear glass on your iPhone 14. The rear glass includes the charging coil and rear-facing microphone mounted on it.

This guide was created using the **A2882** (international) model. If you're fixing a different iPhone 14 model, there may be some visual discrepancies, but the procedure should be the same.

For your safety, discharge the battery below 25% before disassembling your device. This reduces the risk of fire if the battery is accidentally damaged during the repair. If your battery is swollen, [take appropriate precautions](#).

Note: On iOS 18 and newer, you can pair new, genuine rear glass parts using Apple's [Repair Assistant](#).

You'll need replacement adhesive to reattach the screen when reassembling the device. Your device will function normally, but will most likely lose its IP (Ingress Protection) rating.



TOOLS:


[Hair Dryer](#) (1)
[P2 Pentalobe Screwdriver iPhone](#) (1)
[iFixit Opening Picks \(Set of 6\)](#) (1)
[Suction Handle](#) (1)
[Tri-point Y000 Screwdriver](#) (1)
[Spudger](#) (1)
[Tweezers](#) (1)
[Packing Tape](#) (1)
[Safety Glasses](#) (1)
[Heat Gun](#) (1)



PARTS:


[iPhone 14 Rear Panel Adhesive](#) (1)
[Precut Double-Sided Adhesive Card](#) (1)

Step 1 — Remove the pentalobe screws

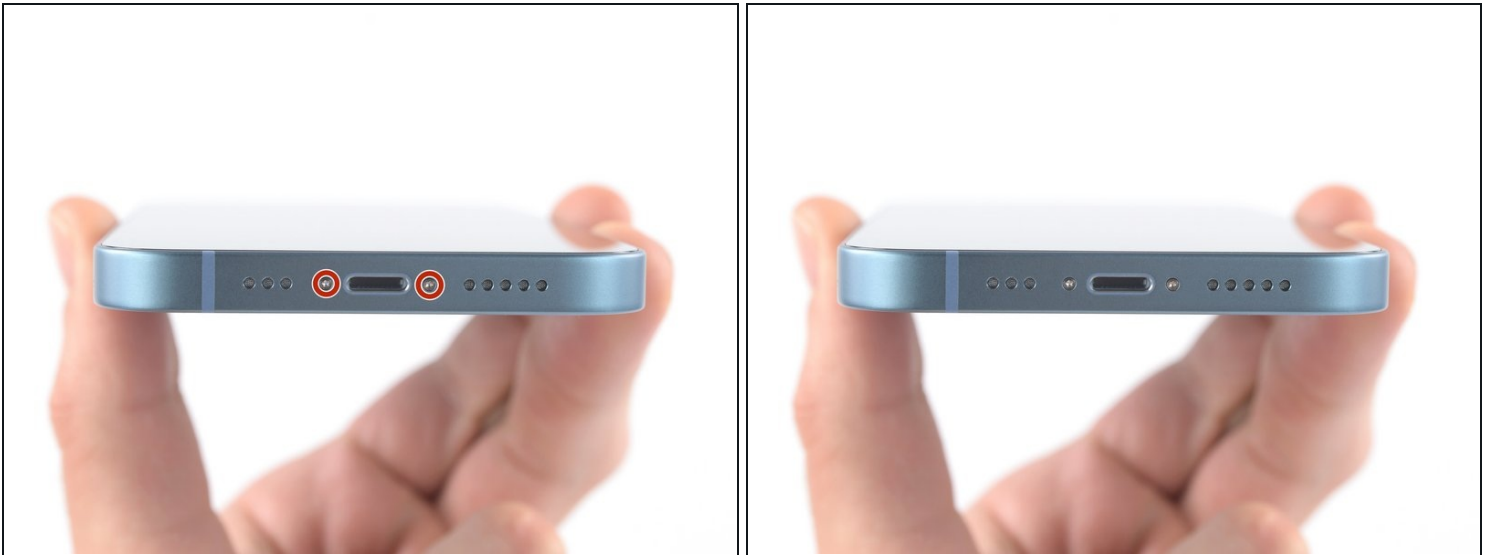

- Power off your iPhone before beginning disassembly.
- Use a P2 pentalobe screwdriver to remove the two 6.8 mm-long screws on either side of the charging port.

Step 2 — Mark your opening picks

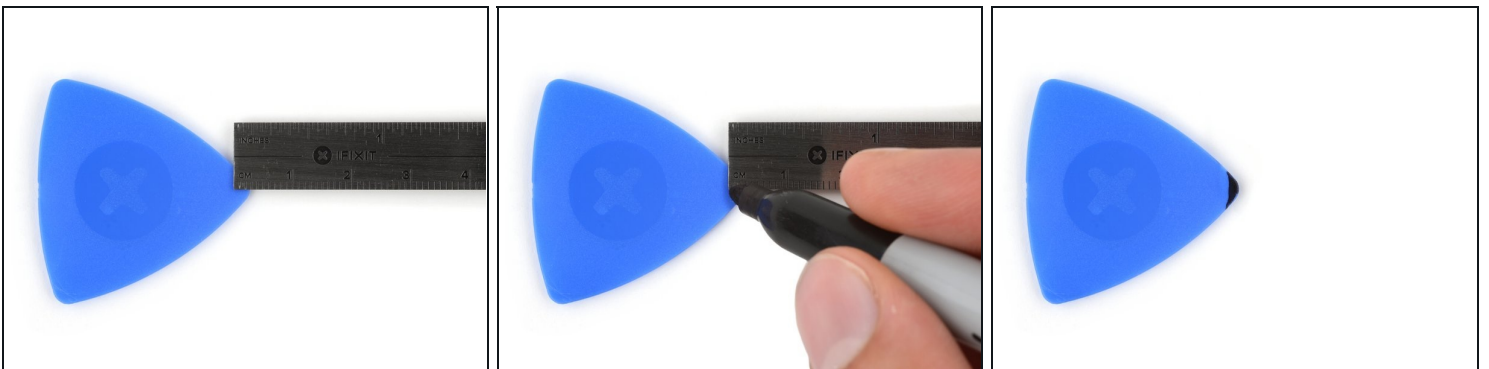

- ① If inserted too far, an opening pick can damage your device. Follow this step to mark your pick and prevent damage.
- Measure 3 mm from the tip and mark the opening pick with a permanent marker.
 - ① You can also mark the other corners of the pick with different measurements.
 - ① Alternatively, [tape a coin to a pick](#) 3 mm from the tip.

Step 3 — Tape over any cracks



- ① If your iPhone has a cracked rear glass, keep further breakage contained and prevent bodily harm during your repair by taping over the glass.
- Lay overlapping strips of clear packing tape over the iPhone's rear glass until the whole face is covered.
- ⚠ Wear safety glasses to protect your eyes from any glass shaken free during the repair.
- If you can't get the suction cup to stick in the next few steps, fold a strong piece of tape (such as duct tape) into a handle and lift the rear glass with that instead.
- ① If all else fails, you can superglue the suction cup to the rear glass.

Step 4 — Heat the bottom edge



- Use a [hair dryer](#) or a [heat gun](#) to heat the bottom edge of the iPhone until the rear glass is slightly too hot to touch.

⚠ **Never leave your heat gun in one spot for an extended period of time.**

Step 5 — Insert an opening pick



- Apply a suction handle to the bottom edge of the rear glass, while avoiding the very edge of the glass.
- Pull up on the suction cup with firm, constant pressure to create a slight gap between the rear glass and the case.
- Insert an opening pick into the gap.


ⓘ The adhesive holding the rear glass in place is very strong; creating this initial gap takes a significant amount of force. If you're having a hard time opening a gap, apply more heat, and gently rock the rear glass up and down to weaken the adhesive until you create enough of a gap to insert your opening pick.

Step 6 — Heat the left edge



- Heat the left edge of the iPhone until the rear glass is slightly too hot to touch.

Step 7 — Slice the left edge adhesive

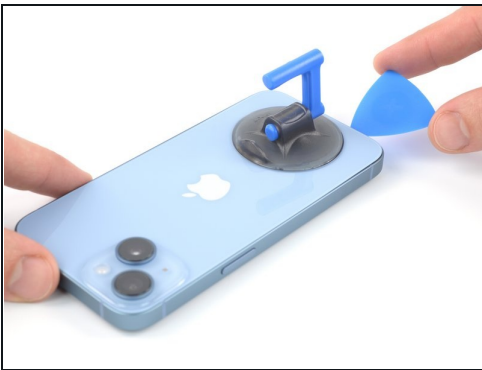

- Slide the opening pick around the lower left corner and up the left edge of the iPhone, slicing through the adhesive holding the rear glass in place.

⚠ Don't insert your pick more than 3 mm, as you may damage internal components.

Step 8 — Rear glass information



⚠ There's a delicate cable along the right edge, next to the **volume up** button. **Don't insert your pick here**, as you may damage the cable.

Step 9 — Heat the right edge



- Heat the right edge of the iPhone (the edge with the volume buttons) until the rear glass is slightly too hot to touch.


Step 10 — Slice the right edge adhesive



- Re-insert your pick at the bottom edge of the iPhone, and slide it up the right side to continue separating the adhesive.

⚠ Don't insert your pick more than 3 mm, as you may damage the charging coil cable.

Step 11 — Heat the top edge

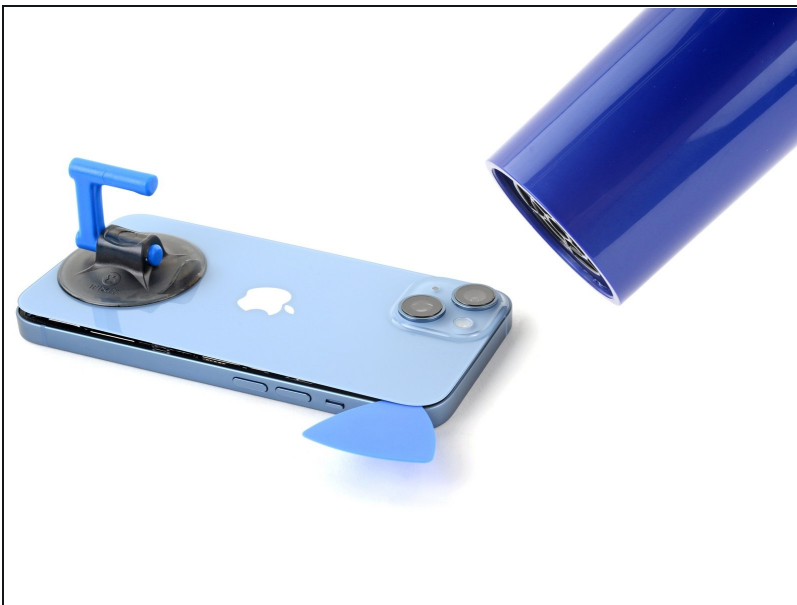

- Heat the top edge of the iPhone until the rear glass is slightly too hot to touch.

Step 12 — Slice the top edge adhesive



- Insert your pick underneath the top right edge of the phone. Slide it around the top-right corner and halfway across the top edge.

Step 13




- Insert your pick underneath the top-left edge of the phone. Slide it around the top-left corner and halfway across the top edge.

⚠ Don't insert the pick more than 3 mm, as you may damage or smear the camera array.


⚠ Don't try to fully separate the rear glass yet, as a fragile ribbon cable still connects it to the iPhone's logic board.

Step 14 — Open the iPhone

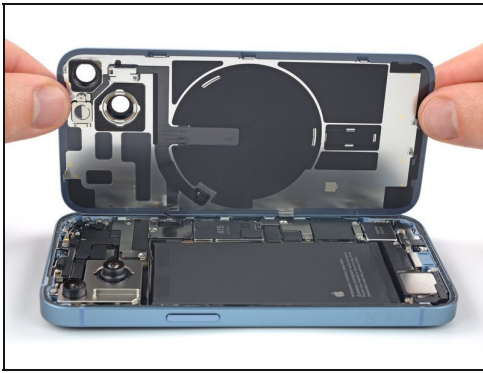

- Remove your suction handle from the rear glass.
- Slowly open your iPhone by swinging the rear glass up from the left side, like the back cover of a book.
 - ⚠ Be careful not to strain the short charging coil flex cable.
- Lean the rear glass against something to keep it propped up while you're working on the phone.
 - If you don't have anything at hand to lean the rear glass against, your [suction handle can do the trick](#).
- ☑ During reassembly, lay the rear glass in position, align the clips along the top edge, and carefully press the top edge into place before snapping the rest down. If it doesn't click easily into place, check the condition of the clips around the perimeter of the rear glass and make sure they aren't bent.

Step 15 — Unfasten the battery connector cover screws

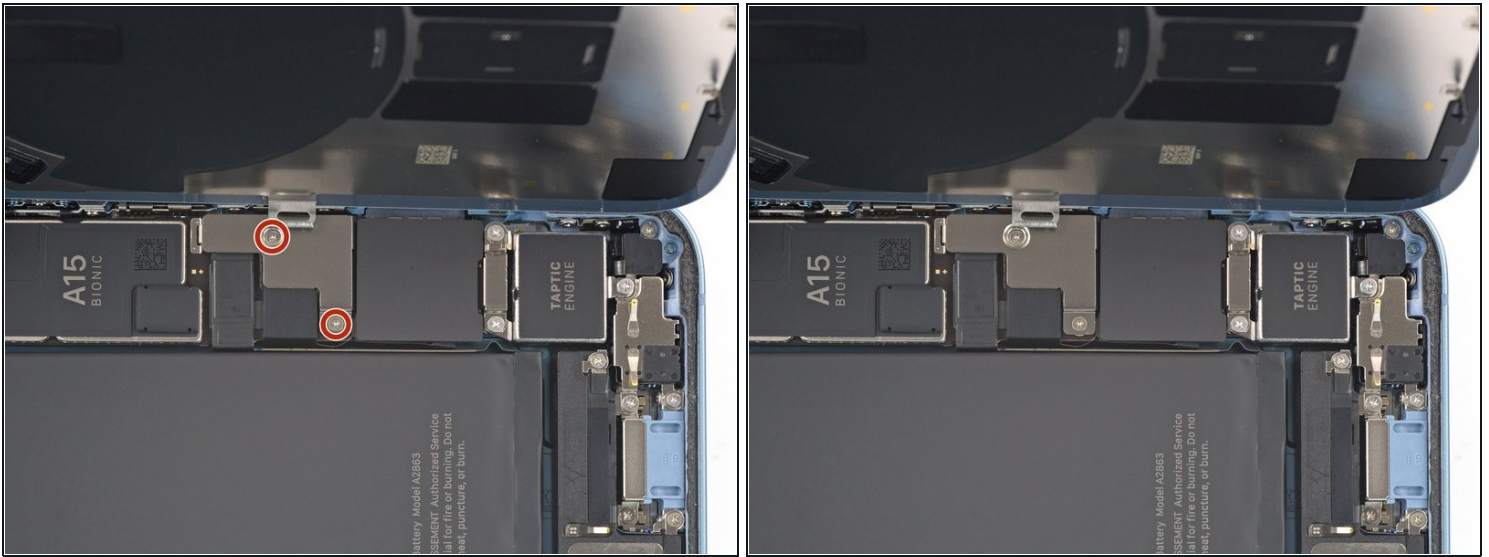

- Use a Y000 screwdriver to remove the two 1.3 mm-long screws securing the battery connector cover.
- ⓘ Throughout this repair, [keep track of each screw](#) and make sure it goes back exactly where it came from to avoid damaging your iPhone.
- ☑ During reassembly, this is a good point to power on your iPhone and test all functions before you seal the display in place. Be sure to power your iPhone back down completely before you continue working.

Step 16 — Remove the battery connector cover



- Grasp the battery connector cover with a pair of [tweezers](#) and slide it upwards (towards the A15 print) to unlatch the [top hook](#).
- Remove the battery connector cover.

Step 17 — Disconnect the battery




- Use the pointed end of a spudger to disconnect the battery cable by prying the connector straight up from its socket.
 - ⓘ Try not to damage the black silicone seal surrounding this and other board connections. These seals provide extra protection against water and dust intrusion.
- Bend the connector slightly away from the logic board to prevent it from accidentally making contact with the socket and providing power to the phone during your repair.

Step 18 — Unfasten the charging coil connector cover screw




- Use a Y000 screwdriver to remove the single 1.0 mm-long screw securing the charging coil connector cover.

Step 19 — Remove the charging coil connector bracket

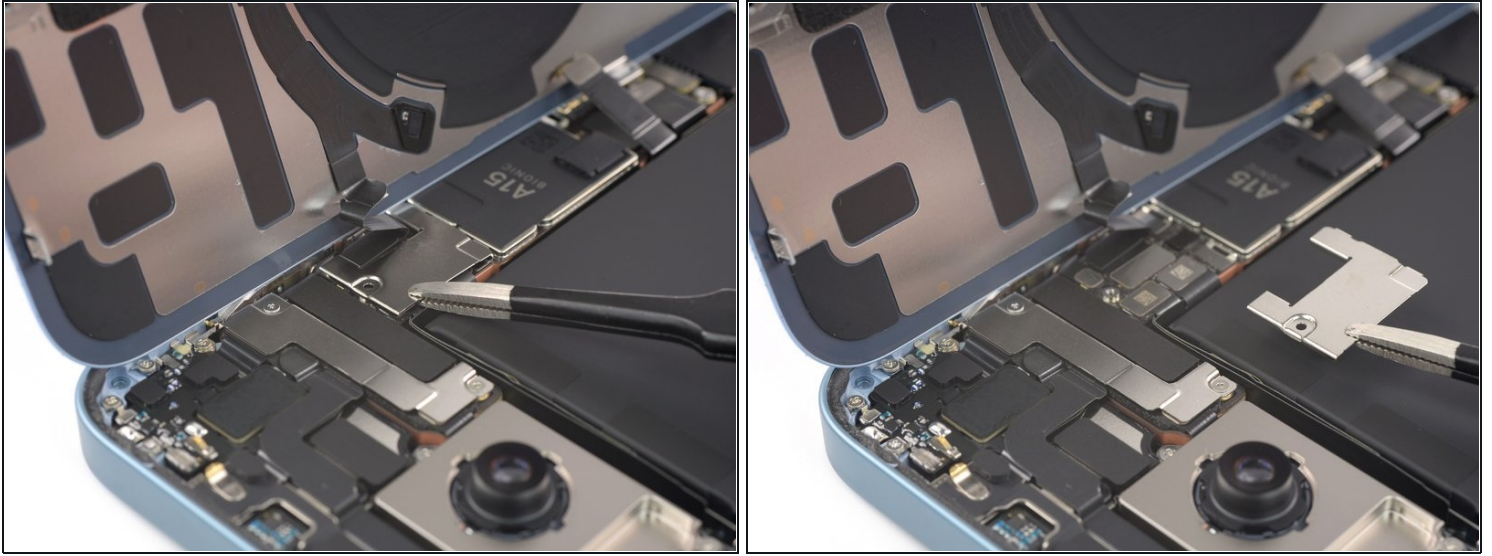

- Use a pair of tweezers to remove the charging coil connector cover.

Step 20 — Disconnect the charging coil

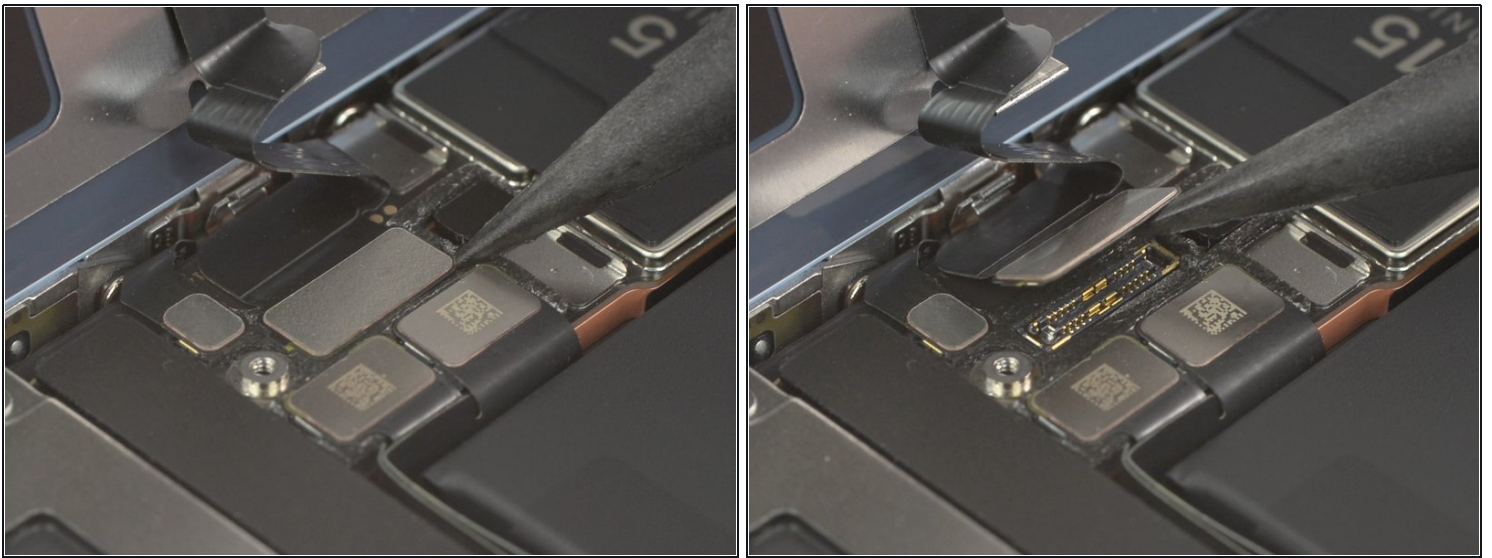

- Use the pointed end of a spudger to disconnect the charging coil cable by prying the connector straight up from its socket.

Step 21 — Remove the rear glass assembly



- Remove the rear glass assembly.
- ☑ Apply new adhesive where it's necessary after cleaning the relevant areas with isopropyl alcohol (>90%).
- ☑ During reassembly, pause here if you wish to [replace the rear glass adhesives](#).

Compare your new replacement part to the original part—you may need to transfer remaining components or remove adhesive backings from the new part before installing.

To reassemble your device, follow the above steps in reverse order.

After your repair, depending on the replacement part, you may be able to [calibrate it using Apple's Repair Assistant](#), available as of iOS 18. Update your device, navigate to Settings → General → About → Parts & Service History, tap Restart & Finish Repair, and follow the onscreen prompts.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Try some [basic troubleshooting](#), or ask our [Answers community](#) for troubleshooting help.